Ex. No: 3 | Analyse Behaviour of Network devices using CISCO PACKET TRACER

30.7.26

AIM:

To analyse the behaviour of network devices using CISCO PACKET TRACER simulator.

Procedure:

1. From the network component box, click and drag and drop the below components:
   a. 4 Generic PCs and one HUB
   b. 4 Generic PCs and one Switch
2. Click on Connections.
   a. Click on Copper Straight-Through Cable.
   b. Select one of the PC and connect it to HUB using cable. The link LED should glow in green, indicating that the link is up. Similarly connect remaining 3 PCs to HUB.
   c. Similarly connect 4 PCs to the Switch using copper Straight-Through Cable.

3. Click on the PCs connected to hub, go to Desktop tab, click on IP configuration, and enter an IP address and subnet mask. Here, the default gateway and DNS server information is not needed as there are only two end devices in network.


Click on PDU (message icon),

a. Drag and drop it on one of PC (source machine) and drop it on another PC (destination machine) connected to HUB.

4. Observe the flow of PDU from source PC to destination PC by selecting the Realtime mode of simulation.

5. Repeat step #3 to step #5 for the PCs connected to the switch.

6. Observe how HUB and switch are forwarding the PDU and write your observation and conclusion about the behaviours of switch and HUB.

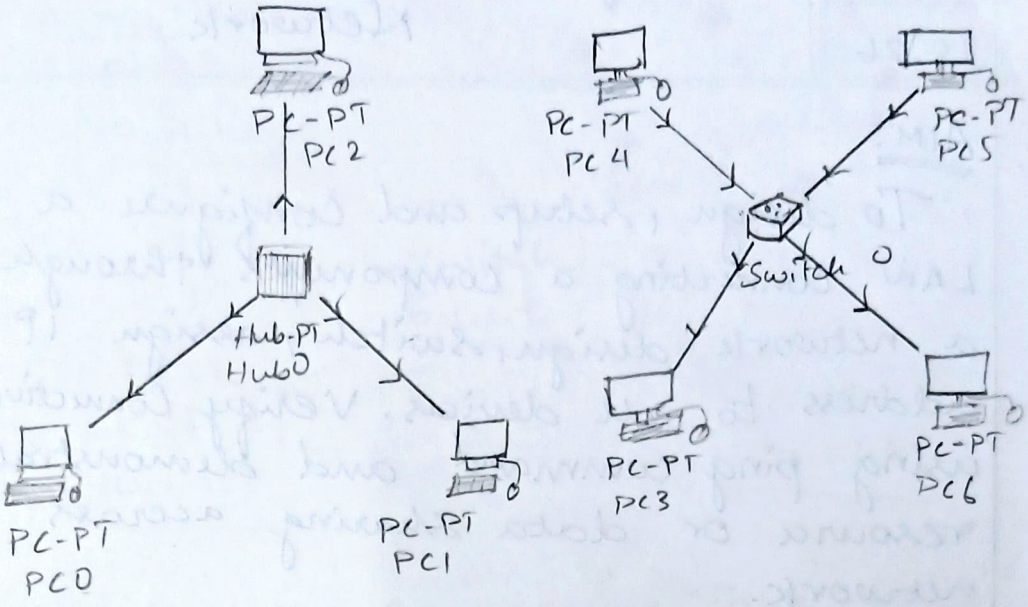

PC0		PC1	
IP Configuration		IP Configuration	
○ DHCP ◉ Static		○ DHCP ◉ Static	
IP address	10.1.1.1	IP address	10.1.1.2
Subnet Mask	255.0.0.0	Subnet Mask	255.0.0.0
Default Gateway		Default Gateway	
DNS Server		DNS Server	

Result:

Thus, the behaviour of network devices using CISCO PACKET TRACER simulation has been analysed.