

# Implementation of Security System using Computer Vision and Temperature Detection

Aryan Dali

*Department of Electronics  
and Telecommunications*

*Sardar Patel Institute of Technology*  
Mumbai, India  
aryan.dali@spit.ac.in

Anand Mane

*Department of Electronics  
and Telecommunications*

*Sardar Patel Institute of Technology*  
Mumbai, India  
anand\_mane@spit.ac.in

Husain Challawala

*Department of Electronics  
and Telecommunications*

*Sardar Patel Institute of Technology*  
Mumbai, India  
husain.challawala@spit.ac.in

Jai Damani

*Department of Electronics  
and Telecommunications*

*Sardar Patel Institute of Technology*  
Mumbai, India  
jai.damani@spit.ac.in

**Abstract**—Providing security and safe access to workplaces has always been a primary concern for corporate and private organizations. Over the years, there have been innovations in the way security is provided, ranging from keypads to fingerprint sensors. However, even these have their lapses and shortcomings. A stronger approach to provide authorized access is to make use of Computer Vision. This project attempts to implement a Security system which makes use of this software and a temperature sensing module to provide a secure, monitored and authorized access. The facial recognition is achieved with a help of a webcam connected with our system and a python program on which this is executed, after which the main control is transferred to the Arduino Microcontroller board which tests the two incoming inputs and provides access based on its decision. A training model is employed which studies the given images of the users and detects them when required.

**Index Terms**—Facial Recognition, Security System, Temperature detection, OpenCV, Computer Vision, Arduino, Computer Vision

## I. INTRODUCTION

In our modern era, physical security risks are at an all-time high. Premises ranging from residential homes to commercial buildings require trustworthy and high standard security to prevent breach and theft. Hence, we have designed a facial recognition security system to grant access only to authorized people. This system is considerably more efficient than a password-based system or a fingerprint system and it also eliminates all the need for any physical contact with the system which is of utmost importance in today's day and age owing to the COVID-19 pandemic. The proposed system is a facial recognition security system with a temperature sensor that will be able to protect people's personal spaces as well as their health. It consists of the following components:

1. A facial recognition system implemented using python's Computer Vision

2. A temperature sensing system with the help of LM- 35 temperature sensor.

3. Arduino Microcontroller which oversees the logic.

### A. Motivation

As security breaches are becoming a rising concern, a foolproof method is required to curb attacks and improve the standard of overall security that a system provides. Traditional means of security that include the use of a keypad or a fingerprint, though effective, can be compromised easily. Such situations require a stronger means of protection, which uses a person's face for recognition and authorization. Systems in smartphones and other devices are already incorporating a facial lock system. Additionally, our recent endemic has brought attention to contactless systems and temperature checks at every entrance. This system has improved scalability and can be extended to other areas too. Our motive is to build a secure system which uses facial recognition and contactless to provide access. This system has greater complexity in implementation but offers a better security solution for private as well as public places.

### B. Literature Survey

The following research papers were studied for the sake of the current project-

- **Digital Thermometer using Atmega 8 microcontroller[1]**

This paper contains information about a regular thermometer and its principles, LM-35 temperature sensor and the Atmega 8 microcontroller. It also tells us how to connect the microcontroller and the sensor to make the digital thermometer

- **Automatic temperature Control System using Arduino[2]**

Using Arduino Uno and LM35 temperature sensor the author creates a control system based on the room temperature

- **Face Detection and Recognition using OpenCV and Python[4]**

This research paper provides an ideal way of detecting and recognizing facial data using OpenCV, and python which is part of deep learning. This report will contain a proposed system which will help in detecting the human face in real time. This implementation can be used at various platforms in several software applications.

### C. Contributions

The primary objectives of the project are as follows-

- To develop a facial recognition security system which is trustworthy and efficient.
- To make a temperature sensing system to determine the temperature and prevent the spread of coronavirus.

### D. Outline

- The paper gives a basic idea about our project, the algorithm and the implementation.
- The idea is to build a face detection security system along with a temperature system.
- We also discuss about Python and OpenCV along with Arduino.
- Lastly, we discuss the results that we obtained.

## II. BODY

### A. Working and algorithm

Designing a Facial Recognition based Security System has several intermittent stages. Our system basically checks the users face for a match thereby sending a signal to the micro-processor (using the binary system of 1s and 0s) to allow or deny the user permission. After this we have used the Arduino microprocessor for receiving the signal from OpenCV [5] and executing the conditional check and displaying the results of our test cases. Arduino can essentially be described as an open-source platform that is used for simulating electronics projects. It consists of an IDE (Integrated Development Environment) that can run on your computer and is used to write and upload computer code to the physical board [8]. For our purpose, we used an online simulation software called Proteus instead of a physical board.

If the signal received is '1' and if the temperature check performed by the LM35 temperature sensor falls under our threshold range, a "Access Granted" prompt would be displayed on the LCD screen attached to our simulation circuit. Conversely, if there isn't a match in the face and the system sends a '0' to our Arduino circuit, then this implies that it's an unregistered person and thus should not be granted access. And thus, an "Access Denied" prompt is generated on the screen. The LM35 is used to sense and display the temperature [3] of the test case. After giving us the temperature, we constructed a conditional statement in our Arduino code which combines the two criteria for allowing access to a user by using an 'if'

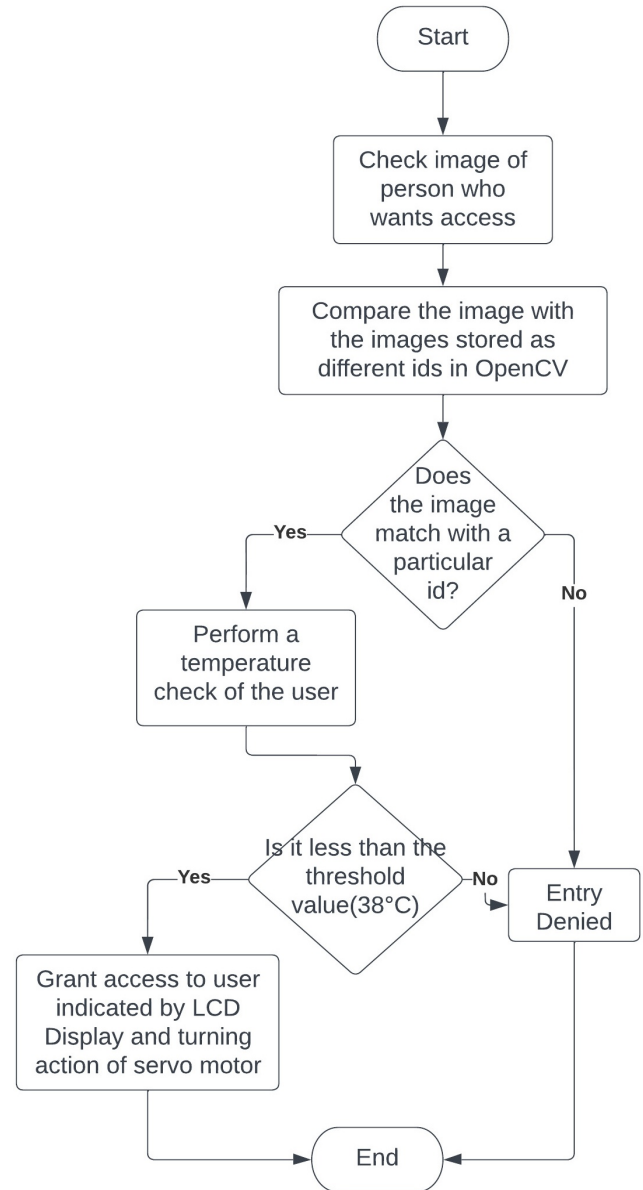


Fig. 1. Flow Chart

statement. This implies that even if the face of the person matches that with our database but the temperature lies above a certain value (which is to say that he or she bear the risk of being COVID positive), access would still not be granted to the person by the message "Temperature is too high" being displayed on the LCD screen.

In this way we established a double security check on our system by integrating a temperature check and a facial recognition check and combining it on our circuit using the set of applications mentioned above.

### B. Simulation

After designing the circuit and employing the necessary software applications, the system is ready for simulation. For testing and debugging, the system is first run entirely

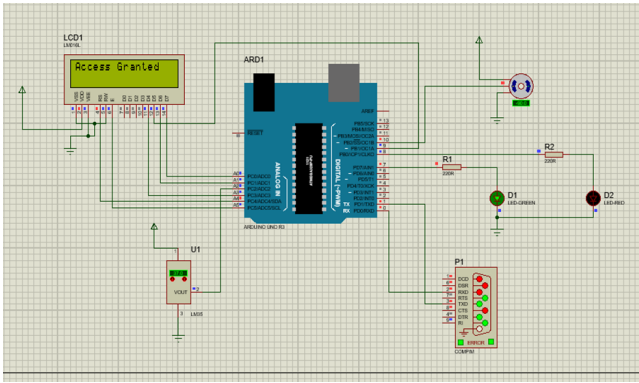


Fig. 2. Case 1: Access Granted

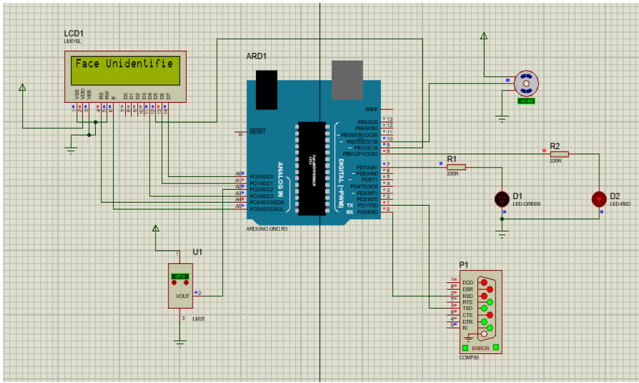


Fig. 3. Case 2: Access Denied since face is unidentified

virtually. The Python script sends the facial recognition data to the Arduino board. Depending on the input received by the temperature sensor, which is adjusted by the user, the Arduino makes the decision of granting or denying access to the current user. Two additional software applications may be required depending on whether the system is being run purely as a simulation or is implemented through hardware. During simulation or system testing, the circuit is built of Proteus Simulation Software. All the necessary components are added to the system and the microcontroller is loaded with the code. Along with this, a Virtual Serial Port Emulator is used. It is a tool to emulate serial ports for the sake of communication [12]. It allows the pairing of the various ports available on the computer. This allows Python and the microcontroller to interact with each other and send data. During hardware implementation, this is achieved by connected the Arduino to a computer manually and selecting the necessary port to send data over. The circuit consists of the microcontroller, LCD Screen, Servo Motor, LM-35 and a few LEDs [11].

The LCD and LEDs are used as visual indicators for granting or denying access. A servo motor is used to emulate the opening and closing of an automatic door to allow entry. It rotates back to its original position within a few seconds.

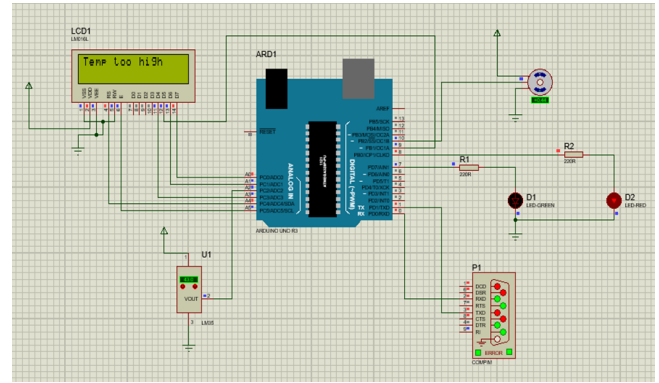


Fig. 4. Case 3: Access Denied since temperature is too high

### C. Methodology

1) *Facial Recognition System:* The facial recognition system was made using OpenCV library installed in python wherein the following steps take place [7].

- Data is gathered and different datasets are made. Each different dataset is given a separate unique id.
- With the gathered dataset the recognizer is trained.
- Now that the recognizer is trained if there is an input of a face to the system then the system will compare it to the dataset.
- If there is a match with any id that has been in the dataset and trained to the recognizer then the face will be recognized.

2) *Temperature Sensing System:* The temperature sensing stem with the help of LM-35 temperature sensor functions in the following steps [9].

- The LM-35 temperature sensor senses the temperature of the user.
- The analog temperature voltage is converted to a digital reading and is sent to the Arduino uno.
- The Arduino compares the temperature to the set threshold temperature (100 F or 38 C).
- If the temperature of the user is less than the threshold temperature only then will it be ok to grant access.

3) *Servo Motor:* The Servo Motor is basically an ordinary motor which simulates an accurate and controlled circular rotation in our system [10]. It is used as mentioned below:

- When we have both our conditions fulfilled, i.e, a match in the facial scan and the body temperature below a certain value, only then will the servo motor be activated and directed to rotate by precisely 90 degrees.
- This rotation is used to simulate the unlocking of the door, hence finally granting access to the user.

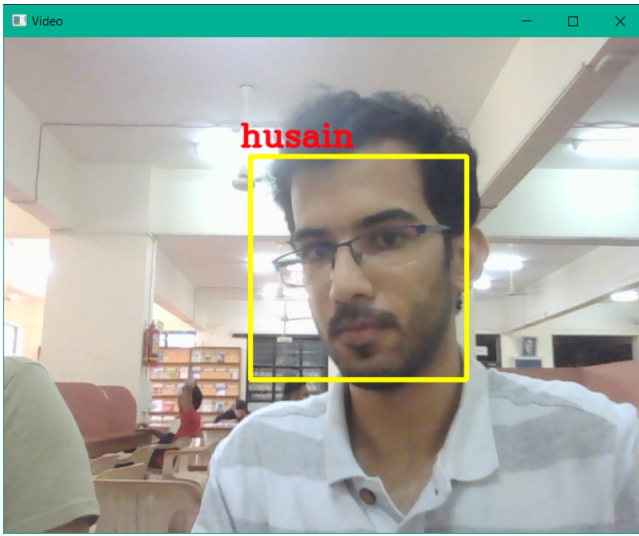


Fig. 5. Case 1: Identified Person 1

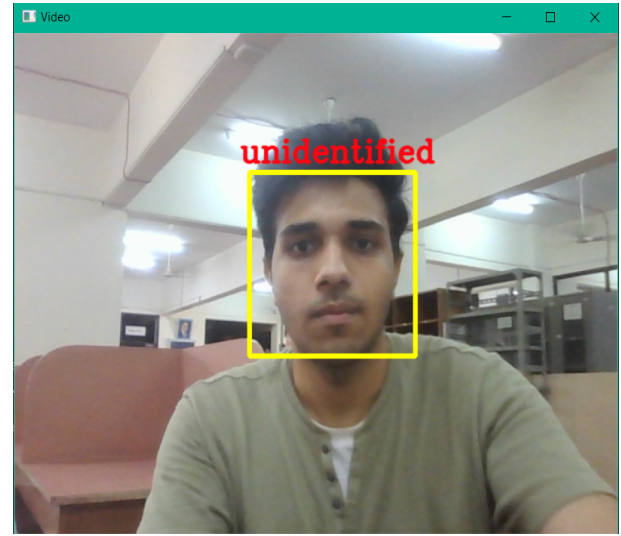


Fig. 7. Case 3: Unidentified Person

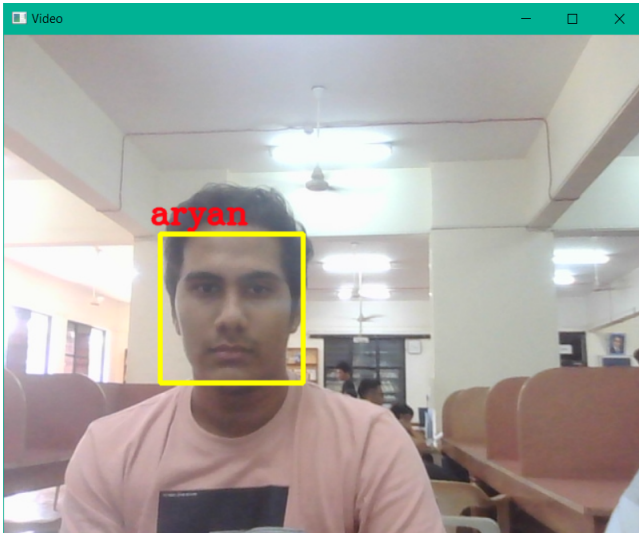


Fig. 6. Case 2: Identified Person 2

### III. RESULTS

Since we used OpenCV, which requires a dataset of images as training models [6], we added 100 images of 3 people to our directory. These were analyzed by the algorithm as a set of coordinates and the images were compared with the faces on the webcam. For test purposes, 2 of the faces were detected since they matched with the data in the directory and one was detected as unidentified, thus posing as a security threat. The values of accuracy are an approximation after running various tests. The loss in accuracy comes primarily from the face recognition system. Its accuracy can be improved by using a camera with better resolution, deploying the system in a well-lit place, and providing a greater set of data to train the model to improve detection.

Accuracy Table

Test	Result	Accuracy
Recognized Face + Body Temperature below 38 C	Access Granted - Face identified and temperature acceptable	85%
Unrecognized Face + Body Temperature below 38 C	Access Denied - Face unidentified	90%
Recognized Face + Body Temperature above 38 C	Access Denied - Temperature too high	99%
Unrecognized Face + Body Temperature above 38 C	Access Denied - Face unidentified and temperature too high	99%

### IV. CONCLUSION AND FUTURE SCOPE

We have thus successfully simulated a Facial Recognition based Security System integrated with an LM-35 Temperature Sensor. The primary objective of this project was to provide a security system that eliminated the use of passwords (which may be forgotten and are relatively unsafe and can also be compromised) and fingerprints that can act as a means to spread diseases which is highly unsuitable given the current COVID-19 pandemic situation. The facial recognition system proposed is much more accurate as compared to a fingerprint-based system and since it is combined with a temperature sensor it provides an additional check for body temperature which is now a mandatory security parameter in malls and offices worldwide. It also provides for a cost-effective and user-friendly design. We have used several platforms for our project that perform

their specific tasks. Primarily we used a python-based image processing system called OpenCV that uses a webcam to detect the face of a person and identify whether or not the face matches with a set of images provided and stored in its database.

Next, we took the help of Arduino to implement our conditional checks of the facial and temperature criteria and display the result accordingly. After this, we used a simulation software called Proteus which had our entire circuit board and was meant for displaying our final output using a digital display.

The future scope for this project would be to implement the system using physical components and to integrate it with voice recognition-based software to increase the level of security as well as the complexity to reduce external attacks.

## REFERENCES

- [1] Saghaei, Hamed. (2012). Digital thermometer using LM35 and AVR Microcontroller. 10.13140/RG.2.2.16626.71368.
- [2] Raju, Srujan & Sinha, Professor G. (2020). Automatic Temperature Control System Using Arduino. *Advances in Intelligent Systems and Computing*. 1090. 219-226. 10.1007/978-981-15-1480-7\_18.
- [3] A Arefin, Utsho & Roy, Vaskar & Sagar, Md. (2013). Digital Thermometer using ATmega8 Microcontroller. 10.13140/2.1.3551.7763.
- [4] Face Detection in Real Time Based on HOG. N. J. Wang, S. C. Chang and P. J. Chou. Taipei, Taiwan: IEEE, DOI:10.1109/ISPACS.2012.6473506, 2012. *International Symposium on Intelligent Signal Processing and Communications Systems*. pp. 333-337. ISBN: 978-1-4673- 5081-5.
- [5] Face Detection and Tracking using OpenCV. S.V.Viraktamath, Mukund Katti, Aditya Khatawkar, Pavan Kulkarni. 3, s.l.: SIJ, July-August 2013, *The Standard International Journals (The SIJ)* , Vol. 1, pp. 45-50. ISSN: 2321 – 2403
- [6] Tejashree Dhawle, Urvashi Ukey & Rakshandha Choudante. Face Detection and Recognition using OpenCV and Python. *International Research Journal of Engineering and Technology (IRJET)*, Volume: 07 Issue: 10 — Oct 2020
- [7] Mahamkali, Naveenkumar & Ayyasamy, Vadivel. (2015). OpenCV for Computer Vision Applications.
- [8] Louis, Leo. (2018). Working Principle of Arduino and Using it as a Tool for Study and Research. *International Journal of Control, Automation, Communication and Systems*. 1. 10.5121/ijcacs.2016.1203.
- [9] Admin, “Temperature measurement using LM35 and AVR microcontroller,” MaxPhi, 16-Sep-2017. [Online]. Available: <https://www.maxphi.com/temperature-measurement-using-lm35-and-avr-microcontroller>. [Accessed: 02-Apr-2022].
- [10] Admin, “Temperature measurement using LM35 and AVR microcontroller,” MaxPhi, 16-Sep-2017. [Online]. Available: <https://www.maxphi.com/temperature-measurement-using-lm35-and-avr-microcontroller>. [Accessed: 02-Apr-2022]. “Servo Motor SG-90,” Components101. [Online]. Available: <https://components101.com/motors/servo-motor-basics-pinout-datasheet>. [Accessed: 02-Apr-2022].
- [11] “16x2 LCD display module,” Circuit Digest, 17-Jul-2018. [Online]. Available: <https://circuitdigest.com/article/16x2-lcd-display-module-pinout-datasheet>. [Accessed: 02-Apr-2022].
- [12] “DB9 changer datasheet PDF,” DB9 Datasheet — ETC - Datasheetspdf.com. [Online]. Available: <https://datasheetspdf.com/datasheet/DB9.html>. [Accessed: 02-Apr-2022].