www.graintecindustries.com



GRAINTEC INDUSTRIES

An ISO 9001 : 2015 Certified Company

Grain Processing Machinary and Accessories

we count every grain...







DRUM SIEVE



- The Drum Sieve is to do a preliminary of the cereal grains. The double Drum Sieves of the machine separates Coarse impurities and Finer impurities.
  Motor : 2HP
  Capacity : 4TPH to 15TPH
- Attached with Nylon Brushes at outer drum for self cleaning

PRE- CLEANER

MODELS :

PCLR - 800/1500-1D /1500-2D



- The Pre-Cleaner is first and foremost Machine designed for Coarse Cleaning of grains
- In standard construction, the Pre-Cleaner machines are delivered with the following features
- The machine is fitted with inlet Blower
- The machines is of steel construction with sieve boat of laminated wood

CLASSIFIER



Graintec Classifier fine cleaning machine can separate the oversize and under size impurities from the grains. Classifier can also used to Grade different sizes of grains.

FEATURES

The inbuilt cleaning system provide
High efficiency of production

1. Easy sieve removing
2. Easy inspection covers
3. Imported high performance Vibro motors

SPECIFICATION CHART

Machine Type	Capacity TPH	VIB - Power HP	Voltage / Frequency(HZ)	Overall Size - LxWxH (mm)
GCLA-60/120	1 - 2 Ton	0.5 HP	415 / 50	2659 x 1482 x 1674
GCLA-100/200	3 - 6 Ton	1 / 1.5 HP	415 / 50	2632 x 1502 x 1662
GCLA-150/200	8 Ton	2 HP	415 / 50	2659 x 1998 x 1729



DE-STONER

Graintec De-Stoner removes stones, mud, dust and other impurities etc.
This machine performs on the basis of density difference by adjusting the aspiration.


FEATURES

Low maintenance, precision separation of stones.

1. Compact design closed dust aspiration system.
2. Imported Vibro Motors for trouble free, long life and low maintenance.
3. Rigid and heavy duty Construction.

SPECIFICATION CHART

Machine Type	Capacity TPH	VIB - Power HP	Voltage / Frequency(HZ)	Overall Size - LxWxH (mm)
GDSA - 65/120	1 - 2 Ton	0.5 HP	415 / 50	1622 x 1511 x 1803
GDSA - 120/120	3 - 6 Ton	1 HP	415 / 50	1564 x 2176 x 2297
GDSA - 180/120	8 Ton	2 HP	415 / 50	1727 x 1722 x 1974

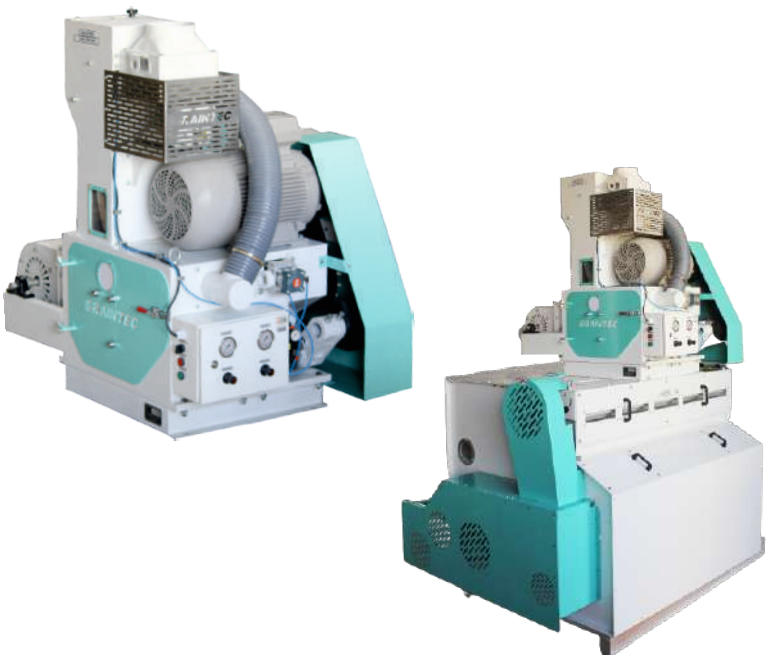

PNEUMATIC VIBRO SHELLER WITH HUSKER

PNEUMATIC VIBRO SHELLER

Graintec Rubber Sheller is completely automatic system ensures correct feed rate and pressure between rubber rolls which reduce the rubber roll consumption and less percentage off brokens

High efficient de husking for Boiled, Raw, Steam & Basmati Rice

FEATURES

1. FEEDER

It is Equipped with a feeder volume control which can vary the flow rate in a continuous linear manner.

2. CHUTE

The new chute is designed to automatically controlled in the best orientation. It maintain the paddy on the chute in a uniform and consistent feed.

SPECIFICATION CHART

Machine Type	Capacity TPH	Power HP	Voltage / Frequency(HZ)	Overall Size - LxWxH (mm)
PSVA	1 - 3 Ton	5 / 7.5 / 10 HP	415 / 50	1371 x 881 x 1369
PSVA	4 - 6 Ton	10 / 15 HP	415 / 50	1394 x 940 x 1384
PSVA	8 Ton	15 HP	415 / 50	1555 x 998 x 1485



HUSK ASPIRATOR

Husk aspirator is used aspirate husk / light particles from paddy.

FEATURES

1. In-built fan for husk separation
2. accurate separation
3. Low maintenance

SPECIFICATION CHART

Machine Type	Capacity TPH	Power HP	Husk Pumping Distance
HSUA	1 - 4 Ton	3 / 5 HP	150 Feet



HUSK ASPIRATOR (HUSSE)

The machine is equipped with dynamically balanced blower. The husk conveyed through the ventury pipe line to husk yard with the support of blower forced air.

SPECIFICATION CHART

Machine Type	Capacity TPH	Power HP	Overall Size - LxWxH (mm)
DHSH	6 - 8 Ton	5 HP	2125 x 1580 x 1325



PADDY SEPARATOR

The machine is designed for seperation of paddy from the mixture of brown rice and paddy on the principle of density.

FEATURES

1. Tray type.
2. Separations of three distinct classifications
   Paddy, brown rice and mixture.

SPECIFICATION CHART

Machine Type	Capacity TPH	Power HP	Overall Size - LxWxH (mm)
TSAT-Q	1 Ton	2 HP	1290 x 1678 x 2153
TSAT-S	2 - 3 Ton	3 HP	1987 x 1678 x 2153
TSAT-M	4 Ton	3 HP	1987 x 1678 x 2153
TSAT-L	6 - 8 Ton	3 HP	2650x 1800x 2200

WHITENER





Rice whitener is used for whitening brown rice. It uses vertical abrasive grinding wheel that follows the top to bottom working principle.

A specially designed aspiration system takes away the bran produced during whitening process.

This vertical rice whitening machine is equipped with a mechanism for adjusting degree of whiteness

The accurate and precise assembly techniques ensures lowest broken content.

WHITENER FEATURES

1. Equally milling higher yield rice with less percentage of brokens
2. It can handle Raw, Steam and Parboiled rice.
3. Ensures whiteness on all grains.
4. Heavy duty construction.
5. Low Maintenance cost.

SPECIFICATION CHART

Machine Type	Capacity TPH	Power HP	Voltage Frequency	Overall Size - LxWxH (mm)
RWPL-1T	1 Ton	15 HP	415 / 50	1350 x 580 x 1450
RWPL-3T	2 - 3Ton	20 / 30 HP	415 / 50	1450 x 700 x 1430
RWPL-4T	4 Ton	40 HP	415 / 50	1650 x 750 x 1750
RWPL-6T	6 Ton	50HP	415 / 50	1800 x 800 x 1800
RWPL-8T	8 Ton	60 HP	415 / 50	1800 x 800 x 1800



SILKY POLISHER

Graintec Silky Polisher machine is used for polishing rice surface by injecting water through mixing chamber and by creating friction among rice grains using milling rollers.

The weight controlled outlet of the silky polisher controls the retaining time of kernels inside the milling chamber. The water Jet Silky polisher produces rice grains with a shiny surface finish.



FEATURES

1. This Silky Polisher machine designed with water dosing mechanism.
2. Specially designed milling rollers for higher glazing.
3. Easy for cleaning and low maintenance cost.
4. Water & air mist nozzle at shaft.

SPECIFICATION CHART

Machine Type	Capacity TPH	Power HP	Voltage Frequency	Overall Size - LxWxH (mm)
RWFP-1	1 - 2 Ton	20/25HP	415 / 50	1300 x 600 x 1550
RWFP-4	3 - 6 Ton	40/50/60HP	415 / 50	1800 x 650 x 1575
RWFP-8	8 Ton	75 HP	415 / 50	2100 x 800 x 1775

THICK AND THIN GRADER





Thick and Thin Grader is used to separate different thickness grains in brown rice and polished rice.

The material is passed through revolving cylindrical screens, for separating over or undersized grains.

Highly efficient for separating admixture of over size or under size grains

This can also be used to separate immature grains, broken etc.

SPECIFICATION CHART

Machine Type	Capacity TPH	Power HP	Voltage Frequency	Overall Size - LxWxH (mm)
TGRD-S	3 - 4 Ton	1 HP	415 / 50	2193 x 875 x 1705
TGRD-M	5 - 6 Ton	2 HP	415 / 50	2193 x 875 x 2306
TGRD-L	8 Ton	2 HP	415 / 50	2193 x 875 x 2890

LENGTH GRADER





Graintec Length Grader has indented cylinder screen type it separates broken or shorter grain from whole grain by length. This machine efficiently separate broken rice and head rice from raw rice, steam rice, parboiled rice and basmati rice.

FEATURES

1. Modular construction of cylinders one above the other to save space.
2. Easy maintenance and minimum operating cost.
3. Inbuilt Self-Cleaning mechanism to ensure optimum separation.

SPECIFICATION CHART

Machine Type	Capacity TPH	Power HP	Voltage Frequency	Overall Size - LxWxH (mm)
LGRD-S	1 Ton	1 HP	415 / 50	700 x 3080 (1 Nos
LGRD-M	2 - 4 Ton	2 HP	415 / 50	700 x 2580 (2 Nos)

PLAN SHIFTER (RICE MULTI GRADER)



FEATURES

This is a unique and elegant model available in different sizes. This works on the principle of rotary. The main frame is built heavily and the screen frame is also elegantly designed. The rice is made to run over a long length for better separation of broken rice from head rice. The wooden frames are fitted with screens and bouncing balls. The screen clogged will be cleaned to maximum with the movement of bouncing balls. This is called self cleaning mechanism. The screens can be easily taken out for cleaning in case of heavy clogging. This machine is attached to an aspirator and cyclone for removal of small bran particles.

SPECIFICATION CHART

Machine Type	Size	Capacity TPH	Power HP	Voltage Frequency
MGRS	100 x 4	1 - 2 Ton	2 HP	41 5 / 50
MGRS-L	125 x 5	3 - 4 Ton	2 HP	415 / 50
MGRS-B	150 x 5	6 - 8 Ton	3 HP	415 / 50

Turnkey Projects









GRAINTEC INDUSTRIES

Sy No. 101, Kachohalli, Lakshmipura Post,
Dasanapura Hobli, Bengaluru - 560091.
Ph : 080 29776848, 29775848
Mob : 9845436848 / 9845261452 / 8792493844 / 6366838414
8147696183 / 8147696185 / 8494895100
E-mail : info@graintecindustries.com | graintecindustries@yahoo.com | sales@graintecindustries.com
www.graintecindustries.com

