GRAINTEC
INDUSTRIES

VIBRO DE-STONER-GDSA



GRAINTEC Vibro-Destoner precisely removes stones and other foreign impurities from the input product on the basis of their difference of densities controlled by fluid motion.

The machine function effectively when the product is already pre-cleaned Applicable for cleaning paddy, grains, pulses and seeds etc.


VIBRO DE-STONER- GDSA

Key Features:

- Excellent separation of high-density particles such as stones, pebbles, glass and metals.
- Built with closed circuit dust aspiration system that sucks dust and immature grains.
- Machine inclination, air volume and vibration force can be easily adjusted.
- Vibro motors are low noise, high life and maintenance free.
- Sturdy, rigid & heavy-duty construction.

Key Benefits:

- Lighting system for viewing purpose.
- Fitted with SS beading plates at glass door.
- Self-cleaning system for optimum operating efficiency.

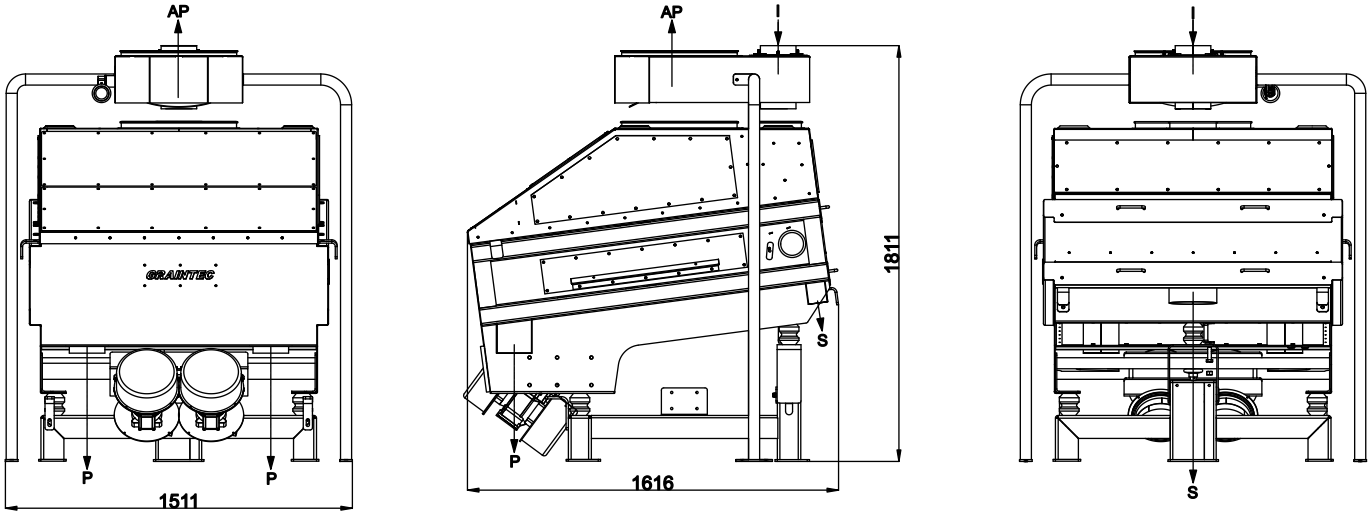

NOTE:

I - PRODUCT INLET
P - PRODUCT OUTLET
S - STONES OUTLET
AP - ASPIRATION

TECHNICAL SPECIFICATIONS				
MACHINE TYPE		**GDSA 65/120-1D**	**GDSA 65/120-2D**	**GDSA 120/120-2D**
VIBRO MOTOR - HP / kW		0.5 / 0.35 - 1 NO	0.5 / 0.35 - 1 NO	0.5 / 0.35 - 2 NOS
VIBRO MOTOR SPEED - POLE / RPM		6 / 1000	6 / 1000	6 / 1000
WEIGHT (KG)		270	350	530
SIZE (mm)	**A**	1569	1603	1616
	B	911	911	1511
	C	1558	1804	1811

All Graintec products are subject to continuous development and as a result, their specification may change and differ from the above mentioned.

Graintec Industries

Survey no. 101, Kachohalli, Lakshmipura Post, Dasanapura Hobli,
Bengaluru - 560 091, Karnataka, India.

Ph: 080-2977 5848 / 6848
Mob: +91 - 84948 95100

www.graintecindustries.com

GRAINTEC INDUSTRIES
ISO 9001 : 2015