EX.NO: 11
1/10/2024

SIMULATION OF RIP USING CISCO PACKET TRACER

AIM:
To Simulate Routing Information, Protocol (RIP) using Cisco packet tracer and observe dynamic routing between different networks

IP CONFIGURATION:


DEVICE	INTERFACE	IP CONFIGURATION
PC0	Fast ethernet	10.0.0.2/8
Router 0	Fa 0/1	10.0.0.1/8
Router 0	S0/0/1	192.168.1.254/20
Router 0	S0/0/0	192.168.1.249/30
Router 1	S0/0/0	192.168.1.250/30
Router 1	S0/0/1	192.168.1.246/30
Router 2	S0/0/0	192.168.1.245/30
Router 2	S0/0/1	192.168.1.253/30
Router 2	Fa0/1	20.0.0.1/30
PC1	Fast Ethernet	20.0.0.2/30


PROCEDURE:


* Create the topology with 3 network and 2 PCs
* Connect the routers using serial cables and Connect PCs to the respective routers
* Assign IP Address to all PCs and router Interface
* Enable the router Interface
* Configure the remaining interface according the given IP table
* from PC0, use ping 20.0.0.2 to verify connecti

* Use pcaps to observe the route taken by Packets.

* Disconnect the direct Router 0 - Router 2 link and observe the RIP reroutes the traffic through Router 1.

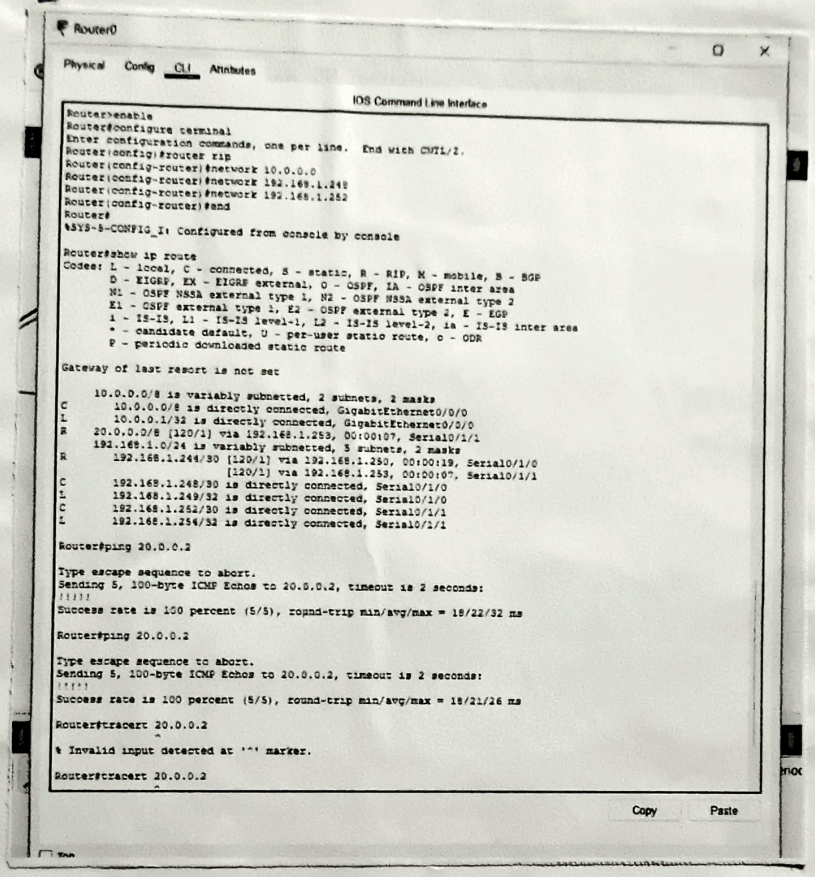

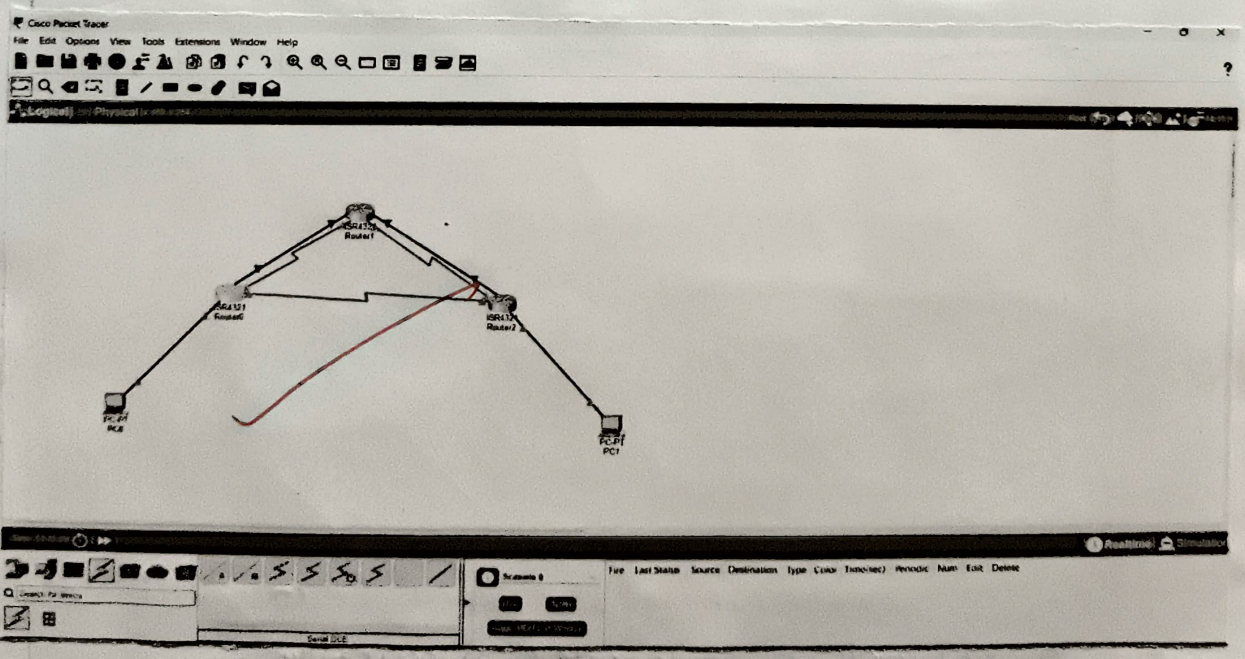

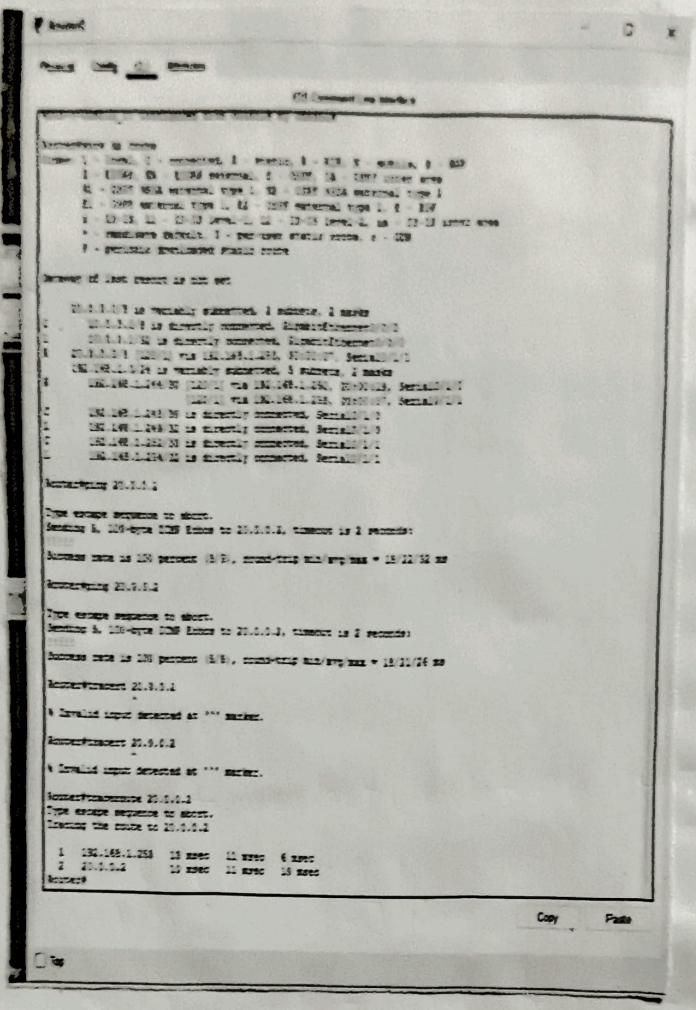

RESULT:

Simulation of RIP using Cisco packet tracer for a network is implemented Successfully.