Ex: NO: 09
DATE: 28/09/26


IMPLEMENTATION OF SUBNETTING IN CISCO PACKET TRACER SIMULATOR


AIM:

To Implement the subnetting in cisco packet Tracer Simulation:

PROCEDURE:

* Open Cisco Packet tracer and create a new network topology
* Add the required routes, switches, and pcs to the workspace
* Connect the device using appropriate upper cables
* Use the network 192.168.1.0/24 and divide it into 4 27 networks
* Configure the router interface with the required IP address and subnet mask 255.255.255.224.
* Use enable and Configure terminal in the router CLI.
* Enter the interface Configuration terminal in the assign the IP using:
  i) IP address <IP address> 255.255.255.224
  ii) No shutdown.
* Configure the required switch ports in access mode
* Assign each PC its IP address, subnet mask and default gateway.
* Repeat the Configuration for all required subnets.
* Use the ping command to test connectivity b/w PCs and the router
* If the ping is successful the network is Configured correctly

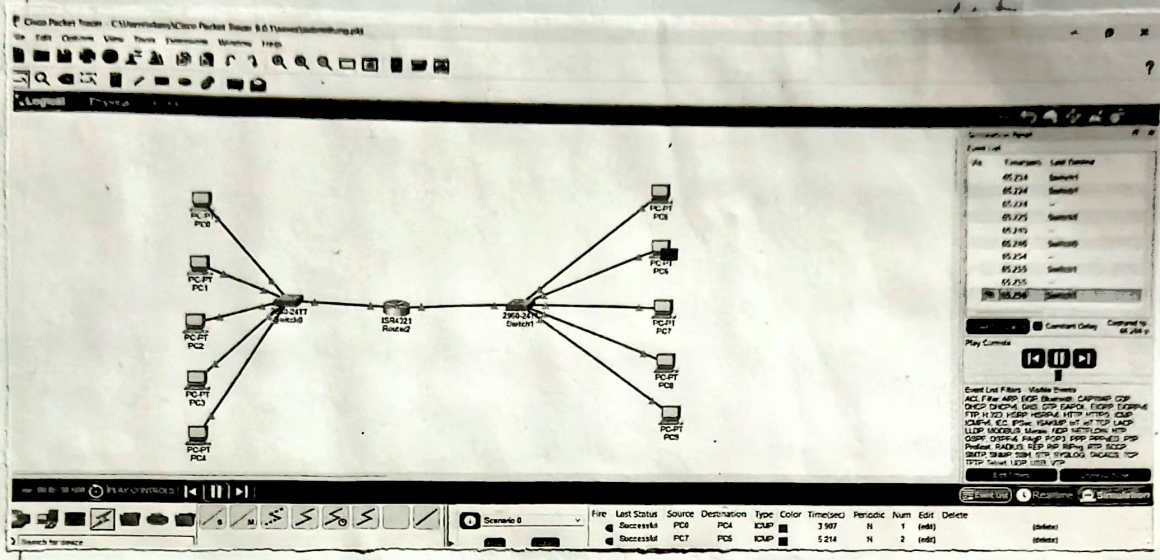

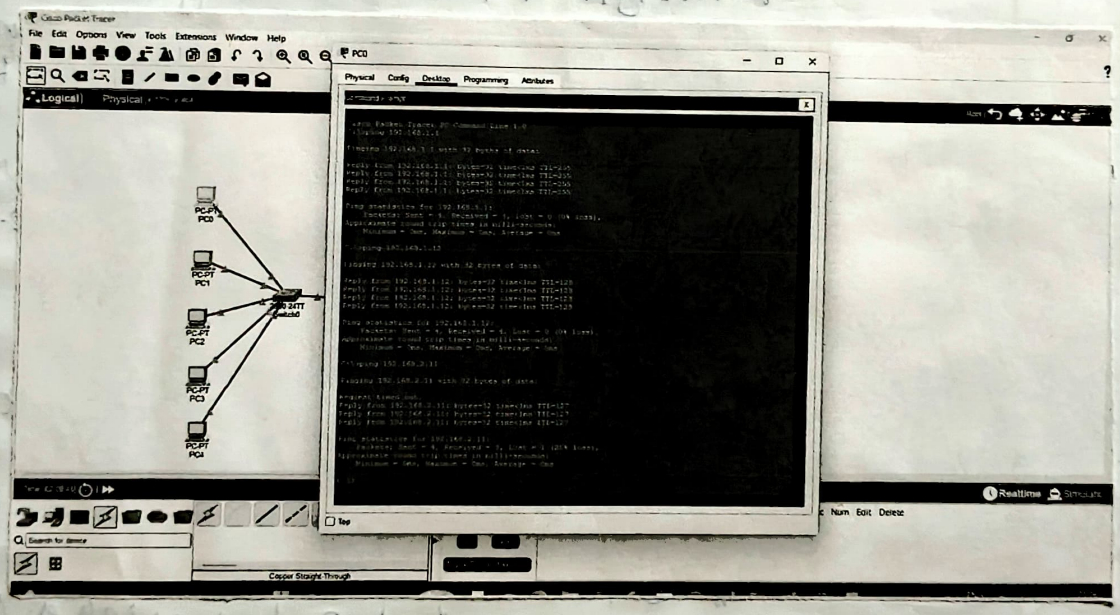

Result:

This Successfully implemented Subwiting cotthis a network and verified by network functioning.