GRAVIX ELECTRICALS



PRODUCT CATALOGUE

WELCOME TO GRAVIX ELECTRICALS

Gravix Electricals - Precision Manufacturing. Quality Engineering. Global Reach

Gravix Electricals is an Indian manufacturer of high-quality electrical connectors and grounding solutions, with its manufacturing facility strategically located in Rajkot, Gujarat, India. With a strong commitment to engineering excellence, precision manufacturing, and consistent product quality, we cater to the evolving requirements of the electrical power distribution, utility, infrastructure, and industrial sectors.



Our comprehensive product portfolio comprises Hotline Clamps, Bronze Vise Connectors, Transformer Tank Grounding Connectors, Jaw Clamps, VT Clamps, Railway Overhead Suspension Clamps, U-Bolt Clamps, and Earth Rod Clamps. We specialize in using high-grade bronze, copper alloys, and aluminium products, and offer fully customizable solutions tailored to application-specific requirements. Each product is engineered to deliver reliable electrical connections, high conductivity, mechanical strength, corrosion resistance, and long-term performance across diverse operating environments.

Backed by our manufacturing capabilities in Rajkot, a prominent industrial and engineering hub of India, we strive to combine technical expertise, efficient production processes, and customer-centric solutions to deliver products that meet demanding industry standards.
Manufactured in India. Engineered for the World.
At Gravix Electricals, our vision extends beyond geographical boundaries. We are equipped and committed to serving customers across global markets, providing Indian-manufactured electrical connection solutions to distributors, utility companies, OEMs, and industrial buyers worldwide.

Through uncompromising quality, dependable manufacturing, competitive capabilities, and a long-term partnership approach, Gravix Electricals aims to establish itself as a trusted global supply partner in the electrical connectors and grounding solutions industry.

INDEX


Hotline Clamps	1
Bronze Vise Connectors	2
Transformer Tank Grounding Connectors	3
Ground Rod Clamps	4
U Bolt Pipe/Rod Clamps	5
Aluminium/Bronze Suspension Clamp Body	6
Two Bolt Parallel Goove/ VT Clamps	7
Universal 1-Bolt Comb Lug / Jaw Clamp	8
Contact Us	9

HOTLINE CLAMPS

Hot line clamps are used for line tap distribution connections. The body is made from high strength bronze alloys such as c955/c956 which offer high strength, corrosion resistance, and conductor compatibility. Now a days we are also manufacturing body from aluminium material like A356 T6.



Eyebolts are made from forged stainless steel. Eyelets and keepers are made from aluminium bronze. /aluminium.

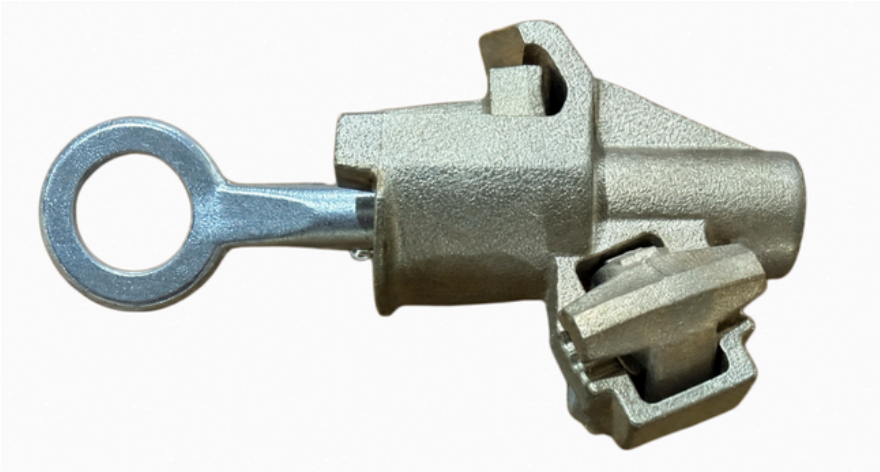

MATERIAL: Copper Alloy, Aluminium
HARDWARE: Stainless Steel
PLATING: Natural, Tin Plated
P: Platting
A: Aluminum

Item No.	Connection Type		Main Line Range Dia. (inch)	Main Line Range Size (MCM/AVG)	Tap Line Range Dia. (inch)	Tap Line Range Size (MCM/AVG)
	Run	Tap				
C1520	CU	CU	0.128" - 0.414"	#8 sol – 2/0 str	0.128" - 0.414"	#8 sol – 2/0 str
C1520P	CU	CU	0.128" - 0.414"	#8 sol – 2/0 str	0.128" - 0.414"	#8 sol – 2/0 str
C1520A	AL	AL	0.128" - 0.414"	#8 sol – 2/0 str	0.128" - 0.414"	#8 sol – 2/0 str
C1520AP	AL	AL	0.128" - 0.414"	#8 sol – 2/0 str	0.128" - 0.414"	#8 sol – 2/0 str
C1530	CU	CU	0.162" - 0.745"	#6 sol – 400 MCM	0.152" - 0.682"	#6 sol – 4/0 str
C1530P	CU	CU	0.162" - 0.745"	#6 sol – 400 MCM	0.152" - 0.682"	#6 sol – 4/0 str
C1530A	AL	AL	0.162" - 0.745"	#6 ACSR – 336.4 MCM	0.152" - 0.682"	#6 sol – 4/0 str
C1530AP	AL	AL	0.162" - 0.745"	#6 ACSR – 336.4 MCM	0.152" - 0.682"	#6 sol – 4/0 str

BRONZE VISE CONNECTORS (TYPE 1)




Vise connectors are used for grounding splice or tap connection in telecom, utility, and residential applications.

Used for copper connections- splice, loop dead-end or service entrance tap.

One piece design for easier, faster installation

Bolt head design for use with standard ratchet wrench

MATERIAL BODY: Copper Alloy
HARDWARE: Stainless Steel

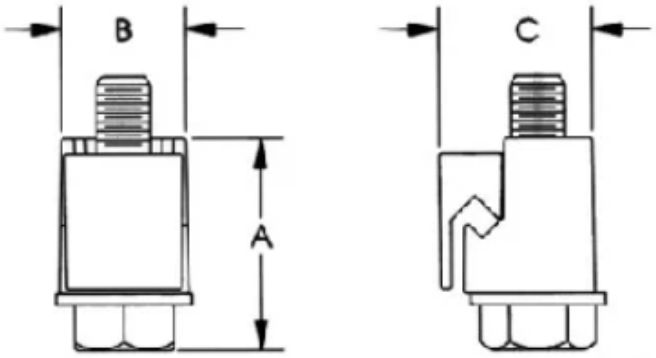

Item No.	Conductor Diameter Range	Bolt Thread Size	Bolt Hex Size	A	B	C
BVC-2	6 sol – 2 sol	5/16"	9/16"	1.33	0.81	0.93
BVC-20	4 sol- 1/0 str	5/16"	9/16"	1.72	0.80	1.03
BVC-20S	3 sol – 2/0 str	3/8"	9/16"	1.91	0.94	1.19
BVC-2S	5 sol – 2 str	5/16"	9/16"	1.52	0.79	0.93
BVC-40	1/0 sol – 4/0 str	3/8"	9/16"	2.14	0.95	1.27

TRANSFORMER TANK GROUNDING CONNECTORS

Transformer grounding connectors are cast of high-conductivity bronze; 1/2 in.–13 stud fits all standard EEI-NEMA distribution transformers

Rotating eye bolt accommodates cable either vertically or horizontally

One size connector to handle full range of grounding conductors


MATERIAL: Copper Alloy
HARDWARE: Stainless Steel









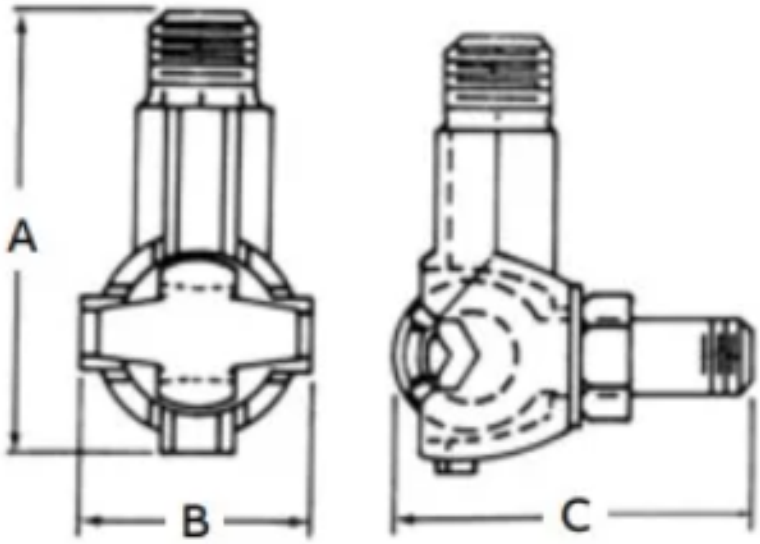

Customisable sizes based on demands

GROUND ROD CLAMPS

Ground rod clamps are used for connecting grounding conductors to copper-clad steel or galvanized steel ground rods in electrical, utility, and telecommunications grounding systems.

Designed for secure, high-pressure connection between the ground rod and cable, ensuring a reliable, low-resistance path to earth.

High-strength body design provides excellent corrosion resistance and superior electrical conductivity.

MATERIAL BODY: High-Strength Copper Alloy / Bronze / Brass
HARDWARE: Stainless Steel / Silicon Bronze Bolts



Customisable sizes based on demands

U BOLT PIPE/ROD CLAMPS

U-bolt pipe and rod clamps are used for connecting grounding conductors, cables, or tapes to ground rods, water pipes, structural steel, and rebar in electrical, utility, and telecommunications grounding grids.
Designed with a high-pressure U-bolt and a grooved clamping saddle/spacer, ensuring maximum surface contact, correct cable alignment, and a secure, low-resistance path to earth.

Heavy-duty body construction provides exceptional mechanical strength, pull-out resistance, and superior corrosion resistance in direct burial and harsh environmental conditions.

MATERIAL BODY: High-Strength Copper Alloy / Bronze / Brass

HARDWARE: Stainless Steel / Silicon Bronze U-Bolts and Nuts



Customisable sizes based on demands

ALUMINUM-BRONZE SUSPENSION CLAMP BODY

Aluminum-bronze suspension clamp bodies (Railway Identification Code 1161) are used in Indian Railways overhead equipment (OHE) cantilever assemblies to securely hold and support the catenary wire.

Designed for high mechanical strength and superior fatigue resistance to withstand continuous dynamic wind loads, weather stresses, and train passage vibrations.
Precision-cast from high-strength aluminum-bronze alloys, offering excellent corrosion resistance, anti-wear properties, and long-term durability in harsh outdoor railway environments.

MATERIAL BODY: High-Strength Aluminum-Bronze Alloy
HARDWARE: Stainless Steel / Hot-Dip Galvanized Steel Bolts and Nuts




Customisable sizes based on demands

TWO-BOLT PARALLEL GROOVE / VT CLAMP

wo-bolt parallel groove and mechanical service tap connectors are used for parallel tapping, splicing, and joining copper or aluminum conductors in electrical distribution, substation, and utility applications.

Designed with a robust dual-bolt clamping configuration to ensure uniform, high-pressure contact across parallel running conductors, minimizing electrical resistance and preventing conductor slip under heavy thermal and mechanical loads.
Heavy-duty body construction provides exceptional clamping force, structural stability, and superior corrosion resistance for demanding outdoor and underground electrical grids.

MATERIAL BODY: High-Strength Copper Alloy / Aluminum Alloy
HARDWARE: Stainless Steel / Galvanized Steel Bolts and Nuts

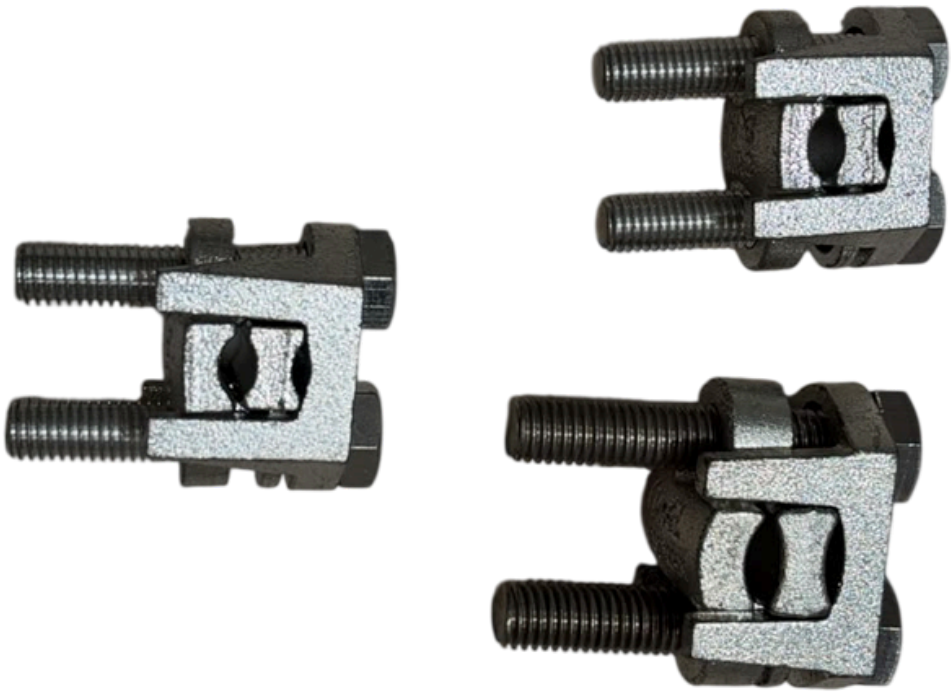

Customisable sizes based on demands

UNIVERSAL 1-BOLT COMB LUG / JAW CLAMP

Universal 1-bolt comb lugs and brass conductor/jumper clamps are used for connecting grounding cables, jumpers, or equipment leads to flat busbars, transformer pads, structural steel, and grounding grids.

Designed with a comb-style grooved clamping member and a single high-strength tightening bolt to ensure secure, uniform pressure and a reliable, low-resistance electrical connection.

Heavy-duty cast construction provides excellent mechanical rigidity, pull-out resistance, and superior corrosion resistance for demanding electrical, substation, and industrial environments.

MATERIAL BODY: High-Strength Copper Alloy / Brass
HARDWARE: Stainless Steel / Silicon Bronze Bolts and Nuts



Customisable sizes based on demands

CONTACT US

E-Mail

jaival@gravixelectricals.in

Website

gravixelectricals.in

Number

+91 8169198273 (Jaival Katira)

Location

India Factory:

Balaji industrial area, plot No .1 to 3, Kalawad Road, village Chhapra, Taluka Lodhika. District Rajkot PIN code-360021 India.

Contact Number: +91 8160071574 (Director: Riya Hudda)

USA Warehouse:

1750 Briercroft CT, Suite 116 Carrollton, Texas - 75006

Contact Number: +16308906427(Mr. Herry)