

CapSense_CSD_P4 Slider Design example project

1.20

Features

- Sensing elements: 5-segment Linear Slider:
 - CY8CKIT-042 and CY8CKIT-042-BLE uses linear slider on board;
 - CY8CKIT-040 uses 5-rows of Trackpad on Trackpad Shield;
- Visual indication of Slider touch position with Tri-color LED

General Description

This example project demonstrates the CapSense CSD component configured with Linear Slider. The HUE of the Tri-color LED displays the scanning results of Linear Slider.

Development kit configuration

The project requires configuration settings changes in order to run on the KIT, different from CY8CKIT-042.

A full description of the supported development KITs, along with more example programs and ordering information, can be found at the following links:

- CY8CKIT-042 - <http://www.cypress.com/go/cy8ckit-042>
- CY8CKIT-040 - <http://www.cypress.com/go/cy8ckit-040>
- CY8CKIT-042-BLE - <http://www.cypress.com/go/cy8ckit-042-ble>

In order to switch from the CY8CKIT-042 to the CY8CKIT-040/CY8CKIT-042-BLE KITs the following steps should be performed:

1. Select the appropriate device with a Device Selector called from the project's context menu:
 - CY8C4245AXI-483 for CY8CKIT-042 KIT
 - CY8C4014LQI-422 for CY8CKIT-040 KIT
 - CY8C4247LQI-BL483 for CY8CKIT-042-BLE
2. In the case of migration to the CY8CKIT-040 KIT, the LED_2 pin should be removed from the project schematic. Double click on the LED_2, select Built-in tab, set CY_REMOVE parameter to True.
3. Change assignment of the pin components to physical pins. In the Workspace Explorer window, double-click the project's design-wide resource file and assign the pins for CapSense_CSD and RGB LED according to Table 1.

Table 1. Pin assignment for the CapSense_CSD_P4_Design project

Pin Name	Development Kit		
	CY8CKIT-042	CY8CKIT-042-BLE	CY8CKIT-040
\Capsense_CSD:Cmod\	P4[2]	P4[0]	P0[4]
\Capsense_CSD:Sns[0]\	P1[1]	P2[1]	P1[4]
\Capsense_CSD:Sns[1]\	P1[2]	P2[2]	P1[5]
\Capsense_CSD:Sns[2]\	P1[3]	P2[3]	P1[6]
\Capsense_CSD:Sns[3]\	P1[4]	P2[4]	P1[0]
\Capsense_CSD:Sns[4]\	P1[5]	P2[5]	P1[7]
LED_1	P0[2]	P3[6]	P1[1]
LED_2	P0[3]	P3[7]	-

Project configuration

The top design schematic is shown in **Figure 1**.

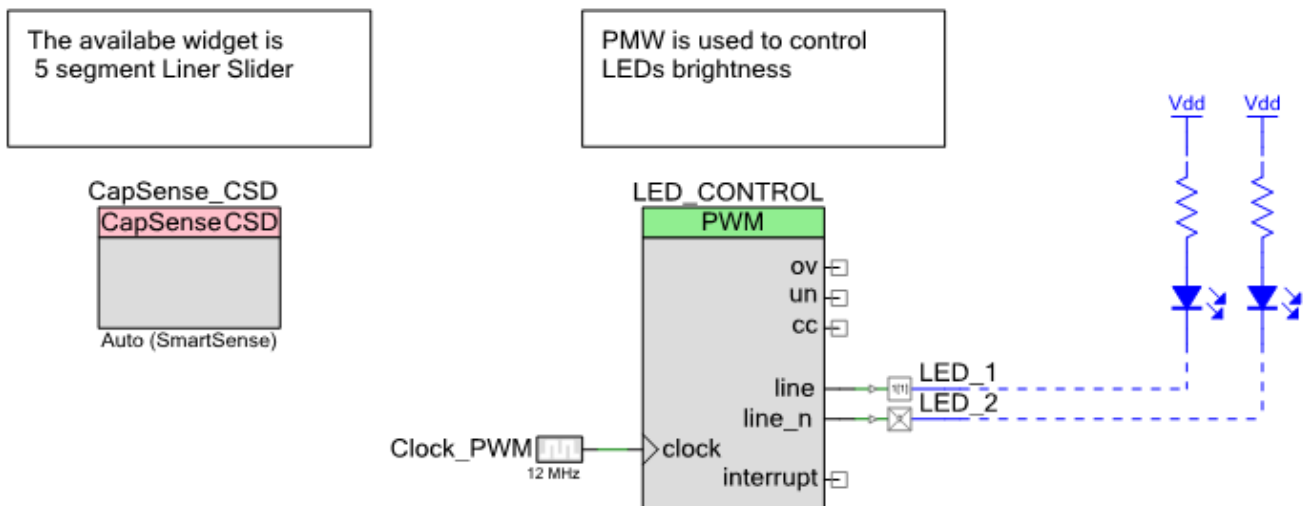


Figure 1. Top design schematic

The PWMs is configured to drive two LEDs from the Tri-color LED.

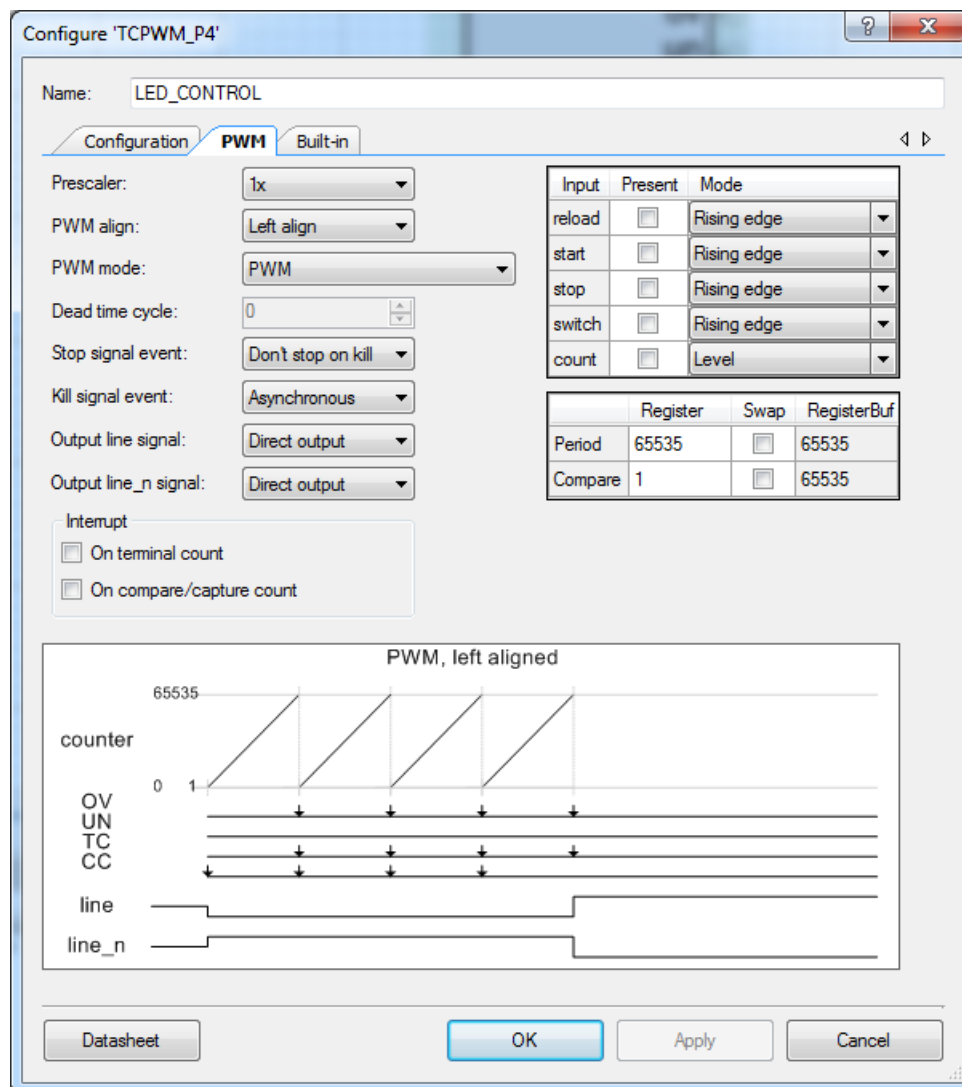


Figure 2. PWMs configuration

The CapSense_CSD component is configured with the Tuning method Auto for 1 Linear Slider.



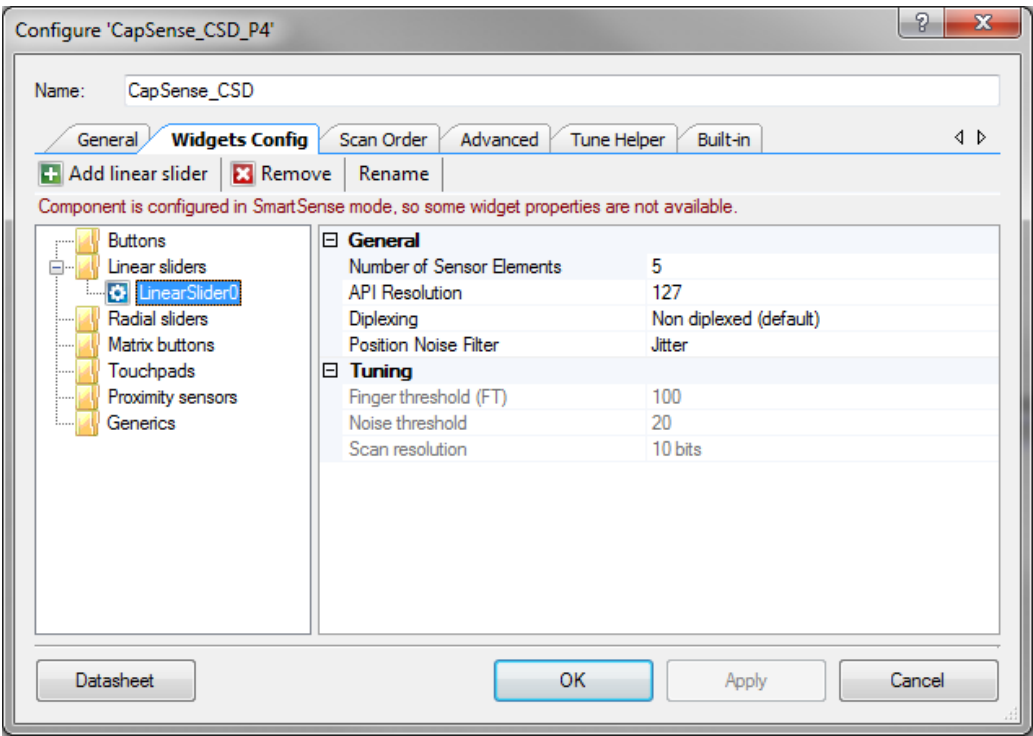



Figure 3. CapSense_CSD Widget Config Tab

The clock system configuration is shown in Figure 5.

PSoC 4100/4200

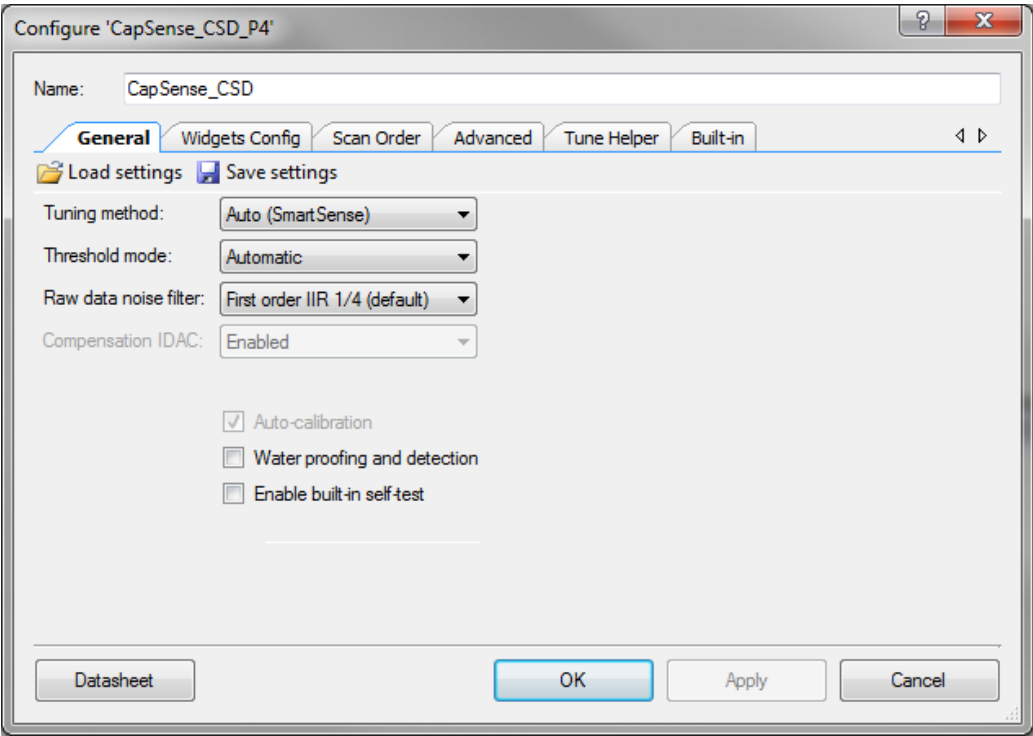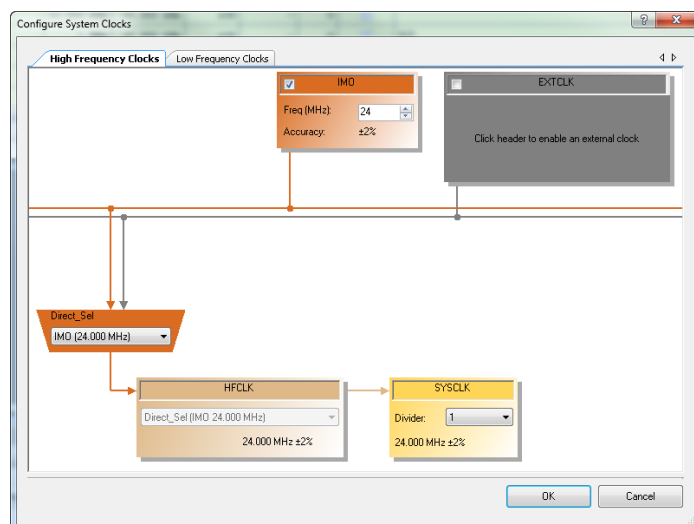

PSoC4000

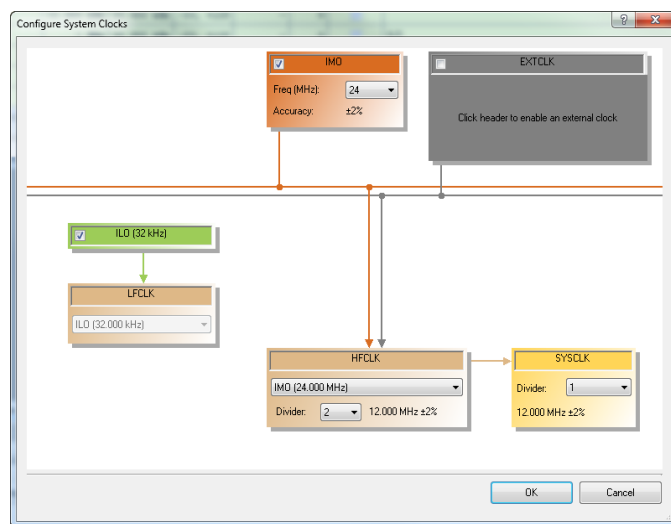

PSoC 4100/P4200-BL

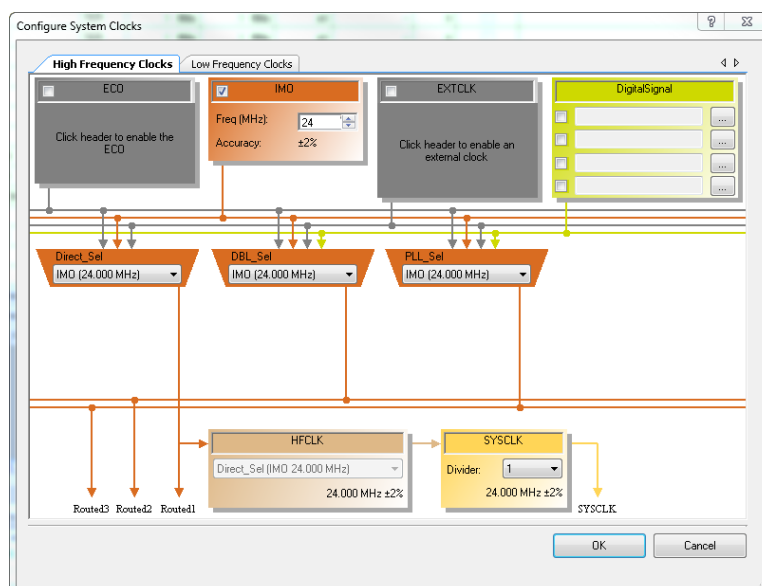


Figure 5. “Configure System Clocks” windows

Project Description

The project demonstrates setting the LED color on CY8CKIT-042/CY8CKIT-042-BLE KITS (or LED brightness on CY8CKIT-040) using a CapSense slider touch position. No additional connection is required.

Expected results

On the CY8CKIT-042/CY8CKIT-042-BLE KITS a touch position changes the LED color if moving up and vice versa in the downward direction.

On the CY8CKIT-040 Slider a touch position changes the LED brightness from low to high if moving up and vice versa in the downward direction.

© Cypress Semiconductor Corporation, 2009-2014. The information contained herein is subject to change without notice. Cypress Semiconductor Corporation assumes no responsibility for the use of any circuitry other than circuitry embodied in a Cypress product. Nor does it convey or imply any license under patent or other rights. Cypress products are not warranted nor intended to be used for medical, life support, life saving, critical control or safety applications, unless pursuant to an express written agreement with Cypress. Furthermore, Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress products in life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

PSoC® is a registered trademark, and PSoC Creator™ and Programmable System-on-Chip™ are trademarks of Cypress Semiconductor Corp. All other trademarks or registered trademarks referenced herein are property of the respective corporations.

Any Source Code (software and/or firmware) is owned by Cypress Semiconductor Corporation (Cypress) and is protected by and subject to worldwide patent protection (United States and foreign), United States copyright laws and international treaty provisions. Cypress hereby grants to licensee a personal, non-exclusive, non-transferable license to copy, use, modify, create derivative works of, and compile the Cypress Source Code and derivative works for the sole purpose of creating custom software and or firmware in support of licensee product to be used only in conjunction with a Cypress integrated circuit as specified in the applicable agreement. Any reproduction, modification, translation, compilation, or representation of this Source Code except as specified above is prohibited without the express written permission of Cypress.

Disclaimer: CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Cypress reserves the right to make changes without further notice to the materials described herein. Cypress does not assume any liability arising out of the application or use of any product or circuit described herein. Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress' product in a life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Use may be limited by and subject to the applicable Cypress software license agreement.

