

TECHNICAL SPECIFICATIONS - DOMINATOR SERIES 3 - KGDB / KCDB

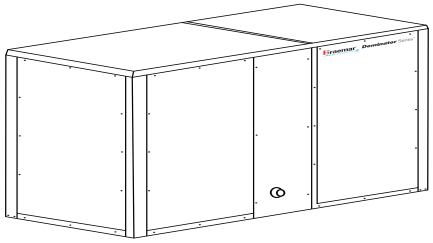

KGDB***A1S INDOOR UNIT


- Built in drain pump, max 1m lift
- Wide ESP range, 100 ~ 400Pa
- Micro channel heat exchanger indoor coil
- Multi speed EC Backward curve Centrifugal Fan
- Adjustable room temperature sensing location
- Optional Modbus controls

Standard Control



WIRED WALL CONTROLLER

- XE7C-24/HC wired wall control (WiFi built in)
- Wired back lit wall control (2 wire)
- 5 Modes: Auto-Cool-Dry-Heat-Fan
- Variable fan Speeds
- Sleep-Quiet-Turbo Modes
- Multiple timer, 7-day time clock, 14-day time clock
- Selectable Auto Restart Option
- Multiple language options

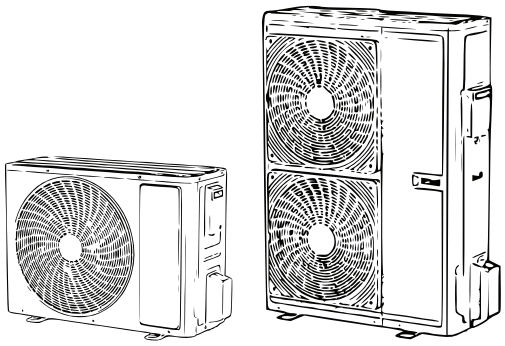

KCDB***D1B outdoor unit

- Dedicated Dominator Series Outdoor units
- DRED (RJ45 connector)
- Black fin Outdoor coil
- Up to 75m Max field pipe
- Single drain connection
- DC Fan motor & Compressor
- Slim design
- R32 chargeless length 25m
- Wide outdoor operating range

PERFORMANCE SUMMARY

Outoor Unit	Indoor Unit	Max Airflow l/s (m³/h)	Cooling Capacity (kW)	Heating Capacity (kW)	Rated AEER (W)	Rated ACOP (W)
KCDB145D1B	KGDB145A1S	600 (2160)	11.6	12.1	3.3558	3.8699
KCDB195D1B	KGDB195A1S	950 (3420)	16.5	17.9	3.2493	3.2796

It is a policy of Seeley International to introduce continual product improvement. Accordingly specifications are subject without notice.


TECHNICAL SPECIFICATIONS - DOMINATOR SERIES 3 - KGDB / KCDB

SPECIFICATIONS


Model			Outdoor	KCDB145D1B	KCDB195D1B
			Indoor	KGDB145A1S	KGDB195A1S
Rated Heating Capacity			kW	12.10	17.90
Heating Capacity Range (Min~Max)			kW	2.70 ~ 14.20	4.60 ~ 19.00
Heating Capacity at 2°C			kW	9.25	13.70
Rated Cooling Capacity			kW	11.60	16.50
Cooling Capacity Range			kW	3.80 ~ 13.10	4.50 ~ 17.70
HSPF Residential (Hot / Average / Cold)			-	4.937 / 4.152 / 3.464	4.836 / 3.995 / 3.415
TCSPF Residential (Hot / Average / Cold)			-	4.410 / 4.225 / 4.268	4.679 / 4.464 / 4.648
ACOP / AEER			W	3.87 / 3.36	3.28 / 3.25
ZERL Star Rating Hot / Average / Cold		Heating	-	3.0 / 2.5 / 1.5	3.0 / 2.0 / 1.5
		Cooling	-	2.5 / 2.5 / 2.5	3.0 / 2.5 / 3.0
Electrical Data	Power supply		V/Hz/Ph	230 / 50 / 1	
	Power Input (Nominal)	Heating	kW	3.10	5.43
		Cooling	kW	3.43	5.05
	Indoor Power from Outdoor (Min)		mm²	1.0	1.0
	Rated Current		A	22.5	25.5
	Circuit breaker (Max)		A	32	
Indoor Unit	Rated Airflow		l/s	600 l/s	950 l/s
	Airflow (Min ~ Max)		l/s	150 - 750 l/s	300 - 950 l/s
	Min~Max ESP		Pa	100 ~ 400	
	Drain Pump		Y/N	Yes	Yes
	Sound Power Level (min-max)		dB(A)	56 ~ 64	
	Dimension	Outline dimension (W×D×H)	mm	1148 x 530 x 802	
		Fan Section Only	mm	460 x 530 x 802	
		Coil Section Only	mm	688 x 530 x 802	
		Package dimensions (W×D×H)	mm	1200 x 553 x 932	
	Weight	Net Weight	kg	62	
		Fan Section Only	kg	26	
		Coil Section Only	kg	36	
		Gross Weight	kg	67	
Outdoor Unit	Sound Power Level		dB(A)	72	70
	Sound Pressure		dB(A)	58	60
	Dimension	Outline dimension (W×D×H)	mm	940 x 370 x 820	900 x 340 x1260
		Package dimensions (W×D×H)	mm	1095 x 500 x 955	1033 x 443 x 1405
	Number of Fans		QTY	1	2
	Weight	Net weight	kg	64	94
		Gross weight	kg	77	104
Ambient Operating Temperature Range		Cooling	°C	-15 ~ 52	
		Heating	°C	-15 ~ 24	
Pipe	Minimum Pipe Length		m	5.0	
	Outer Diameter	Liquid Pipe	mm (Inch)	Ø9.52 (3/8)	
		Gas Pipe	mm (Inch)	Ø15.88 (5/8)	
	Max Distance	Height	m	30	
		Length	m	75	
Refrigerant	Base Charge		R32 - kg	2.2	3.5
	Chargeless Length		m	25	
	Additional charge (Over 25m)		g/m	35	

TECHNICAL SPECIFICATIONS - DOMINATOR SERIES 3 - KGDB / KCDB


INDOOR UNIT DIMENSIONS

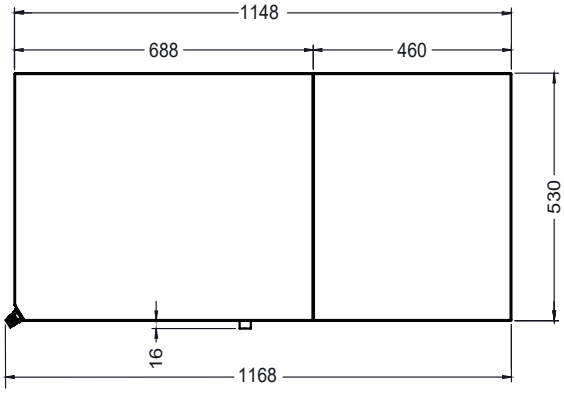

TOP VIEW

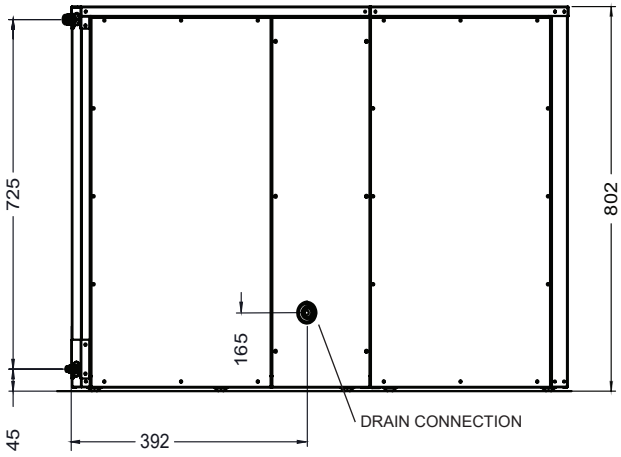

FRONT VIEW

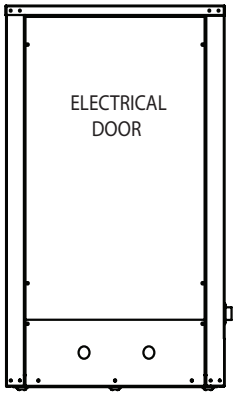


SIDE VIEW

Dominator Series 3 standard duct connection sizes as supplied.			
Model Number	**Part Number**	**Return air**	**Supply air**
KGDB145A1S	085341 INT	Ø350mm	Ø300mm
	085358 EXT	Ø350mm	Ø300mm
KGDB195A1S	085340 INT	Ø400mm oval	Ø400mm oval
	085357 EXT	Ø400mm square round corners	Ø400mm square round corners

Optional Duct Connections				
Size (mm)	300 (Round)	350 (Round)	400 (Square hole with rounded)	450 & 500 (Oval 400mm with c/w etchings)
KIT number	655641	655650	655640	655630
	Each kit contains 2 insulated panels with the corresponding hole size pre-cut			

TECHNICAL SPECIFICATIONS - DOMINATOR SERIES 3 - KGDB / KCDB

INDOOR UNIT MINIMUM CLEARANCES

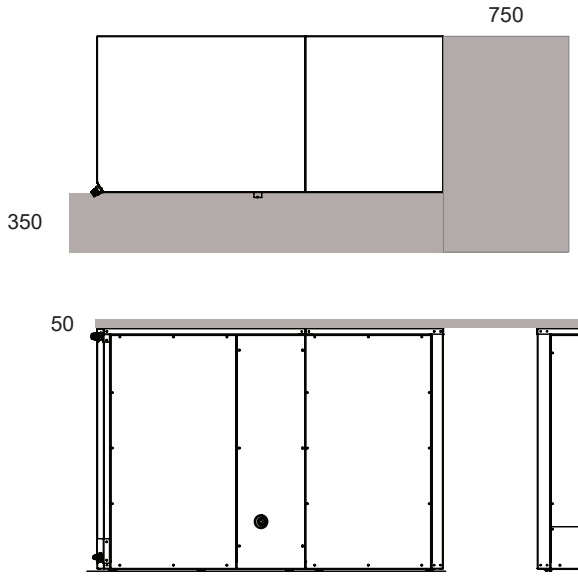

Shaded zones indicate minimum clearances for service access


CAPACITY TABLE : FREE RUN OPERATION

Free Run KGDB195A1S / KCDB195D1B						
Heating - at 7°C DB Ambient & 20°C DB return air						
Airflow (L/S)	400	500	600	700	800	900
Total Heating Capacity (W)	11450	16650	17850	18350	18650	18900
Total Power Input (W)	3500	5600	5650	5800	5850	5900
Cooling - at 35°C DB Ambient & 27°CD B/19°C WB return air						
Airflow (L/S)	400	500	600	700	800	900
Sensible Cooling Capacity (W)	7250	8800	10950	11850	12750	13450
Total Cooling Capacity (W)	10200	12000	15650	16250	17150	17500
Total Power Input (W)	2750	3350	4900	5000	5500	5550


Free Run KGDB145A1S / KCDB145D1B						
Heating - at 7°C DB Ambient & 20°C DB return air						
Airflow (L/S)	150	200	300	400	500	600
Total Heating Capacity (W)	5500	6900	10300	12350	13400	14100
Total Power Input (W)	3700	4400	5000	4850	4450	4250
Cooling - at 35°C DB Ambient & 27°C DB/19°C WB return air						
Airflow (L/S)	150	200	300	400	500	600
Sensible Cooling Capacity (W)	4300	5650	6900	7950	9000	9700
Total Cooling Capacity (W)	7000	8900	10350	11400	12150	12550
Total Power Input (W)	3550	3700	3850	3950	4050	4150

TECHNICAL SPECIFICATIONS - DOMINATOR SERIES 3 - KGDB / KCDB

DIMENSIONS - OUTDOOR UNIT

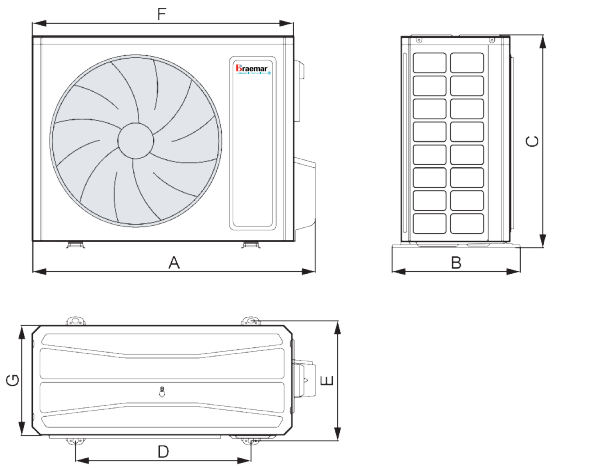

KCDB145D1B

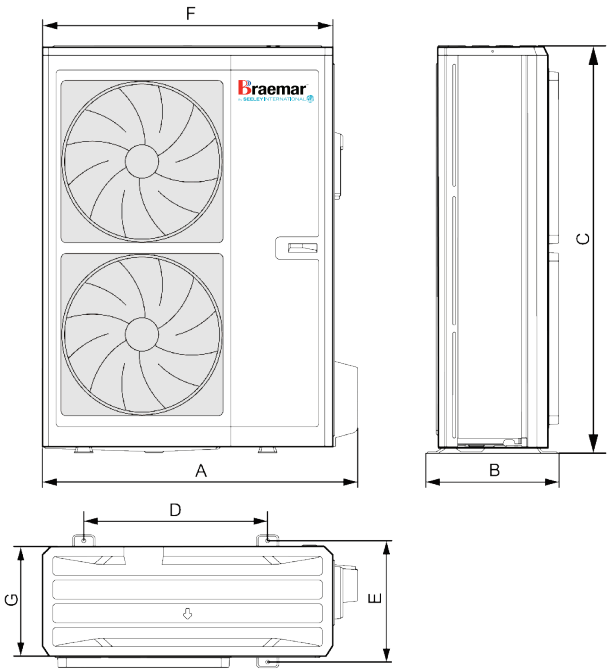


KCDB195D1B

Dimension (mm)							
MODEL	A	B	C	D	E	F	G
KCDB145D1B	1020	427	820	635	396	940	370
KCDB195D1B	978	415	1260	570	378	900	340

TECHNICAL SPECIFICATIONS - DOMINATOR SERIES 3 - KGDB / KCDB


MINIMUM CLEARANCES

When one outdoor unit is to be installed

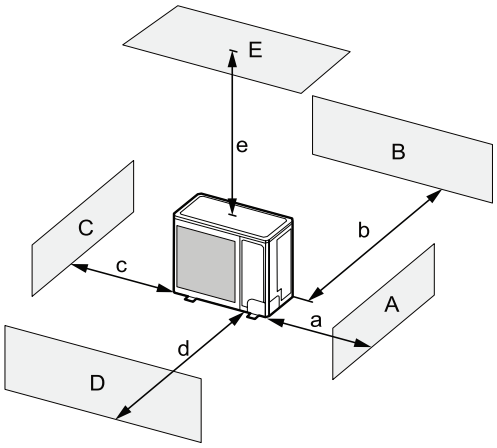

A~E	(mm)				
	a	b	c	d	e
B	-	≥100	-	-	-
A, B, C	≥300	≥100	≥100	-	-
B, E	-	≥100	-	-	≥1000
A, B, C, E	≥300	≥150	≥150	-	≥1000
D	-	-	-	≥1000	-
D, E	-	-	-	≥1000	≥1000
B, D	-	≥100	-	≥1000	-
B, D, E	-	≥250	-	≥2000	≥1000

When two or more outdoor units are to be installed side by side

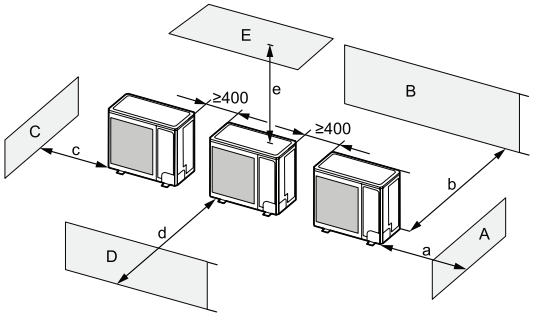

A~E	(mm)				
	a	b	c	d	e
A, B, C	≥300	≥300	≥1000	-	-
A, B, C, E	≥300	≥300	≥1000	-	≥1000
D	-		-	≥2000	-
D, E	-		-	≥2000	≥1000
B, D	-	≥300	-	≥2500	-
B, D, E	-	≥300	-	≥2500	≥1000

When outdoor units are installed one above another

