

# **The OPS-model**

Description of OPS 4.5.2

Ferd Sauter  
Margreet van Zanten  
Eric van der Swaluw  
Jan Aben  
Frank de Leeuw  
Hans van Jaarsveld

National Institute for Public Health and the Environment (RIVM)

## **Changes with respect to previous description (v4.5.0)**

FS, 2016-05-12: finished documentation of previous version 4.5.0.  
FS, 2017-11-29: section 5.1, 5.5.1 - change from dominant land use over trajectory to percentage of each land use class over trajectory  
FS, 2018-02-19 small correction on convergence criterion for iteration in section 7.3 on background concentrations  
FS, 2018-03-14 finished documentation of current version 4.5.2.

FS: Ferd Sauter

## Summary

This report describes in detail OPS 4.5.x., a version of the OPS (Operational Priority Substances) model. OPS simulates the atmospheric process sequence of emission, dispersion, transport, chemical conversion and deposition. The main purpose of the model is to calculate the concentration and deposition of pollutants (e.g. particulate matter, acidifying compounds like SO<sub>2</sub>, NO<sub>x</sub> and NH<sub>3</sub>) for the Netherlands using a high spatial resolution (typical 1 x 1 km<sup>2</sup>). The model is, however, set up as a universal framework supporting the modelling of other pollutants such as fine particles and persistent organic pollutants. Previous versions of the model have been used since 1989 for atmospheric transport and deposition calculations published in the State of the Environment reports and Environmental Outlook studies in the Netherlands. Current versions are in use for the production of large-scale maps of air pollution in the Netherlands (RIVM 2011, Velders et al. 2011).

This report is an update of the report *Description and validation of OPS-Pro 4.1*, RIVM report 500045001/2004 (van Jaarsveld, 2004). In this update, some processes have been described in more detail with explanatory figures. Furthermore, model changes, which have taken place since 2004, have been described. The main changes in the OPS-model are:

- a canopy compensation point has been included in the parameterisation of ammonia deposition (DEPAC module, van Zanten et al. 2010)
- a grid cell average is computed over multiple receptors inside a grid cell
- area sources are subdivided into sub area sources for increased accuracy
- inclusion of PM<sub>2.5</sub> (extra particle class)
- the roughness length is averaged over the whole trajectory; the roughness length map is updated
- background concentrations are updated (more recent years, future years, higher spatial resolution).

The various model validation exercises, described in van Jaarsveld (2004) are not repeated here. For further validation studies, the reader is referred to van Jaarsveld et al. (2005). A study on the dispersion of ammonia in an agricultural area is reported in van Pul et al. (2008). An intercomparison of measured and modelled ammonia concentrations in nature areas can be found in Stolk et al. (2009). A study on the influence of sea-salt particles on the exceedances of daily PM<sub>10</sub> air quality standards is given in van Jaarsveld and Klimov (2011). A comparison between modelled and measured wet deposition levels of ammonium, nitrate and sulphate over the period 1992-2008 was reported in van der Swaluw et al. (2011).

## Contents

1.	Model description .....	6
1.1	Introduction .....	6
1.2	Substances .....	6
1.3	Model characteristics.....	7
1.3.1	Receptors.....	9
1.3.2	Trajectories .....	10
1.3.3	Vertical stratification .....	12
1.3.4	Classification with respect to the vertical structure of the boundary layer.....	13
1.4	References .....	15
2.	Meteorological data .....	16
2.1	Meteorological districts in the OPS model .....	16
2.2	Sources of primary meteorological data.....	17
2.3	Processing primary data (MPARKNMI).....	18
2.3.1	Calculating the potential wind speed .....	20
2.3.2	Spatial averaging of meteorological data.....	20
2.3.3	Calculation of precipitation characteristics.....	21
2.3.4	Determination of the snow cover indicator.....	22
2.4	The meteorological pre-processor (METPRO) .....	23
2.4.1	Cloud cover.....	23
2.4.2	Derivation of boundary layer parameters .....	24
2.4.3	Pasquill classes.....	25
2.4.4	Estimation of mixing heights .....	26
2.4.5	The wind profile.....	27
2.4.6	Trajectories .....	30
2.4.7	Summary of the meteorological data set.....	33
2.5	References .....	34
2.6	Appendix: meteorological stations.....	36
3.	Mass balance and dispersion.....	37
3.1	Mass balance equations.....	37
3.2	Dispersion.....	38
3.3	Vertical mixing close to sources .....	39
3.3.1	Dispersion of heavy plumes.....	40
3.3.2	Local vertical dispersion .....	41
3.4	Area sources .....	47
3.4.1	Horizontal dispersion for area sources.....	47
3.4.2	Vertical dispersion for area sources .....	49
3.5	References .....	51
4.	Emission and emission processes .....	53
4.1	Emissions: behaviour in time .....	53
4.2	Emission speciation.....	57
4.3	Emission processes.....	58
4.3.1	Plume rise.....	58
4.3.2	Inversion penetration .....	59
4.3.3	NH <sub>3</sub> emissions from manure application .....	60
4.3.4	NH <sub>3</sub> emissions from animal housing systems.....	61

4.4	References .....	62
5.	Dry deposition.....	63
5.1	Land use and roughness length .....	66
5.2	Source depletion .....	67
5.3	Source depletion for heavy plumes .....	70
5.4	Dry deposition of non-acidifying substances .....	72
5.5	Dry deposition of acidifying and eutrophying substances, DEPAC .....	73
5.5.1	Dry deposition of gaseous substances.....	73
5.5.2	Dry deposition of NO <sub>x</sub> .....	77
5.5.3	Dry deposition of acidifying aerosols .....	77
5.5.4	Dry deposition of NO <sub>3</sub> <sup>-</sup> + HNO <sub>3</sub> .....	79
5.6	Appendix .....	80
5.6.1	Derivation of the source depletion ratio for phase II of a plume .....	80
5.6.2	Derivation of the source depletion ratio for a heavy plume.....	82
5.7	References .....	84
6.	Wet deposition .....	86
6.1	In-cloud scavenging .....	86
6.2	Below-cloud scavenging .....	87
6.2.1	Below-cloud scavenging of gases .....	87
6.2.2	Below-cloud scavenging of particles .....	88
6.3	Effects of dry and wet periods on average scavenging rates.....	89
6.4	Combined in-cloud and below-cloud scavenging .....	91
6.5	Scavenging of reversibly soluble gases.....	92
6.6	Overview of wet scavenging parameters .....	93
6.7	Verification and validation studies.....	94
6.8	References .....	94
7.	Chemical transformation.....	96
7.1	Non-acidifying substances .....	96
7.2	Acidifying and eutrophying substances .....	97
7.2.1	Sulphur compounds .....	99
7.2.2	Nitrogen oxides .....	100
7.2.3	Ammonia compounds .....	105
7.3	Prescribed concentration levels (background concentrations) .....	107
7.4	Secondary species in OPS .....	111
7.5	References .....	112

# 1. Model description

## 1.1 Introduction

Modelling atmospheric processes has been the subject of many studies, resulting in a range of models with various complexities for specific applications. Before selecting a model or a model approach, we have to assess the intended application area carefully. In the present case, the time scale (long-range with a time resolution of a season or a few months) is probably the most important boundary condition. Another important condition is the spatial scale of the receptor area, which is defined as the Netherlands with a resolution of  $5 \times 5 \text{ km}^2$  or  $1 \times 1 \text{ km}^2$ . The emission area, however, must be at least  $2000 \times 2000 \text{ km}^2$  to explain the contribution of long-range transport to the levels of pollutants in the Netherlands. When OPS came into use (around 1985), these conditions forced exclusion of an Eulerian model framework, simply because of the required computer capacity. Furthermore, Eulerian models can suffer from large errors on a local scale, due to numerical dispersion. Eulerian models using nested grids should, to a certain extent, be applicable; however, operational models of this type were not available at that time.

An efficient method for calculating long-term averages is arranging situations having similar properties into classes and then calculating representative concentrations for each of the classes. The average value will then follow from a summation of all concentrations, weighted with their relative frequencies of occurrence. Such a method is used for the OPS-model and is described in this chapter. One of the problems that arises from this approach is the choice of a good classification scheme on the basis of relevant parameters. For short-range models, a classification is usually made on the basis of wind direction, wind speed and atmospheric stability (see, for example Calder, 1971; Runca *et al.*, 1982). As will be explained in more detail later on, OPS uses a classification based on transport distance, wind direction and a combination of atmospheric stability and mixing height.

The approach used for the OPS-model, can be classified as a long-term climatological trajectory model which treats impacts of sources on a receptor independently. The model is basically a linear model. Because chemical conversion rates and dry deposition velocities depend on background concentrations taken from a series of concentration maps, one may call it a pseudo non-linear model. The physical background of the model concept and the derivation of relevant meteorological parameters from routine meteorological observations will be described in this chapter.

## 1.2 Substances

The OPS model works with three groups of substances:

1. Acidifying and eutrophying substances ( $\text{SO}_2$ ,  $\text{NO}_x$ ,  $\text{NH}_3$  and secondary products).
2. Non-acidifying (gaseous) substances
3. Particle-bounded substances.

### *Acidifying and eutrophying substances*

Important environmental problems are the so-called acidification and eutrophication of ecosystems through the deposition of acidifying and eutrophying components. In this case a number of relevant processes have to be included in the model approach, since otherwise the model cannot adequately describe spatial differences and/or the development in time. Another reason for a special treatment of these components is the more than average availability of experimental data on emission, conversion and deposition processes. In OPS, the acidifying components include:

sulphur compounds (SO <sub>x</sub> )	sulphur dioxide (SO <sub>2</sub> ) sulphate (SO <sub>4</sub> <sup>2-</sup> )
oxidised nitrogen compounds (NO <sub>y</sub> )	nitrogen oxides (NO and NO <sub>2</sub> ) peroxyacetyl nitrate (PAN) nitrous acid (HNO <sub>2</sub> ) nitric acid (HNO <sub>3</sub> ) nitrate (NO <sub>3</sub> <sup>-</sup> )
reduced nitrogen compounds (NH <sub>y</sub> )	ammonia (NH <sub>3</sub> ) ammonium (NH <sub>4</sub> <sup>+</sup> )

The gaseous SO<sub>2</sub>, NO and NH<sub>3</sub> are primary emitted pollutants, while the gaseous NO<sub>2</sub>, PAN, HNO<sub>2</sub> and HNO<sub>3</sub> and the non-gaseous SO<sub>4</sub><sup>2-</sup>, NO<sub>3</sub><sup>-</sup> and NH<sub>4</sub><sup>+</sup> are formed from the primary pollutants in the atmosphere under influence of concentrations of, for example, ozone (O<sub>3</sub>) or free OH-radicals. In OPS, however, the primary oxidised nitrogen pollutant is defined as the sum of NO and NO<sub>2</sub>, further denoted as NO<sub>x</sub>. The secondary products SO<sub>4</sub><sup>2-</sup>, NO<sub>3</sub><sup>-</sup> and NH<sub>4</sub><sup>+</sup> form mainly ammonia salts having low vapour pressures and consequently appearing as aerosols in the atmosphere (Stelson and Seinfeld, 1982).

#### *Non-acidifying (gaseous) substances*

The group of non-acidifying substances uses a generic approach in which the properties of the substance are expressed in general terms such as:

- a chemical conversion/degradation rate
- a dry deposition velocity or a surface resistance
- a wet scavenging ratio.

#### *Particle-bounded substances*

A generic approach is followed for substances attached to particles in which the size distribution of the particles fully defines the atmospheric behaviour.

## 1.3 Model characteristics

The long-term OPS-LT model, which is outlined here, is a long-term Lagrangian transport and deposition model that describes relations between individual sources or source areas, and individual receptors by Gaussian plumes. The model is statistical in the sense that concentration and deposition values are calculated for a number of typical situations (classes) and the long-term value is obtained by summation of these values, weighted with their relative frequencies of occurrence.

The short-term OPS-ST model is used on an hourly basis and computes hourly concentrations and depositions for a limited area (~ 0 - 50 km) only, using steady-state Gaussian plumes. The OPS-ST model will be described in a separate report. The description in this report is for the OPS-LT model, but many processes are modelled in OPS-ST in the same way.

All equations governing the transport and deposition process are solved analytically, allowing the use of non-gridded receptors and sources, and variable grid sizes. OPS-LT assumes that transport from a source to a receptor takes place in straight, well-mixed sectors of height  $z_i$  and horizontal angles of 30° (see Figure 1.1).




Figure 1.1. OPS wind rose for 12 wind sectors of 30°; wind direction North = 0°.

Corrections are applied close to the source to account for emission height and vertical dispersion; a correction for the curved nature of real transport paths is used for larger distances (see section 0 for more detail). An important difference with (true) probabilistic long-term models is that the OPS model is driven by actually observed meteorological parameters (hourly or 6-hourly synoptical data).

A schematic overview of the OPS model, consisting of three main parts, is given in Figure 1.2. These parts are:

- a. a primary pre-processor MPARKNMI that reads hourly meteorological observations and interpolates these observations to 6 meteorological regions in the Netherlands.
- b. A secondary pre-processor METPRO that calculates transport trajectories arriving at a receptor on the basis of hourly wind observations. METPRO also derives secondary parameters, which define the atmospheric state along the trajectories from the observed data. This pre-processor classifies hourly meteo data into groups with similar properties and, in this way, describes the necessary statistics for the relevant period.
- c. The OPS-model itself, which computes concentrations and depositions on the basis of various inputs.

Each part is used separately. The pre-processors have to be run once for each period (month, season, year or a number of years) and for each meteorological district that is used in OPS (see **Figure 2.1**). Results are placed in a database as a set of tables, consisting of frequencies of occurrence of a combination of transport distance, wind direction and stability/mixing height class. The OPS-model selects its necessary climatological data from the database, depending on the location of the receptor, the source-receptor direction and the period of interest.



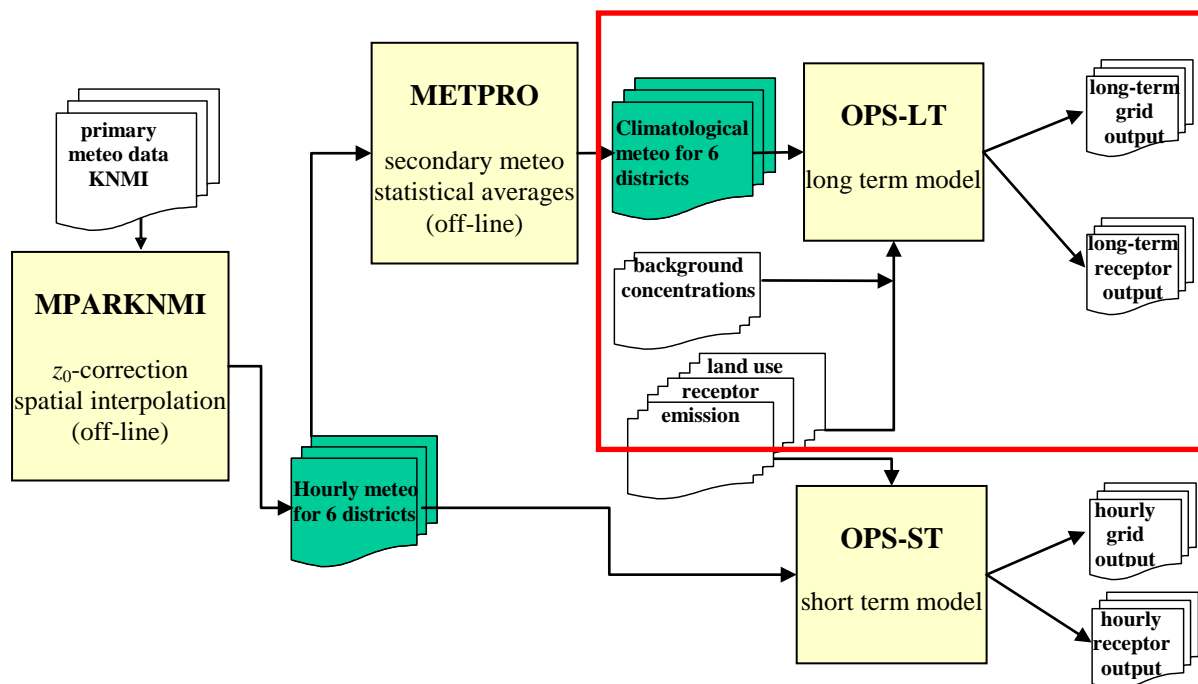


Figure 1.2 Schematic view of the long term and short term OPS models with its pre-processing steps by the programs MPARKNMI and METPRO. Note that most users will only use the OPS-LT part in the red box.

The basic meteorological input consists of wind direction and wind speed at two heights, precipitation data, global radiation (or cloud cover), temperature and snow cover, all measured at one or more locations in the Netherlands.

Long range transport is modelled under the assumption that meteorological conditions in the whole model area at a certain hour are equal to the conditions in the Netherlands at the same hour. Since we combine all wind observations in the Netherlands into an average wind vector, we assume that this vector is representative for an area at least twice the size of the Netherlands (NL ~ 200-300 km). A further argument is the use of observations at greater heights (TV-towers (120-300 m) and a meteorological tower (200 m)), together producing data representative for a larger area. Finally, one may consider that long range transport takes place mainly during higher wind speeds, when wind direction is less variable and transport time is low.

Other inputs into the model are information on receptors and information on sources (coordinates, emission strength, height, horizontal dimensions, etc.). The output of the model includes concentration, dry deposition and wet deposition data, listed either by receptor or in gridded form.

### 1.3.1 Receptors

The area for which concentrations and depositions can be calculated is determined by the size of the area for which meteorological parameters are known. Since the standard climatological data set used for this model is based on observations from the Royal Netherlands Meteorological Institute (KNMI), the maximum size of the receptor area becomes, in effect, the Netherlands and adjoining regions. The land-use and terrain roughness data maps, covering only the Netherlands in great detail, also impose limitations.

Receptor parameters that need to be specified are coordinates, roughness length and land use. The receptor height is fixed within the OPS model. In terms of the vertical dispersion, the receptor height is set to 0 m. In terms of the influence of dry deposition on the vertical concentration profile, the receptor height is 3.8 m, in other words, the measuring height of the Netherlands' air quality measuring network LML.

The OPS-model reads the land-use type and the roughness length of the receptor location from maps. For specific receptor locations the model selects the land-use properties from the 250 m resolution map. In the case of gridded receptor points, the model selects a corresponding spatial resolution (250, 500, 1000, 5000 m). It is important to note here that the calculation of a grid-cell representative

roughness length is based on a logarithmic weighing of roughness elements, while the grid cell representative land-use type is defined as the most abundant land-use type within that grid cell.

This model does not explicitly take into account the direct influence of obstacles (e.g. buildings) on the dispersion. Instead, the general influence of obstacles is expressed in the terrain roughness variable, assuming that obstacles are homogeneously distributed over the emission-receptor area. The shortest source-receptor distance for which this model may be used is therefore taken as a function of the terrain roughness length. In flat terrain with no obstacles the minimum distance is in the order of 20 m. For a terrain roughness  $> 0.1$  m, the shortest distance is approx. 200 times the roughness length. When the stack is part of a building, the shortest distance is at least five times the height of the building. The model generates no warnings if these rules are violated. One should be aware that in the case of gridded receptor points in combination with point sources, the minimum source-receptor distance requirement cannot always be met.

Receptor points for calculating concentrations and depositions can be chosen:


- ◆ on a regular (Cartesian) grid, with a grid distance to be chosen. The domain may be pre-defined (the Netherlands) or defined by the user.
- ◆ for a number of specific locations to be defined by the user.

The output format differs according to the option chosen. The latter option is especially useful when results have to be compared with observations. The gridded results are formatted in a matrix form, while the results for specific receptor points are formatted as single records for each point.

When the user selects grid output, OPS automatically generates multiple sub-receptors inside a grid cell in order to be able to compute a representative grid cell average. The number of sub-receptors goes to 1 with increasing source-receptor distance.

### 1.3.2 Trajectories

OPS uses trajectories to assess whether a certain source contributes to the concentration at a certain receptor. A simple example, for two time steps with different wind directions, is shown in Figure 1.3.

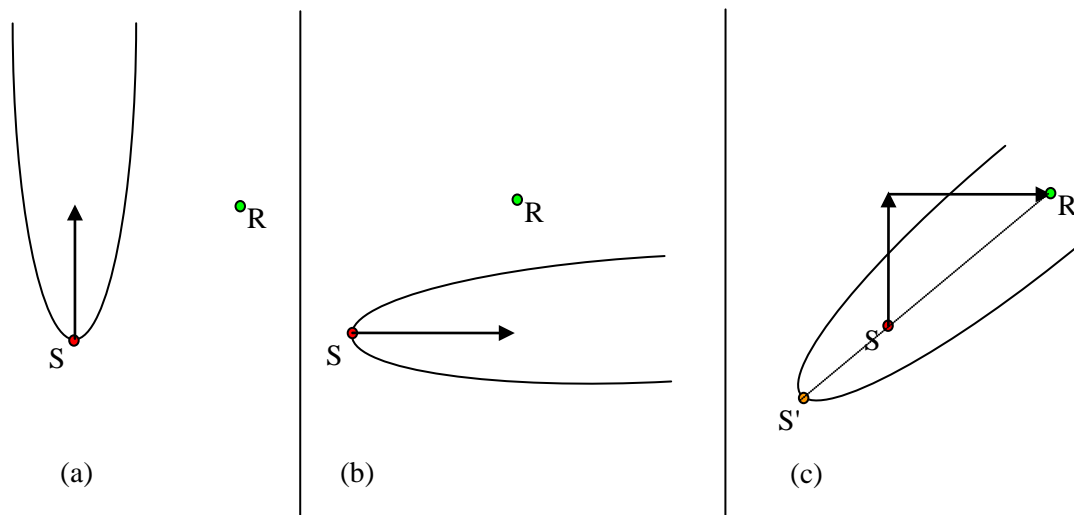

*Figure 1.3 Example of computing the contribution of a source S to a receptor R. (a)  $t = 1$ : Southern wind, plume starting at S; no contribution to R. (b)  $t = 2$ : Western wind, plume starting at S; no contribution to R. (c)  $t = 2$ : contribution of source S emitted at  $t = 1$ , according to plume starting at S' in the direction S-R. Note that to account for the real travel distance along the trajectory, the source S has been shifted to a virtual location S'.*

Each hour, the meteo-preprocessor METPRO traces back the path followed by an air parcel arriving at a receptor point, for four days. The idea is to compute averaged meteo and deposition parameters over this trajectory for four representative distances. METPRO splits such a trajectory into four independent parts:

1. one part representing contributions of local sources  $S_1$  in the direction  $\varphi_1$
2. one part representing contributions of sources  $S_2$  at an intermediate distance (100 km) from the receptor in the direction  $\varphi_2$
3. one part for sources  $S_3$  at a long distance (300 km) from the receptor in the direction  $\varphi_3$
4. one part for sources  $S_4$  at a very long distance (1000 km) from the receptor in the direction  $\varphi_4$ .

For an arbitrary source, inter- and extrapolation is used between distances and wind directions (see Figure 1.4).

A split-up in transport scale is preferred to a split-up in time scales because the trajectories can be directly related to the real positions of receptors and sources.

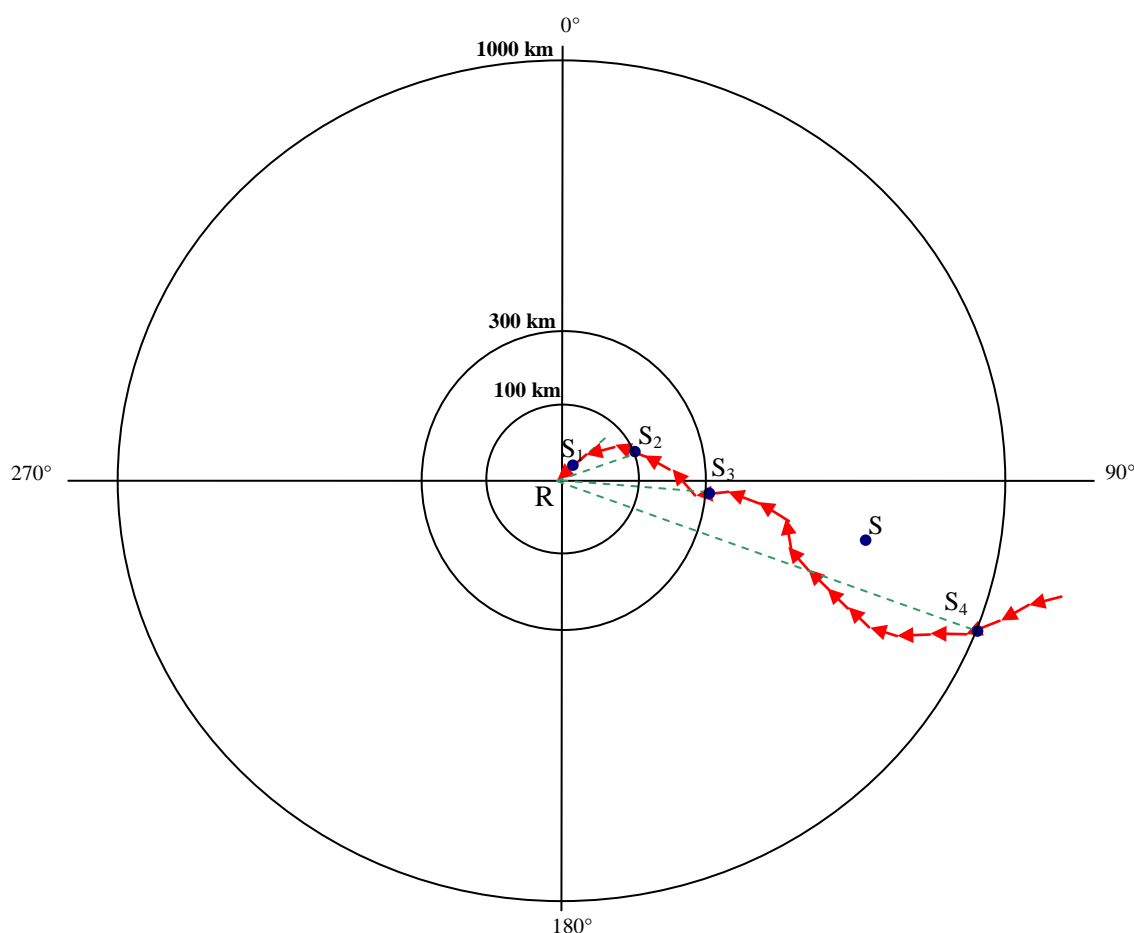


Figure 1.4 *Classification of trajectories in terms of source–receptor distance and source–receptor direction. Receptor R located in the origin. METPRO characterises representative sources  $S_i$  ( $i = 1,4$ ) by transport distance  $d_i$  ( $= 0, 100, 300, 1000$  km) and source–receptor angle  $\varphi_i$  (angle between North and dashed line). Note that  $\varphi_i$  is the angle of the average of all wind vectors between  $S_i$  and R. For a source S as shown here, OPS interpolates all relevant parameters between classes corresponding with distances  $d_3$  and  $d_4$  and angles  $\varphi_3$  and  $\varphi_4$ .*

The local scale represents situations where changes in meteorological conditions during transport are assumed to play no important role. This is usually within 1 or 2 hours after a substance is released into the atmosphere or within 20 km from the point of release. The 1000 km trajectory represents the long-range transport of pollutants with 2-4 days transport time. For most substances the contribution of sources in this range is only 5-10 % (for Western Europe). Statistical properties of trajectories (direction, speed, height) in this range appear to be less sensitive to trajectory lengths, so the properties of these trajectories are also used for transport distances greater than 1000 km. The trajectory of 300 km long is chosen such

that it covers a full diurnal cycle in meteorological parameters, of which the mixing height is the most important. The 100-km trajectory represents transport on a sub-diurnal time scale as an intermediate between the local-and regional-scale transport. Within the 100 km trajectory, transitions in atmospheric stability and mixing height due to night-day transitions occur frequently.

To describe the transport from a source located in a certain wind sector, average properties for all trajectories passing the source area are introduced. An important parameter is the effective path ratio,  $fp_{eff}$ , which is calculated for all four distances considered. This parameter represents the ratio between the length of the (curved) path,  $x_{path}$ , followed by an air parcel and the straight source-receptor distance  $x_{sr}$ :

$$fp_{eff} = x_{path} / x_{sr}. \quad (1.1)$$

The length of the curved path is computed by means of a time-stepping algorithm that takes into account changes in wind speed, wind direction and mixing height during the transport from source to receptor. Individual values for  $fp_{eff}$  range from 1 to 3, with a mean value for the 1000-km trajectory of 1.25. This parameter largely determines the effect of removal processes on concentrations under stagnant conditions. For distances larger than 1000 km, an extrapolation is used for  $fp_{eff}$  (see Figure 1.5).

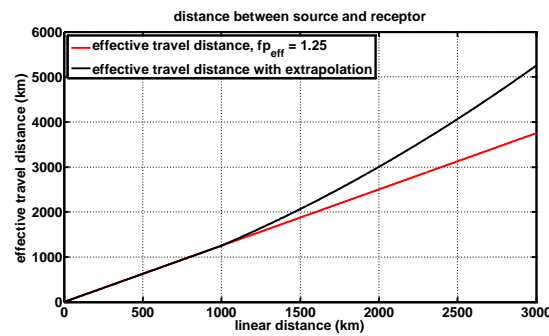


Figure 1.5 Effective travel distance as function of linear distance between source and receptor. In red the effective travel distance using as an example  $fp_{eff} = 1.25$ , in black the effective travel distance as computed in OPS, using an extrapolation for distances above 1000 km.

### 1.3.3 Vertical stratification

Many meteorological parameters show a strong diurnal variation, especially in summertime. This variation is induced by the diurnal cycle in incoming solar radiation, which heats the earth's surface, causing convective turbulent mixing in the lower atmosphere. The variation in the mixing height ranges from about 50 m during nights with a very stable atmosphere, to about 2000 m for days with an unstable atmosphere. The influence of the height of the mixing layer on concentrations is large, since the mixing height actually determines the mixing volume for the material released, especially for larger down-wind distances. An example of the vertical structure of the atmosphere during a three-day period, as it is perceived by the OPS model, is given in Figure 1.6. The behaviour of plumes from high sources with respect to the mixing layer height is also shown.

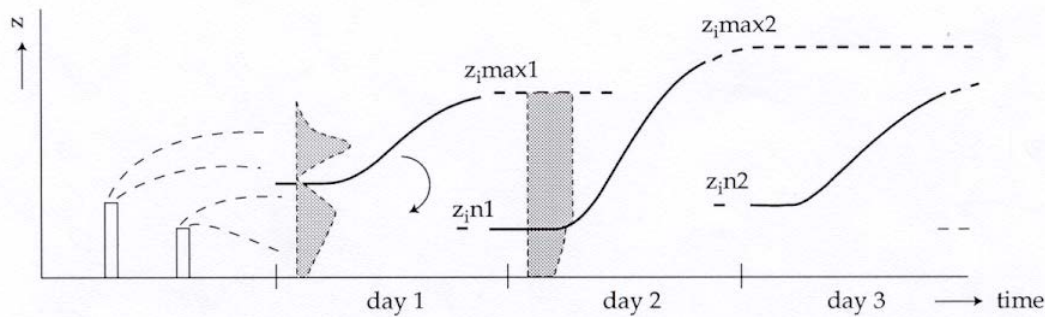


Figure 1.6 Schematic view of the vertical structure of the lower atmosphere as used in the model. The shadowed areas show the vertical concentration distributions at different transport phases. See text below for explanation.

Material released above the mixing layer in the early hours of day 1 will not reach the surface. The vertical dimension of the plume remains small due to absence of turbulence at that height and time (night). A few hours later, the stable night-time situation breaks up when the sun starts to heat the surface again. The plume will then come under the influence of ground-based turbulent movements, which will rapidly mix the plume up through the growing mixing layer. In the late afternoon of day 1, the solar energy reaching the surface will diminish and the convective mixing will stop. The vertical distribution of material at that moment will be considered ‘frozen’ by the model; while, at the same time a ground-based inversion layer is assumed to be generated. Material under this night-time inversion layer is subject to dry deposition during the night, while material above this layer is not. In the morning of day 2, the contents of the two layers will be re-mixed when the mixing height rises above the maximum level,  $z_{i,max1}$ , of the day before. If one considers the situation at the end of day 2, it can be said that the material released during the early hours of day 1 is mixed in a layer,  $z_{i,max2}$ . Local low-level sources, however, will emit at that moment into a layer with height,  $z_{i,n2}$ . In conclusion, contributions to a receptor from local sources must be calculated using local mixing heights. Contributions from sources far away must be calculated using the maximum mixing height that occurred during transport from the source to the receptor.

### 1.3.4 Classification with respect to the vertical structure of the boundary layer

To include the effects of different vertical stratifications in the atmosphere, mixing-height classes are used, over which trajectories are distributed according to the maximum mixing height found during transport from source to receptor. The initial plume height in relation to the mixing height determines whether or not a plume will touch the ground shortly after release. Both parameters are a function of the stability at the source site. Therefore, the chosen classification is a combination of stability at the source and maximum mixing height over the trajectory. To account for stability and mixing height effects, 3 classes for stability and 2 classes for mixing height are taken. The criteria for the classes are given in Table 1.1. The atmospheric stability is defined here on the basis of the Monin-Obukhov length. The mixing-height criteria are chosen such that for the range of seasonal variations a reasonably even occurrence of all classes is obtained.

Table 1.1 Criteria for the atmospheric stability, mixing height and transport distance classes. U, N, S stand for Unstable, Neutral and Stable; the indices 1 and 2 denote relatively low and high mixing height respectively.

Class	Atmospheric stability	Monin-Obukhov length $L$ (m)	Trajectory: 0 km	Trajectory: 100 km	Trajectory: 300 km	Trajectory: 1000 km
			Maximum mixing height over trajectory (m)			
U1	Unstable	$L < 0^{(1)}$	< 500	< 800	< 900	< 1000
U2			$\geq 500$	$\geq 800$	$\geq 900$	$\geq 1000$
N1	Neutral	$L > 100^{(1)}$	< 400	< 400	< 500	< 800

<b>N2</b>			$\geq 400$	$\geq 400$	$\geq 500$	$\geq 800$
<b>S1</b>	Stable	$0 < L < 100$	$< 80$	$< 150$	$< 400$	$< 800$
<b>S2</b>			$\geq 80$	$\geq 150$	$\geq 400$	$\geq 800$

<sup>(1)</sup> the reason that  $L < -100$  is put into the classes U1 or U2 and not into one of the neutral classes, is that we do not want to average out very large positive and very large negative Monin-Obukhov lengths.

This classification scheme for the vertical structure of the boundary layer offers the opportunity to account for source-height effects and temporary transport above an inversion layer. The scheme differs from the one used in earlier versions of the model (Van Jaarsveld, 1990), where the atmospheric stability (Pasquill classification) was determined on the basis of surface-roughness length and Monin-Obukhov length according to Golder (1972).

The development of the maximum mixing height for surface-released air pollutants as a function of down-wind distance is shown in Figure 1.7 for different initial conditions.

The curves in this figure are calculated on the basis of 10-year meteorological data in the Netherlands. It can be concluded that elevated plumes (e.g. 250 m) emitted under stable conditions (classes S1 and S2) remain above the mixing layer for more than 100 km on average. This figure also shows that mixing heights at intermediate distances can be linearly interpolated from the distance classes used here, without making large errors.

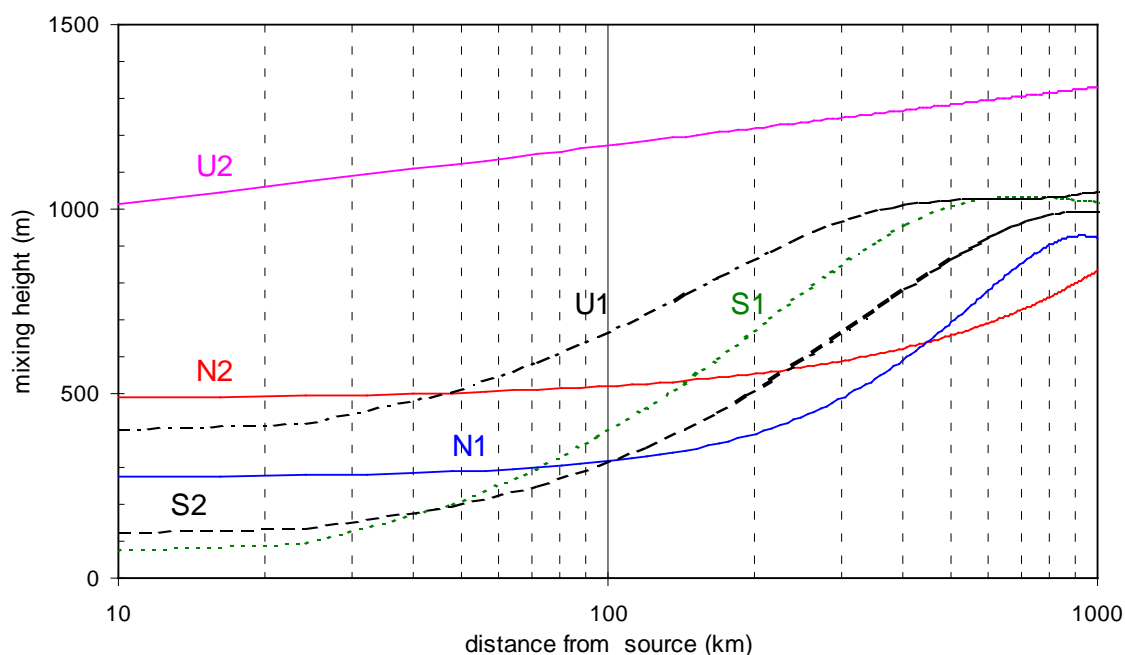


Figure 1.7 Maximum mixing height, as experienced by an air parcel originally at ground level, as a function of down-wind distance for different stability/mixing height conditions at the moment the air parcel was released. Mixing heights are calculated as described in section 2.4.4 and averaged over a period of 10 years.

Summing up the total classification scheme used: the horizontal transport from a source (area) to a receptor is determined by parameters related to one of 288 classes (4 distance scales, 12 wind direction sectors and 6 stability/mixing heights). Parameter values needed to describe source-receptor relations at actual distances and directions are obtained by linearly interpolating between the values of adjacent classes. One important disadvantage of the described classification method is that all reactions and conversions which can take place during transport have to be considered as independent from the absolute concentration values. This means that the method is only applicable to reactions which can be approximated as pseudo-first-order reactions.

## 1.4 References

- Calder K.L. (1971) A climatological model for multiple source urban air pollution. Proceedings of the 2nd Meeting of Expert Panel on Air Pollution Modelling. NATO/CCMS. p. I.1-I.33. Report no. 5.
- Eliassen A. and Saltbones J. (1983) Modelling of long-range transport of sulphur over Europe: a two-year run and some model experiments. *Atmospheric Environment* **17**, 1457-1473.
- Golder D. (1972) Relations among stability parameters in the surface layer. *Boundary-Layer Meteorol.* **3**, 47-58.
- RIVM (2011) Grootschalige Concentratiekaarten Nederland 2011, <http://www.rivm.nl/nl/themasites/gcn/index.html>
- Runca E., Longhetto A. and Bonino G. (1982) Validation and physical parametrization of a Gaussian climatological model applied to a complex site. *Atmospheric Environment* **16**, 259-266.
- Stelson A.W. and Seinfeld J.H. (1982) Relative humidity and pH dependence of the vapor pressure of ammonium nitrate-nitric acid solutions at 25 °C. *Atmospheric Environment* **16**, 993-1000.
- Stolk A.P., van Zanten M.C., Noordijk H, van Jaarsveld J.A. van Pul W.A.J. (2009) Meetnet Ammoniak in Natuurgebieden, Meetnetresultaten 2005 – 2007. RIVM Rapport 680710001/2009
- Van der Swaluw, Eric, Asman, Willem A.H., van Jaarsveld, Hans, Hoogerbrugge, Ronald (2011) Wet deposition of ammonium, nitrate and sulfate in the Netherlands over the period 1992–2008, *Atmospheric Environment*, **45**, 3819-3826, 10.1016/j.atmosenv.2011.04.017.
- Van Jaarsveld J.A. (1990) An operational atmospheric transport model for priority substances; specification and instructions for use. RIVM, Bilthoven, the Netherlands. Report no. 222501002.
- Van Jaarsveld J.A. (2004) Description and validation of OPS-Pro 4.1, RIVM report 500045001/2004.
- Van Jaarsveld, H., Velders G. and Van Pul A. (2005) Evaluation and validation of the OPS multi-scale model using local, national and international datasets. 10<sup>th</sup> Int. Conf. on Harmonisation of Atmospheric Dispersion models for Regulatory Purposes; 17-20 oktober 2005, Sissi, Kreta
- Van Jaarsveld J.A. and D. Klimov (2011) Modelling the impact of sea-salt particles on the exceedances of daily PM<sub>10</sub> air quality standards in the Netherlands. *Int. J. Environment and Pollution*, Vol. 44, Nos. 1/2/3/4, 2011
- Van Pul, W.A.J., J.A. van Jaarsveld, O.S. Vellinga, M.van den Broek, M.C.J. Smits (2008) The VELD experiment: An evaluation of the ammonia emissions and concentrations in an agricultural area. *Atmospheric Environment*, **42**, 8086-8095
- Van Zanten, M.C., F.J. Sauter, R.J. Wichink Kruit, J.A. van Jaarsveld, W.A.J. van Pul (2010) Description of the DEPAC module. Dry deposition modelling with DEPAC\_GCN2010. RIVM report 680180001
- Velders G.J.M, Aben J.M.M., Jimmink B.A., van der Swaluw E., de Vries W.J. (2011) Grootschalige concentratie- en depositiekaarten Nederland. Rapportage 2011, RIVM report 680362001.



## 2. Meteorological data

Air pollution modelling relies heavily on meteorological input data. Processes such as plume rise, dilution, dispersion and long-range transport depend not only on wind speed but also on turbulence characteristics and on the wind field over the area where the pollutant is dispersed. Although parameters such as turbulence may be measured directly in the field, it is not very practical and certainly very expensive. Therefore, most model approaches make a distinction between real observations of primary data (wind, temperature, radiation etceteras) and secondary parameters (friction velocity, Monin-Obukhov length, mixing height etceteras), derived from the set of primary parameters. The OPS model is designed to make use of standard and routinely available meteorological data. The parameters are wind speed and wind direction at two heights, temperature, global radiation, precipitation, snow cover and relative humidity.

### 2.1 Meteorological districts in the OPS model

The OPS model is intended to describe the local dispersion from specific sources but also the total influence of all relevant sources in Europe on all parts of the Netherlands. This means that - in principle - the meteorological information must be available, along with some spatial detail. For this purpose, six meteorological districts have been chosen, mainly on the basis of the average wind speed regime over the Netherlands. The districts are shown in Figure 2.1.

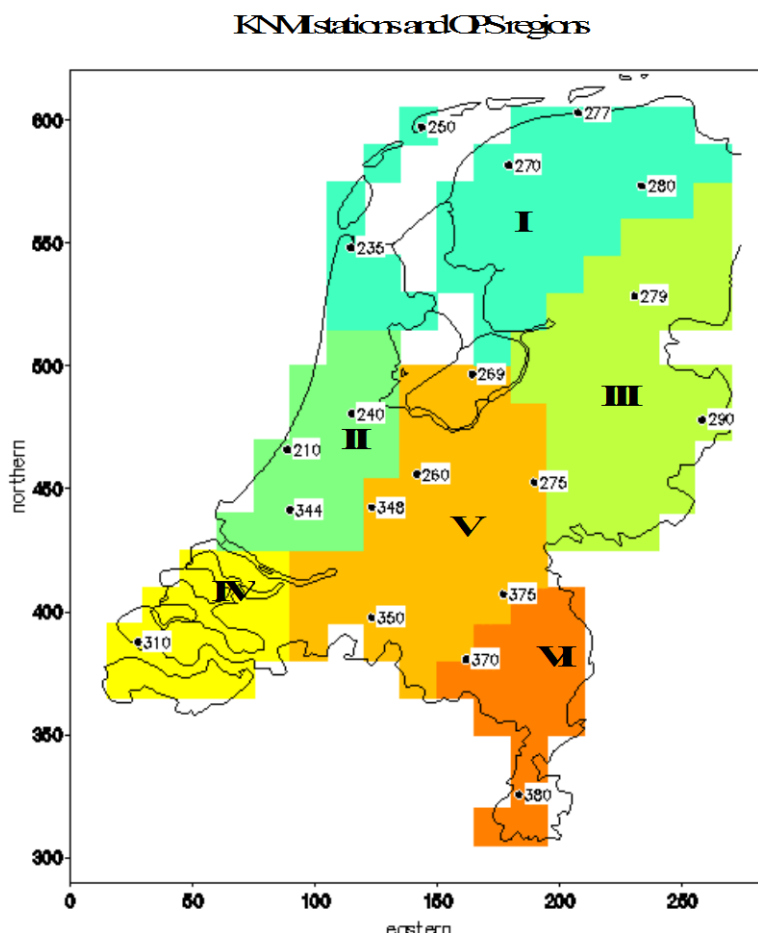


Figure 2.1. OPS meteorological districts (on a 10 x 10 km<sup>2</sup> grid) and location of KNMI stations.



All meteorological pre-processing is done individually for the six districts and saved separately. A schematic overview of this procedure is given in Figure 2.2. After this processing of the primary data a stage follows, in which secondary parameters are calculated and a climatology of similar situations (classes) is generated.

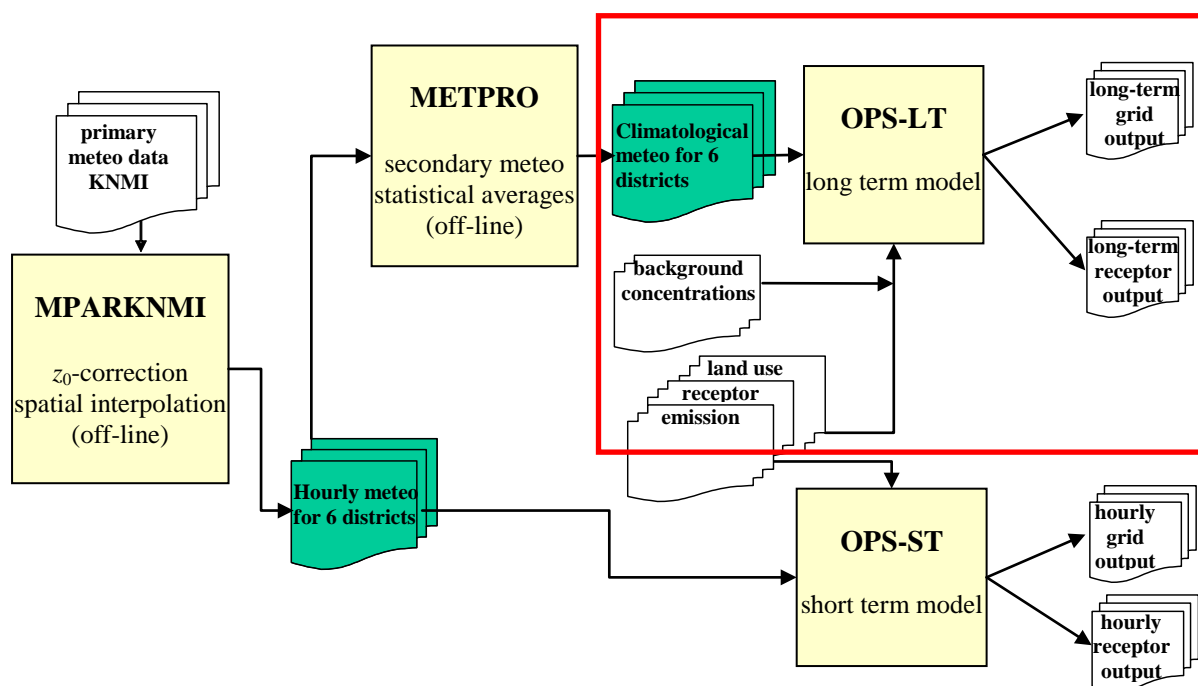


Figure 2.2 Schematic view of the long term and short term OPS models with its pre-processing steps by the programs MPARKNMI and METPRO. Note that most users will only use the OPS-LT part in the red box.

When the OPS model is run, climatological data are loaded from six files, representing six districts. The OPS model interpolates data of three nearest districts, nearest to a receptor, to avoid discontinuities in output.

The purpose of this chapter is to describe the meteorological data and the procedures used to obtain representative values for the different districts.

## 2.2 Sources of primary meteorological data

Currently, all necessary meteorological input data is obtained from the KNMI. The positions of the selected KNMI meteorological stations are given in Figure 2.1. Detailed information on these stations can be found in appendix 0.

Till 1993, meteorological input data was obtained from the National Air Quality Monitoring Network (LML) database. Between 1976 and 1981, this was mainly wind data measured in the LML network consisting of 46 sites, of which 5 were situated at the top of TV towers. In 1981, the database was expanded with data from the KNMI network on global radiation (7 –17 sites), temperature (14 sites) and precipitation data (11-14 sites). The LML meteorological observations stopped in 1993. From this point on, wind data was also obtained from observations at KNMI stations. Historical wind data, going back to 1981, were obtained from the KNMI archives and also included in the LML database. In this way a homogeneous series of data became available.

## 2.3 Processing primary data (MPARKNMI)

The primary meteo-preprocessor MPARKNMI reads primary observed meteo data (Table 2.1), applies a roughness and height correction for wind speeds, using roughness lengths for each meteorological station, representative for 12 wind sectors of 30°. Then, a spatial interpolation technique is applied, to compute the spatially averaged meteorological parameters that are listed in Table 2.2. The averaged parameter is either representative for a "local" scale or a "regional" scale.

The "local" area is defined by the area in which the model is intended to describe the concentration and/or deposition. The local data can be the data of a single station or derived from observations of more stations. In the latter case a representative value has to be determined from the different observations. In general, the local scale is an area with transport length < 50 km.

A "regional" area is a larger area, in principle the whole area from which emissions can influence the air pollution concentration in the local area. For the Netherlands, for example, the regional wind direction is taken as the wind velocity weighted average wind direction of stations over the whole country. Other parameters, such as regional precipitation amount, can simply be obtained by arithmetic averaging of observations in a large area. The regional scale is an area with transport length > 50 km.

If OPS is applied to compute nation-wide concentrations and depositions in the Netherlands, both scales are used: the local scale to define properties at the receptor site, the regional scale to define averaged properties for a trajectory. In this set-up, the local scale parameters are retrieved from the 6 OPS meteo districts, whereas NL averages are used as regional scale parameters.

With respect to certain parameters a single averaged value is used for the whole of the Netherlands (see Table 2.2); the main reasons for computing only one value (and not 6 district values) are the following:

- the spatial distribution of the parameter is not very important for the OPS model
- the interpolation to OPS meteo districts is not representative (too much data loss), because few stations are measuring that parameter.

*Table 2.1 Meteorological parameters and their specifications as input of MPARKNMI. obs. means observation height of KNMI meteo stations.*

Parameter	height	Units
temperature	obs.	°C
wind speed	obs.	m/s
wind direction	obs.	degrees
wind speed	200 m	m/s
wind direction	200 m	degrees
global radiation	obs.	J/cm2
precipitation duration	obs.	0.1 h
precipitation intensity	obs.	mm/h
relative humidity	obs.	%

*Table 2.2 Meteorological parameters and their specifications as output of MPARKNMI. Formats for data derived from hourly KNMI observations.*

	Parameter	Scale <sup>(3)</sup>	Observation height	Units	Format	No data value	required
	<u>once a day</u> :						
<i>a</i>	date (local time) <sup>(2)</sup>			yymmdd	3i2.2		y
<i>b</i>	snow cover indicator	NL		0=no 1=yes	i2	8	n
<i>c</i>	length of rain events	NL		0.1 h	i4	-88	n
<i>d</i>	precipitation intensity <sup>(7)</sup>	NL		0.1 mm/h	i4	-88	n
<i>e</i>	precipitation intensity <sup>(7)</sup>	local		0.1 mm/h	i4	-88	n
	<u>every hour</u> :						
<i>f</i>	global radiation	NL	1.5 m	J/cm <sup>2</sup> /h	i4	-88	y
<i>g</i>	temperature	NL	1.5 m	0.1 °C	i5	-880	y
<i>h</i>	precipitation duration <sup>(6)</sup>	NL	1.5 m	0.01 h	i4	-88	y
<i>i</i>	precipitation duration <sup>(6)</sup>	local	1.5 m	0.01 h	i4	-88	y
<i>j</i>	wind direction	NL	200 m <sup>(1)</sup>	degrees	i4	-88	n
<i>k</i>	wind velocity <sup>(4)</sup>	NL	200 m <sup>(1)</sup>	0.1 m/s	i4	-88	n
<i>l</i>	wind direction	NL	10 m	degrees	i4	-88	y <sup>(5)</sup>
<i>m</i>	wind velocity <sup>(4)</sup>	NL	10 m	0.1 m/s	i4	-88	y <sup>(5)</sup>
<i>n</i>	wind direction	local	10 m	degrees	i4	-88	n <sup>(5)</sup>
<i>o</i>	wind velocity <sup>(4)</sup>	local	10 m	0.1 m/s	i4	-88	n <sup>(5)</sup>
<i>p</i>	relative humidity	NL	1.5 m	%	i4	-88	n

<sup>(1)</sup> 200 m or at a level to be specified

<sup>(2)</sup> Solar noon is expected to be at 13:00 h

<sup>(3)</sup> local: average of an OPS meteo district; NL: average of the Netherlands

<sup>(4)</sup> wind velocity converted to a standard roughness length of 0.03 m

<sup>(5)</sup> either local (district) or NL data must be available

<sup>(6)</sup> precipitation duration per hour in 0.01 h = precipitation probability in %

<sup>(7)</sup> daily averaged precipitation intensity = (amount of rain) / (time during which it rained) [0.1 mm/h]

An overview of MPARKNMI is shown in Figure 2.3.

### MPARKNMI

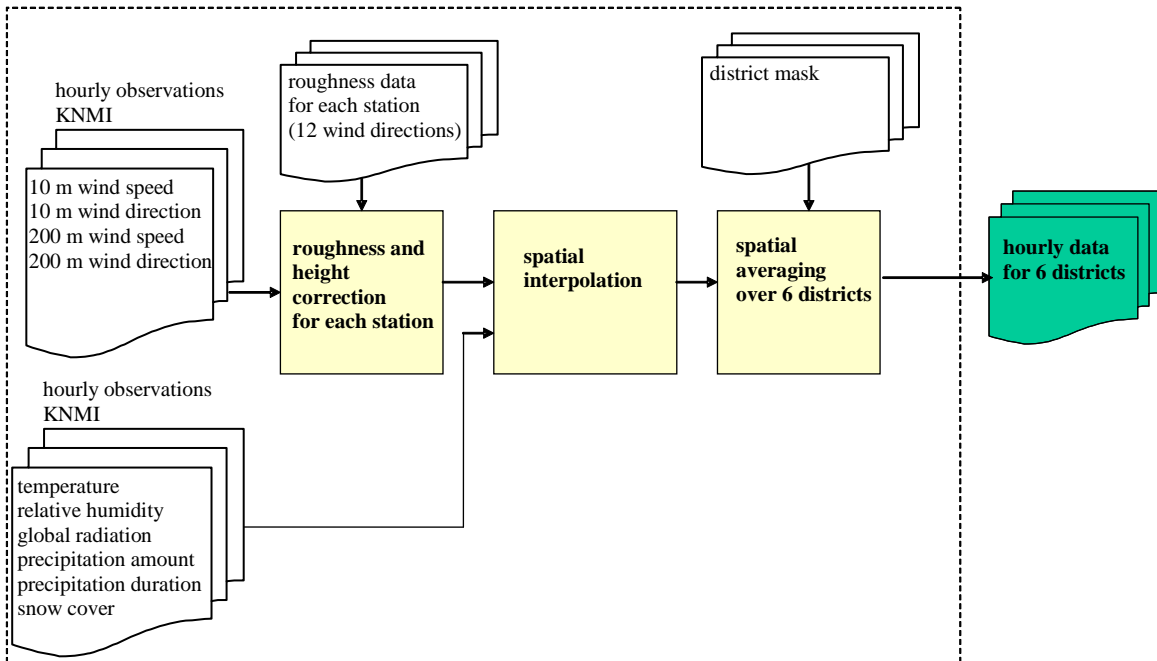


Figure 2.3 Processing of primary meteorological data by MPARKNMI.

## 2.3.1 Calculating the potential wind speed

The OPS model uses spatially averaged meteorological data rather than point data. Before any form of spatial averaging can take place, it is necessary that all wind data is converted to standard conditions. Not all stations have the same measuring height. Moreover, the terrain conditions are not the same for all the stations. Therefore, wind velocities are converted to a potential wind speed, defined as the wind at 10 m height and at a roughness length of 0.03 m, according to the method described in section 2.4.5.1. Because the roughness length is not the same in all wind directions, conversion is applied as a function of wind direction.

## 2.3.2 Spatial averaging of meteorological data

The spatial averaging method chosen here is first interpolating the data over the Netherlands, using all the available stations (see Figure 2.1 and Table 2.6) and then calculating district averages. In this way, the data are optimally used and the information of nearby stations is used automatically, if local stations fail. In earlier approaches, a number of stations were selected to be representative for an OPS meteo district. The major drawback of such a method is that, if data sets change, one has to make new selections with the risk of changing trends in the district. Also, the chance that for a given hour none of the selected stations will provide valid information is high, resulting in a high percentage of missing data.

Parameters are interpolated using a 10 × 10 km grid over the Netherlands. Given a set of  $N$  observations, the resulting parameter value for a grid cell  $(k, l)$  of the grid is:

$$x_{kl} = \frac{\sum_{i=1}^N w(i) x(i)}{\sum_{i=1}^N w(i)}, \quad (2.1)$$

with  $x(i)$ : parameter value at station  $i$  and  $w(i)$ : weighing factor for station  $i$ , depending on the distance  $r$  between the grid point and the position of the measuring station according to:

$$w(i) = \exp\left[\frac{-r}{r_{rep}}\right], \quad (2.2)$$

Here,  $r_{rep}$  is an interpolation distance which, considering the mean distance between the stations, is fixed at 10 km.

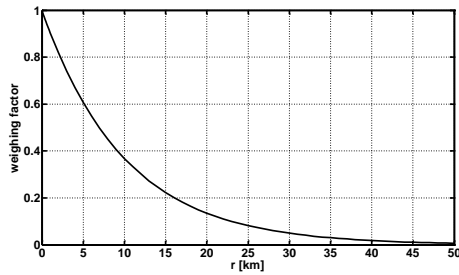


Figure 2.4 Weighing factor as function of distance  $r$ .

If the contribution of each station to each grid point has been calculated, then the parameters are spatially averaged to district averages by using a mask according to Figure 2.1.

### 2.3.2.1 Wind direction

The potential wind speed  $\underline{u}$  in combination with the wind direction is split into an  $u_x$  and  $u_y$  vector and district averages are computed as above for  $u_x$  and  $u_y$ . The resulting wind direction per district is simply calculated by taking the arctangent of the vectors. If the observations indicate a variable wind direction, the observation is ignored. In such a case, the remaining stations determine the direction of the wind in the district.

### 2.3.2.2 Wind speed

Spatial averaging of wind speed is done using the same interpolation procedure. Considering the use of wind speed in the model (mainly to derive turbulence parameters), the interpolation is independent of wind direction. The minimum wind speed of individual observations is set at 0.5 m/s. This takes the trigger threshold of the anemometers used into account (in the order of 0.4 m/s) to some extent, and also the fact that wind speed is given in 1 m/s units (before July 1996, wind speeds were specified in knots  $\approx 0.5$  m/s). Ignoring situations with zero wind speed would introduce a bias in the ‘average’ wind speed, and therefore will lead to larger errors in modelling than using lower limit values.

### 2.3.2.3 Other parameters

Interpolation of global radiation, temperature, relative humidity, precipitation duration and precipitation intensity is carried out in the same way as for wind speed. The length of rain events and snow cover are not spatially interpolated, but apply always for the Netherlands as a whole.

## 2.3.3 Calculation of precipitation characteristics

Precipitation events in the OPS model are described with three parameters:

1. precipitation probability

2. precipitation intensity
3. the average length of a rain event.

In terms of input data for OPS, precipitation probability is required on an hourly basis, while intensity and length of rain event are required as representative values on a daily basis. The KNMI data provide - for each hour - the amount of precipitation and the duration within that hour.

- The hourly precipitation probability (in %) is taken equal to the precipitation duration per hour in 0.01 h.
- The average precipitation intensity for a day is computed as (total amount of rain during a day) / (time during which it rained during a day).
- The average length of a rain event requires a definition of what is considered as a contiguous rain event and what is not. A rain event starts in the first hour in which the precipitation duration is larger than zero and ends if the precipitation duration is zero in a subsequent hour. The length of this event is calculated as the sum of the durations between the starting hour and the ending hour. The average length of a rain event is then calculated as the sum of the lengths of all rain events that end on a certain day divided by the number of rain events that end during that day. This means that precipitation periods that have not yet ended, but continue on the next day, contribute to the average length of a rain event of the next day. A single daily and spatially averaged value is calculated from all the stations that reported precipitation that day.

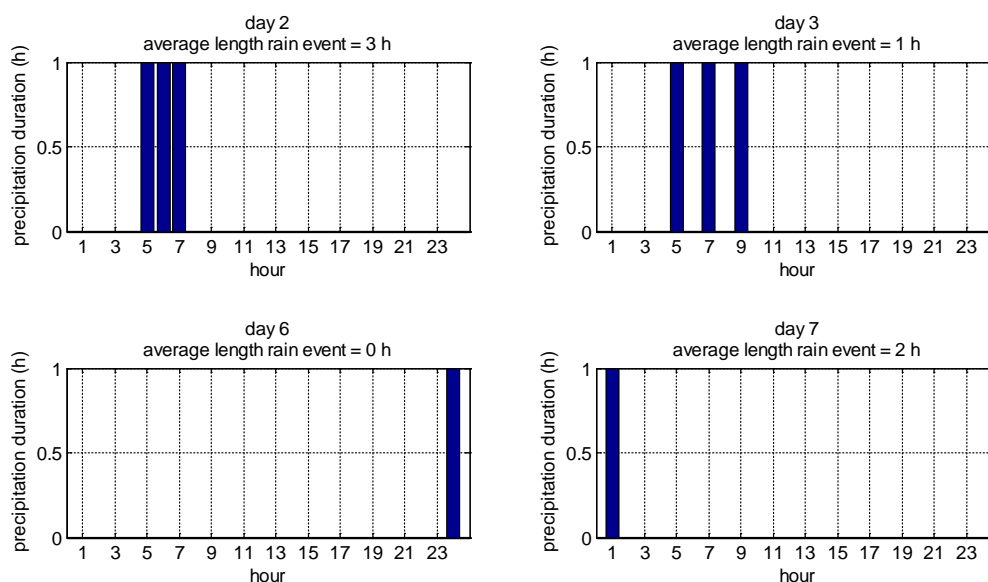


Figure 2.5 Average length of rain event = 3h, for contiguous 3-hour rain (upper left); = 1 h, for 3 separate 1-hour rain events (upper right); = 0h, for a rain event which extends to the next day (lower left); = 2 h, for two hour rain extending over two days (lower right).

### 2.3.4 Determination of the snow cover indicator

The presence of a snow cover is important for the calculation of dry deposition velocities in the model. If the Netherlands and a large part of Europe are covered with snow, the dry deposition will decrease dramatically and the long-range transport of pollutant may increase sharply. As such, the model focuses on the large-scale effects of snow cover and not on the local scale. The input to the model is therefore an indicator of whether most of the Netherlands (and probably Western Europe) is covered with snow or not. The height of a snow layer is reported by 3-7 stations on a daily basis (see Table 2.7). The snow indicator is set at 1, if at least 80% of these stations report the presence of a snow layer. From 2003 onwards, there are no snow cover data available in the LML database and OPS will overestimate the deposition during large scale snow periods, especially for water soluble species.

## 2.4 The meteorological pre-processor (METPRO)

The task of the pre-processor METPRO is to calculate secondary meteorological parameters, construct backward trajectories, divide these trajectories into classes and calculate representative averages for a number of parameters. Trajectory distance classes account for the time difference between source and receptor; f. ex. for a distance of 1000 km, there may be several days between the meteorological situation at the source and that at the receptor. METPRO averages meteorological parameters for these distance classes, meaning that averaging takes place over time (over all hours that the plume travels between source and receptor), not over the actual space where the trajectory lies.

The mixing height classes in OPS ('low' and 'high' mixing height) do not contain a single fixed value for the mixing height, but contain averages derived from the actual hourly values in the selected simulation period. This approach ensures a non-critical choice of class boundaries. The main processes in METPRO are shown in Figure 2.6.

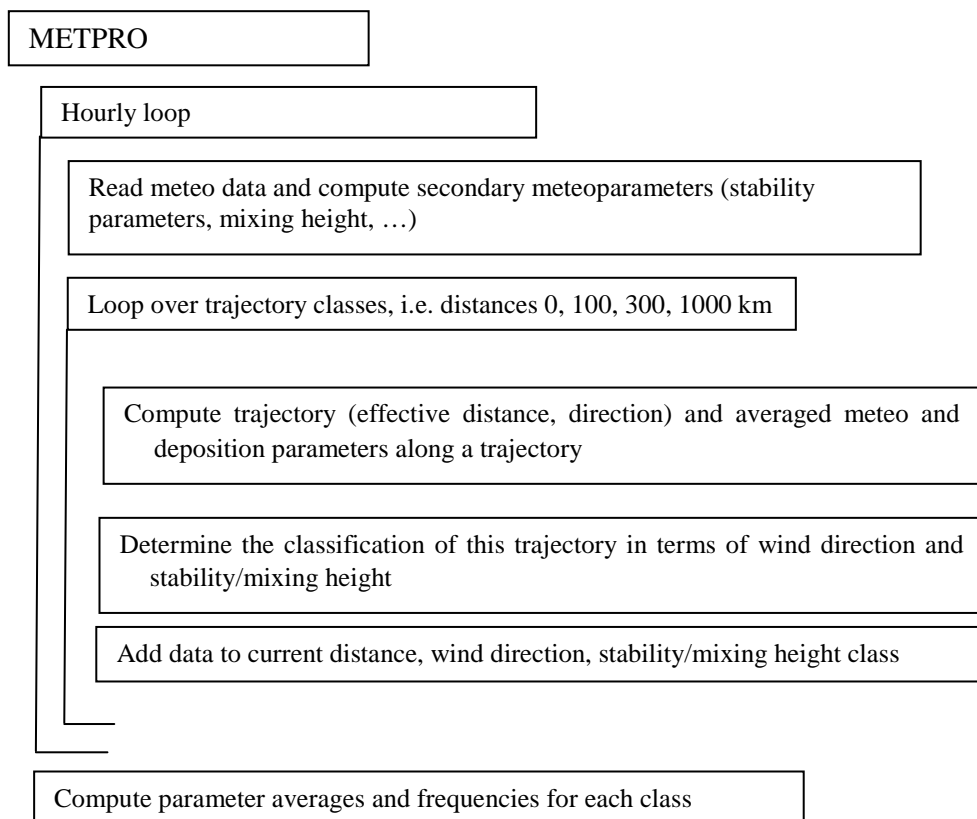


Figure 2.6 Flow chart of meteo preprocessor METPRO.

### 2.4.1 Cloud cover

We follow the procedure from Holtslag and van Ulden (1983b). During daytime, the solar elevation  $\varphi$  is computed, depending on the latitude of the location; in OPS the location of De Bilt (latitude  $52^\circ$ ) is used. Then the global radiation for cloudless skies [ $\text{W/m}^2$ ] is computed according to Kasten and Czeplak (1980) and Collier and Lockwood (1974, 1975):

$$Q_{\text{clear sky}} = a_1 \sin(\varphi) + a_2, \quad (2.3)$$

with

$Q_{\text{clear sky}}$ : clear sky radiation [ $\text{W/m}^2$ ]

$a_1$  and  $a_2$  empirical constants,  $a_1 = 1041 \text{ W/m}^2$ ,  $a_2 = -69 \text{ W/m}^2$ .

Kasten and Czeplak (1980) give a relation between the measured radiation  $Q_{measured} [\text{W/m}^2]$  and the clear sky radiation as function of cloud cover  $N [-]$ :

$$Q_{measured} = Q_{clear\ sky} (1 + b_1 N^{b_2}), \quad (2.4)$$

with

$b_1 = -0.75$ ,  $b_2 = 3.4$  empirical coefficients. From this we can compute the cloud cover:

$$N = \left[ \frac{1}{b_1} \left( \frac{Q_{measured}}{Q_{clear\ sky}} - 1 \right) \right]^{\frac{1}{b_2}}. \quad (2.5)$$

During night time, a cloud cover is used equal to  $0.9 \times$  cloud cover of two hours before dusk, assuming that we have fewer clouds in the night than before dusk. We do not want to use the cloud cover of 1 hour before dusk, since at dusk measurements of global radiation may be very low and unreliable.

Cloud cover is an input for the scheme of Beljaars and Holtslag, described in the next section.

## 2.4.2 Derivation of boundary layer parameters

The calculation scheme of Beljaars and Holtslag (1990) is used for the estimation of boundary layer parameters such as surface heat flux, friction velocity and Monin-Obukhov length. Most of the routines in this scheme are based on a parameterization of day and night-time surface energy budgets as published by Holtslag and Van Ulden (1983a); Van Ulden and Holtslag (1985) and Holtslag and De Bruin (1988).

The Monin-Obukhov length  $L$  [m] is a vertical length scale, which has become very popular in estimating the stability of the atmosphere.  $-L$  reflects the height to which friction forces are dominant over buoyant forces. The surface heat flux,  $H_0$  [ $\text{W m}^{-2}$ ], is the vertical flux of sensible heat that is transferred by turbulence to or from the surface. This parameter determines the heating or the cooling of the lower part of the boundary layer and therefore indirectly affects the depth of the boundary layer. The friction velocity  $u_*$  [m/s] determines the production of turbulent kinetic energy at the surface. The relation between  $L$ ,  $H_0$  and  $u_*$  is given by:

$$L = - \frac{T \rho_a c_p u_*^3}{g H_0 \kappa}, \quad (2.6)$$

where  $\kappa [-]$  is the von Kármán constant, established experimentally to be about 0.40,  $T$  the absolute temperature [K],  $g$  the acceleration of gravity [ $\text{m s}^{-2}$ ],  $c_p$  the specific heat of air [ $\text{J kg}^{-1} \text{K}^{-1}$ ], and  $\rho_a$  the air density [ $\text{kg m}^{-3}$ ].  $H_0$  can be calculated from the net radiation  $Q^*$  [ $\text{W m}^{-2}$ ] using the surface energy budget:

$$H_0 + LE = Q^* - G_s, \quad (2.7)$$

where  $LE$  is the latent heat flux and  $G_s$  the soil heat flux. The latent heat flux is modelled by De Bruin and Holtslag (1982), and Holtslag and De Bruin (1988), using a modified Priestly-Taylor model. This model is used in the routines of Beljaars and Holtslag (1990), where  $H_0$  for a given geographical position is parameterized as a function of global radiation or cloud cover. Results of these surface energy parameterizations have been verified with experiments at the Cabauw meteorological tower. The basic equation which, according to surface-layer similarity theory, relates  $u_*$  to a vertical wind speed profile  $u(z)$  is:

$$u_* = \frac{\kappa u(z)}{\ln\left(\frac{z}{z_0}\right) - \psi_m\left(\frac{z}{L}\right) + \psi_m\left(\frac{z_0}{L}\right)}, \quad (2.8)$$



where  $z$  is an arbitrary height in the surface layer,  $z_0$  the surface layer roughness length of the terrain (for a classification, see Wieringa (1981)). The functions  $\psi_m$ , are stability correction functions for momentum, which read as follows (Paulson 1970, Holtslag 1984):

for  $z/L < 0$ :

$$\psi_m\left(\frac{z}{L}\right) = 2 \ln\left(\frac{1+x}{2}\right) + \ln\left(\frac{1+x^2}{2}\right) - 2 \arctan(x) + \frac{\pi}{2} \quad (2.9)$$

with  $x = \left(1 - 16 \frac{z}{L}\right)^{1/4}$

for  $z/L > 200$ :

$$\psi_m\left(\frac{z}{L}\right) = -0.7 \frac{z}{L} - 10.72 \quad (2.10)$$

for  $0 \leq z/L \leq 200$ :

$$\psi_m\left(\frac{z}{L}\right) = -0.7 \frac{z}{L} - (0.75 \frac{z}{L} - 10.72) \cdot \exp(0.35 \frac{z}{L}) - 10.72. \quad (2.11)$$

Equations (2.6)-(2.11) are iteratively solved to obtain  $u_*$  and  $L$  (Beljaars and Holtslag, 1990). The following minimal values are imposed:  $|L| = 5$  m,  $u_* = 0.04$  m/s.

From Eq. (2.8) relations can be derived for wind speed profile calculations or for the translation of wind speed observations to situations with different  $z_0$ . In section 2.4.5 more details on the wind speed profile and stability correction functions are given.

### 2.4.3 Pasquill classes

Pasquill (1961) categorised the amount of atmospheric turbulence in 6 classes, ranging from A (strongly unstable) to F (strongly stable). In the OPS-model other measures of atmospheric turbulence are used; however Pasquill classes are still used in OPS, but only for two purposes:

- for the computation of the turning of the wind with height (here we use the eddy diffusivity  $K_m$ , see section 2.4.5.3)
- for the plume rise that is used in computing effective dry deposition velocities (see eq. 2.25).

The Pasquill class is determined as a function of the inverse Monin-Obukhov length  $1/L$  and the roughness length  $z_0$ , according to Golder (1972), see Figure 2.7.

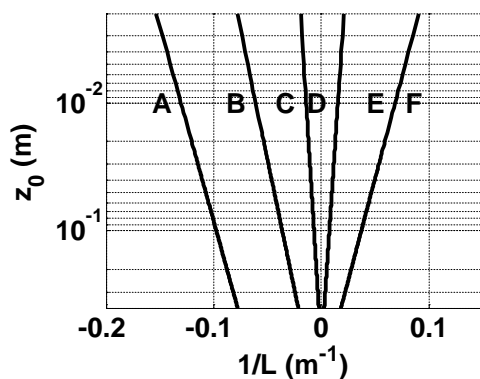


Figure 2.7 Pasquill classes as function of roughness length  $z_0$  and Monin-Obukhov length  $L$ , according to Golder (1972).

Table 2.3 Pasquill classes and corresponding Monin-Obukhov length  $L$  [m] and eddy diffusivity of the boundary layer  $K_m$  [ $\text{m}^2/\text{s}$ ]

Pasquill class	characterisation	range of $L$ for $z_0 = 0.1$ m	$K_m$ [ $\text{m}^2/\text{s}$ ]
A	strongly unstable	[-10, 0]	50
B	unstable	[-28, -10]	40
C	weakly unstable	[-147, -28]	30
D	neutral	$[-\infty, -147]$ , $[135, \infty]$	10
E	stable	[27, 135]	3
F	strongly stable	[0, 27]	1

The following adaptations have been implemented in order to remain more closely to the classification of the Dutch National model (TNO, 1976):

$$\begin{aligned}
 Q^* &\leq 0 \text{ W/m}^2, \text{ A-D} && \rightarrow \text{D} \\
 Q^* &> 0 \text{ W/m}^2, \text{ E-F} && \rightarrow \text{D} \\
 N &> \text{‰} && \rightarrow \text{D} \\
 \text{E-F, } v &> 3 \text{ m/s, } N > \text{‰} && \rightarrow \text{D} \\
 Q^* &\leq 0 \text{ W/m}^2, 2 \text{ m/s} < v \leq 3 \text{ m/s, } \text{‰} < N < \text{‰} && \rightarrow \text{E.}
 \end{aligned}$$

## 2.4.4 Estimation of mixing heights

Although it was possible, in principle, to use temperature profiles from radio soundings for the determination of the mixing layer height, estimation of the mixing height on the basis of surface-layer parameters was preferred. The main reason for this is that the inversion height is usually taken at the height of the dominant temperature jump in the profile, so is valid for ‘aged’ pollutants, while this model needs the height of the first layer starting at the surface that effectively isolates the surface layer from higher parts of the boundary layer. Moreover, temperature profiles from radio soundings have a limited resolution in the lower boundary layer (Driedonks, 1981).

### 2.4.4.1 Stable and neutral conditions

Strictly speaking, the nocturnal boundary-layer height is not stationary (Nieuwstadt, 1981). Proposed prognostic models usually take the form of a relaxation process, in which the actual boundary-layer height approaches a diagnostically determined equilibrium value. It turns out that the time scale of the relaxation process is very large and therefore the equilibrium value can be used as an estimator for the actual boundary-layer depth (Nieuwstadt, 1984). For this reason the direct applicability of diagnostic relationships was evaluated. A simple diagnostic relation of the form:

$$z_i = c_1 \frac{u^*}{f_c}, \quad (2.12)$$

as first proposed by Delage (1974), was found to give satisfactory results for both stable and neutral atmospheric conditions. In this equation  $f_c$  is the Coriolis parameter and  $c_1$  a proportionality coefficient. From the data set of night-time acoustic sounder observations at Cabauw (Nieuwstadt, 1981),  $c_1$  was estimated at 0.08. Equation (2.12) was also tested using acoustic sounder observations carried out at Bilthoven in 1981 during daytime. Values for  $c_1$  found were 0.086 during neutral atmospheric conditions and 0.092 for neutral + stable cases. For the present model Eq. (2.12) is adopted, with  $c_1 = 0.092$  for both neutral and stable cases.

### 2.4.4.2 Unstable conditions

Adequate diagnostic equations do not exist for the depth of the unstable atmospheric boundary layer (Van Ulden and Holtslag, 1985). It is common practice to use rate equations (Tennekes, 1973; Stull, 1983) for describing the rise of an inversion by buoyancy as well as by mechanical forces. The model adopted here is based on the model of Tennekes (1973) and describes the growth of the convective boundary layer for a rather idealized situation. More details on this approach are given in Van Jaarsveld (1995). In Figure 2.8, model results and observations are compared as a function of time of the day for the ten-day data set of Driedonks (1981). Indeed, no systematic difference is observed in the average course of the mixed-layer height in the morning. Considering the way mixed-layer heights are used in the OPS model, namely, as averages for typical situations, one can conclude the current approach to lead to the desired results.

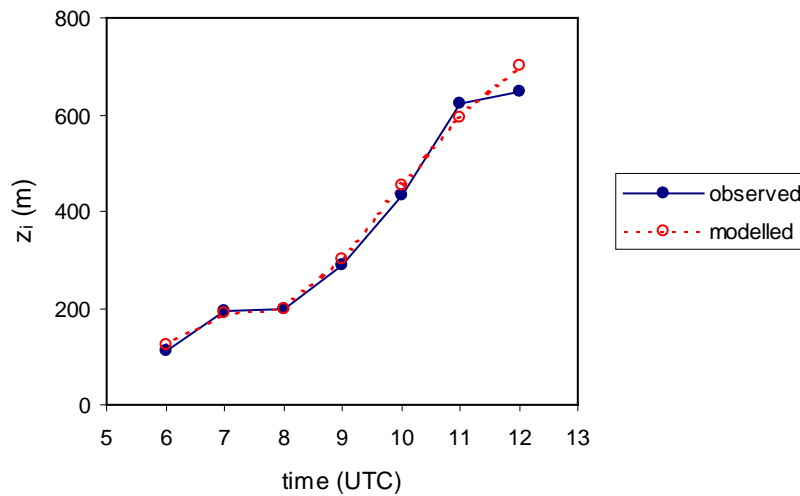


Figure 2.8 Comparison of modelled and observed mixing-layer heights (average of ten convective days) at Cabauw.

### 2.4.5 The wind profile

Pollutants are emitted at various heights in the atmosphere. Moreover, due to turbulent mixing, the effective transport height of a pollutant may change in time. Wind speed data are usually available for one or two discrete observation levels. What is needed for the description of dispersion and transport of pollutants is a relation between wind speeds at different heights. It is common practice to base this relation for the lower boundary layer on Monin-Obukhov similarity theory. The following general expression for the wind speed at height  $z$  can be derived from Eq. (2.8):

$$u(z) = u(z_1) \frac{\left[ \ln\left(\frac{z}{z_0}\right) - \psi_m\left(\frac{z}{L}\right) + \psi_m\left(\frac{z_0}{L}\right) \right]}{\left[ \ln\left(\frac{z_1}{z_0}\right) - \psi_m\left(\frac{z_1}{L}\right) + \psi_m\left(\frac{z_0}{L}\right) \right]}, \quad (2.13)$$

where  $z_1$  is the height at which a wind observation is available. The functions  $\psi_m$  given by Eq. (2.9) - (2.11) are, strictly speaking, only valid for the surface layer ( $z_0 \ll z < |L|$ ). However, several authors have derived correction functions describing the wind speed relation up to the top of the mixing layer (Carson and Richards, 1978; Garratt *et al.*, 1982; Holtslag, 1984; Van Ulden and Holtslag, 1985). A function which in combination with Eq. (2.13) fits the wind speed observations at the Cabauw tower in stable situations up to 200 m well, is (Holtslag, 1984):

$$\psi_m\left(\frac{z}{L}\right) = 2 \ln\left(\frac{1+x}{2}\right) + \ln\left(\frac{1+x^2}{2}\right) - 2 \arctan(x) + \frac{\pi}{2}, \quad L \leq 0 \quad (2.14)$$

$$\text{with } x = \left(1 - 15 \frac{z}{L}\right)^{1/4},$$

$$\psi_m\left(\frac{z}{L}\right) = -17 \left[1 - \exp\left(-0.29 \frac{z}{L}\right)\right], \quad L > 0. \quad (2.15)$$

This function is used in the model instead of Eq. (2.9) – (2.11) in computing the wind profile, where it should be noted that for  $L \leq 0$ , the terms  $\psi_m(z_0/L)$ , present in Eq. (2.8), have been dropped because they are comparatively small.

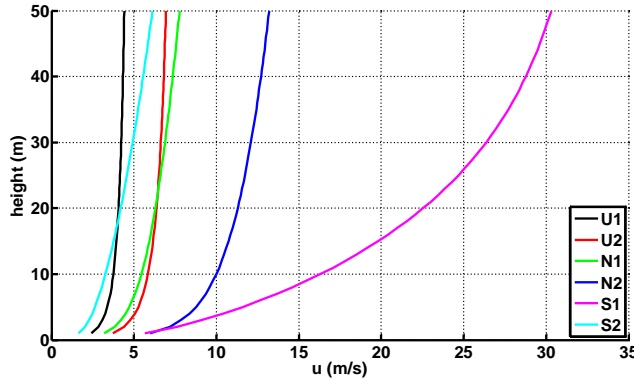


Figure 2.9 Vertical wind profile computed with eq. 2.8 for the stability/mixing height classes used in OPS. Values of  $u^*$ ,  $L$  are from Table 2.5,  $z_0 = 0.03$  m.

#### 2.4.5.1 Combining wind observations

An expression similar to Eq. (2.13) can be derived from (2.8) to translate  $u(z; z_0)$  measured at measuring height  $z$  at a location with roughness  $z_0$  to a potential wind speed  $u(z_1; z_0'')$  at a reference level  $z_1$  ( $= 10$  m) representative for a reference  $z_0'' = 0.03$  m. The procedure is to convert  $u(z; z_0)$  to  $u(z_2; z_0)$  ( $z_2$  taken 60 m) and then to convert  $u(z_2; z_0) = u(z_2; z_0)$  to  $u(z_1; z_0'')$ . The assumption in this is that the wind speed at height  $z_2$  is not influenced by the local surface roughness.

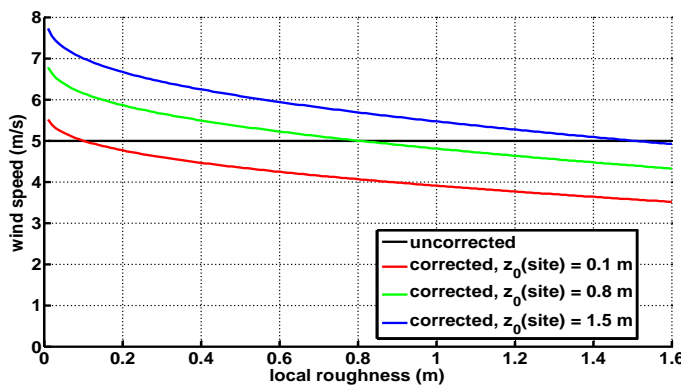


Figure 2.10 Roughness length correction for wind speed, assuming a wind speed of 5 m/s, for three different roughness lengths at the observation site.

This procedure is carried out for each of the observation sites. Roughness lengths for each of the KNMI meteorological sites have been determined by Erisman (1990), using a relation between  $z_0$  and the (short-term) standard deviation of wind directions given by Hanna (1981).

A representative wind speed for a district is calculated in the pre-processor by first normalizing the wind speeds at the different observational sites on the basis of an area-representative roughness length, and then averaging the roughness corrected wind speeds. A representative wind direction follows from the combined  $x$  and  $y$  components of the roughness-corrected wind vectors.

#### 2.4.5.2 Observed wind speed profiles

Although the logarithmic profile appears to fit observations well, it is used in the present model mainly for extrapolation to levels lower than the observation height (10 m). For the description of (horizontally averaged) transport velocities at different heights (up to 300 m) a relation of the form:

$$u(z) = u(z_I) \left( \frac{z}{z_I} \right)^p, \quad (2.16)$$

known as the power law, is used. The major advantage of this relation is that it can be easily fitted to observations. In the present case,  $p$  is derived hourly from the 10 m and 200 m observations at the Cabauw meteorological tower. The resulting  $p$  values range from 0.13 under unstable conditions ( $L > -30$  m) to 0.45 under very stable conditions ( $L < 35$  m).

#### 2.4.5.3 Turning of the wind with height

The direction of the wind as a function of height is important for the description of pollutant transport especially if this is done on the basis of surface-based observations. The turning of the wind in the 20 - 200 m layer was studied by Holtslag (1984) and Van Ulden and Holtslag (1985) on the basis of observations at the Cabauw tower. The latter authors give an empirical relation for  $A(z)$ , the turning angle at height  $z$  relative to the surface wind direction, up to 200 m:

$$A(z) = c_6 A(z_{ref}) \left[ 1 - \exp \left( -c_7 \frac{z}{z_{ref}} \right) \right], \quad (2.17)$$

where  $A(z_{ref})$  is the turning angle at reference height  $z_{ref}$ ;  $c_7 = 1.0$  is an empirical coefficient,  $c_6$  is chosen such that for  $z = z_{ref}$ ,  $A(z) = A(z_{ref})$  or  $c_6 = 1/(1 - \exp(-c_7)) = 1.58$ . METPRO provides values of  $A(z_{ref})$ , based on measurements at the Cabauw tower in the period 1990 – 1996. Typical values of  $A(z_{ref})$  at  $z_{ref} = 200$  m are 35, 12 and 9 degrees for stable, neutral and unstable situations, respectively.


In METPRO, a trajectory is characterized by a single direction representative for mass flow of the pollutant. This direction is taken at a height equal to half of the maximum mixing height (100-2000 m) of the trajectory. The turning angle above the 150 – 300 m layer is not known from actual observations. On the assumption that the winds become geostrophic at some level above the observation height, an analytical description of the spiral given by Businger (1982) is used:

$$U_g = G \left[ 1 - \exp(-a_E z) \cos(a_E z) \right] \quad (2.18)$$

$$V_g = G \left[ \exp(-a_E z) \sin(a_E z) \right], \text{ with } a_E = \sqrt{\frac{f_c}{2K_m}}, \quad (2.19)$$

where  $K_m$  is the (bulk) eddy diffusivity of the boundary layer and  $U_g$  and  $V_g$  the respective velocity vectors in the  $x$  and  $y$  directions, with the  $x$ -axis aligned with the geostrophic wind  $G$ . From Eqs. (2.18) and (2.19) the following expression has been derived for the turning angle  $A_E(z)$  of the wind at height  $z$  relative to the geostrophic wind direction:

$$A_E(z) = \arctan \left[ \frac{-\exp(-a_E z) \sin(a_E z)}{1 - \exp(-a_E z) \cos(a_E z)} \right]. \quad (2.20)$$

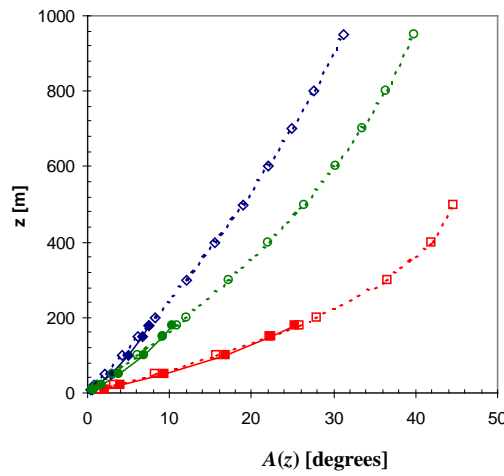

**Figure 2.11** Turning of the wind direction with height (Ekman spiral) as a function of height for different stability regimes;  $A(z)$  = turning angle relative to the surface wind direction (Eq. 2.20). Results, up to 200 m, obtained using the empirical relation of Van Ulden and Holtslag (Eq. 2.17) are also plotted (solid lines). Squares: stable conditions ( $K_m = 1.5 \text{ m}^2 \text{ s}^{-1}$ ;  $A(z_{ref}) = 27^\circ$ ). Circles: neutral conditions ( $K_m = 11 \text{ m}^2 \text{ s}^{-1}$ ;  $A(z_{ref}) = 11^\circ$ ). Diamonds: unstable conditions ( $K_m = 25 \text{ m}^2 \text{ s}^{-1}$ ;  $A(z_{ref}) = 8^\circ$ ).

Although the Ekman spiral and Eqs. (2.18) and (2.19) are defined for steady-state situations with small  $K_m$ , when using higher eddy diffusivity values, the resulting profiles do not appear to conflict with (mean) profiles, as observed in the lower part of the boundary layer. This is shown in Figure 2.11, where three profiles representative for stable, neutral and unstable conditions in the lower boundary layer are given, together with corresponding profiles, for the lower 200 m, calculated using Equation (2.17). Note that in this figure the turning angle  $A(z)$  is plotted relative to the surface wind direction ( $A(z) = A_E(z) - A_E(z=0)$ ) instead of relative to the geostrophic wind.

In the OPS model, the expression of Van Ulden and Holtslag (Eq. (2.17)) is used; for the computation of the trajectories in METPRO, Eq. (2.20) is used, with  $K_m$  values from Table 2.3.

## 2.4.6 Trajectories

Backward trajectories are constructed on the basis of hourly wind observations at TV towers. Since at this stage, the actual location of a receptor is not yet known, it is necessary to assume that transport directions and velocities representative for the Netherlands are also valid for a larger area at the same time. Although this is a crude assumption, it may still give satisfactory results for longer term average calculations. The main reason for this is that long-range transport is of importance in persistent situations and those with not too low transport velocities. In these situations, the observations in the Netherlands (five towers of heights between 146 and 320 m) may be expected to be representative for a much larger area.

The procedure is as follows (see Figure 1.4):

- observed data at the towers are combined into a single  $x$  and  $y$  wind vector pair representative for a height of 200 m using the methods described in section 2.4.5.
- Wind vectors and other parameters, such as mixing height, are stored for the previous 96 hours (four days).

- A trajectory is determined by tracing back the height corrected wind vectors, starting at the most recent hour with observations and going back in time, using wind vectors of previous hours in the process.
- The back tracking is stopped as a circle with a predefined radius (100, 300 or 1000 km) around the starting point is crossed.
- The wind vectors are height-corrected so as to present the representative height of the mass in the trajectory, which is taken at half the **maximum** mixing height encountered at that stage of transport. Since the maximum mixing height encountered is not known beforehand, an iterative procedure is employed, using updated height-corrected wind vectors, each iteration. This iteration stops if the trajectory does not change anymore.
- The start and end positions of this trajectory determine the direction  $\varphi$  of the trajectory. Other characteristic parameters are determined by appropriately averaging hourly observations along the trajectory.

Easterly directions seem to be systematically overpredicted by the method described here, while north-west directions are underpredicted. It is remarkable that for trajectories which fall fully within the observation area of the towers (e.g. 100 km), these discrepancies are also found (not shown here). Similar results were obtained by comparing these trajectories with 6-hourly 850 hPa trajectories provided by the Norwegian Meteorological Institute, although here a systematic deviation of  $\sim 20^\circ$  in transport direction is found. This can be explained by the Ekman spiral (the 850 hPa trajectories are approx. 1500 m above the surface). When corrected for this systematic difference, the standard deviation between the two is of the order of  $30^\circ$ .

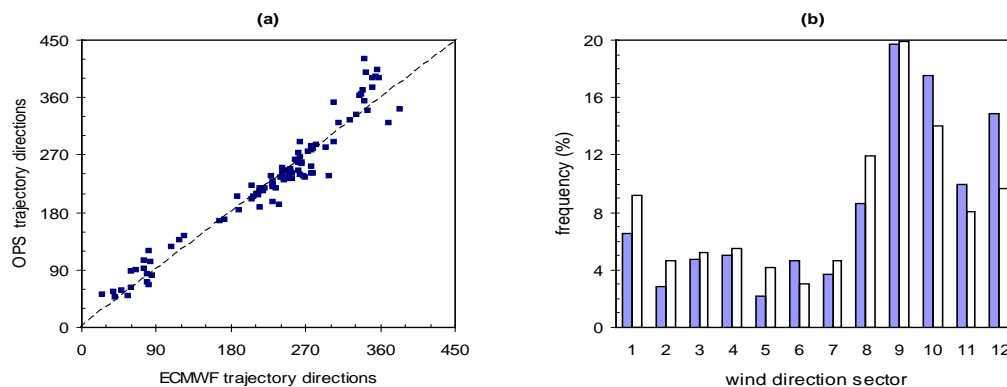


Figure 2.12 Source-receptor directions of backward trajectories derived from ECMWF wind fields versus trajectory directions derived from observations at five towers in the Netherlands. The source-receptor distance was taken as 1000 km. (a): Comparison of individual trajectories arriving at 12:00 UTC, excluding trajectories with  $fp_{eff} < 2$ . (b): All directions grouped into  $30^\circ$  sectors. Sector 1 represents  $345^\circ - 15^\circ$  (North). Solid bars: ECMWF trajectories. Open bars: OPS trajectories.

In Figure 2.12a, trajectory directions calculated in this way are compared to trajectory directions derived from  $3^\circ$  latitude  $\times$   $3^\circ$  longitude resolution wind fields (1000 and 850 hPa) obtained from ECMWF (De Waal and Van Pul, 1995). The latter trajectories are calculated for an average pressure level of 960 hPa (corresponding height above surface  $\sim 400$  m), considered as representative for the average height of transport in the mixing layer. There is hardly any systematic difference between the trajectory directions, as the total set of trajectories is compared. The standard deviation of the differences is of the order of  $30^\circ$  if some much curved trajectories are ignored ( $fp_{eff} < 2$ , see Eq. 1.1). If directions are grouped into direction classes, then the difference may appear fairly large, as is shown in Figure 2.12b for the full set of trajectories.

#### Temporal isolation of pollutants from the surface due to mixing-height variations

Due to the classification of trajectories, the properties of the trajectories have to be characterized by a few parameters. In terms of mixing volumes, trajectories are defined by an average transport velocity,

$u_{tra}$ , and the maximum mixing height,  $z_{i\ max}$ , which has appeared during transport. In reality the mixing height that an air parcel encounters on its way to the receptor point can be lower than this height. Moreover, the parcel may be transported above the mixing layer part of the time. In such a situation the pollution in the parcel is not removed by dry deposition, a process which only occurs at the surface.

Standard averaging of dry deposition velocities over a trajectory, gives us an average dry deposition velocity

$$\bar{v}_{d\ tra} = \frac{1}{N} \sum_{t=1}^N v_d(t), \quad (2.21)$$

where  $N$  is the number of (hourly) intervals and  $v_d(t)$  the dry deposition velocity at time  $t$ . To account for the effects described above, 'effective' dry deposition velocities ( $\tilde{v}_{d\ tra}$ ) are introduced, which account for the total loss of material on its way from source to receptor and are related to  $z_{i\ max}$ . The procedure is to follow the air parcel and to integrate the loss of material due to dry deposition, taking into account transport of pollutant mass due to a changing mixing height and keeping track of the mass which is isolated from the surface and does not take part in the deposition process. Mass loss due to deposition is described by the following differential equation:

$$\frac{dM(t)}{dt} = F_d = -v_d(t)C(t) = -v_d(t) \frac{M(t)}{z_i(t)}, \quad (2.22)$$

with  $M(t)$ : total cross-wind integrated pollutant mass in the mixing layer [ $\text{g/m}^2$ ],  $F_d$ : deposition flux [ $\text{g/m}^2/\text{s}$ ],  $C(t)$ : concentration [ $\text{g/m}^3$ ] and  $z_i(t)$  the actual mixing height at time  $t$  [m].

Integrating over a time step  $[t, t+\Delta t]$ , this differential equation has as solution

$$M(t + \Delta t) = M(t) \exp\left(-\frac{v_d \Delta t}{z_i(t)}\right). \quad (2.23)$$

Using Eq. 2.23 for successive time steps, the mass at  $t = t_{end}$ , the total travel time of the trajectory, can be computed. Now the effective dry deposition velocity  $\tilde{v}_{d\ tra}$  for the trajectory can be derived from:

$$M(t_{end}) = M(0) \exp\left(-\frac{\tilde{v}_{d\ tra} t_{end}}{z_{i\ max}}\right) \Leftrightarrow \tilde{v}_{d\ tra} = -\frac{z_{i\ max}}{t_{end}} \ln\left(\frac{M(t_{end})}{M(0)}\right), \quad (2.24)$$

where  $z_{i\ max}$  is the maximum mixing height over the trajectory.

It is clear that the fraction of the time that pollutants spend above the mixing layer strongly depends on the source height. Therefore the calculation of effective dry deposition velocities is carried out in the pre-processor for two characteristic source heights: a high source (unit strength, 100 m stack height and plume rise according to Briggs (1975) for a heat content of 20 MW), and a low source (35 m, no plume rise). The latter is representative for sources which always emit within the mixing layer and the former for larger point sources which emit temporarily above the mixing layer.

The effective dry deposition velocities calculated in this way are used in the model in the form of correction factors to the deposition velocity and as such are included in the meteorological data set:

$$f_d(x, h) = \frac{\tilde{v}_{d\ tra}}{\bar{v}_{d\ tra}}, \quad (2.25)$$

where  $x$  denotes the source receptor distance and  $h$  the source height.  $f_d$  has a range of 0.70 - 1.7 with a mean value of 1.2 for the elevated source. For the low source this range is 0.80 - 2.2, with a mean value of 1.4 (sulphur dioxide, 1000 km trajectories). Formally, these correction factors are substance-specific. However, only small differences are found for the usual range of dry deposition velocities. From tests it appears that transport in or above the mixing layer at night explains most of the difference between



correction factors for different source heights. The correction factor for low sources is therefore used for non-buoyant plumes up to 100 m.

## 2.4.7 Summary of the meteorological data set

Table 2.4 gives an overview of the different parameters calculated by the pre-processor, following air parcels from source to receptor at hourly intervals in the period under consideration. Several parameters not yet discussed have been included in the table for reasons of completeness. For every trajectory, representative values for the parameters are determined using parameter-specific averaging methods. The averaging method depends on how the parameter will be used in the model. The trajectories arriving at a receptor during the period considered are distributed over a number of classes, as described in section 0. Average values are calculated for all class – parameter combinations using the same averaging methods. The 4 distance, 12 wind-direction, 3 stability and 2 mixing-height classes for each of the 25 parameters form, collectively, the meteorological data set for the model.

Table 2.4 Parameters calculated by the pre-processor METPRO

	Parameter	unit	A <sup>#</sup>	Remarks
(1)	number of hours that a class has occurred	h	0	
(2)	maximal mixing height over transport distance $z_{i\max}$	m	1	section 2.4.4
(3)	transport velocity $u(10)$	m/s	1	calculated for $z = z_{i\max}/2$ and converted to a reference height of 10 m
(4)	boundary layer resistance for SO <sub>2</sub> $R_b(\text{SO}_2)$	s/m	1	Eq. 5.3 and Eq. 5.7
(5)	aerodynamic resistance at $z = 4$ m + boundary layer resistance $R_a(4) + R_b$	s/m	1	
(6)	aerodynamic resistance at $z = 50$ m + boundary layer resistance $R_a(50) + R_b$	s/m	1	
(7)	deposition correction high sources $f_{d, \text{high}}$	-	0	Eq. 2.25
(8)	deposition correction low sources $f_{d, \text{low}}$	-	0	
(9)	effective path length $fp_{\text{eff}}$	m	1	Eq. 1.1
(10)	space heating coefficient	C	0	Eq. 4.1
(11)	rain probability $P_p$	-	0	derived from hourly or 6-hourly observations: chapter 6
(12)	length of precipitation events $\tau_w$	h	2	
(13)	precipitation intensity $R_i$	mm/h	2	
(14)	global radiation $Q_r$	J/cm <sup>2</sup> /h	0	measurements
(15)	wind speed power law coefficient $P$	-	0	section 2.4.5
(16)	surface resistance for SO <sub>2</sub> $R_c(\text{SO}_2)$	s/m	1	currently not used; $R_c$ values are taken from the DEPAC module in OPS
(17)	percentage of hours that a stability/mixing height class occurs per 2 hour block, source oriented	%	3	used to manage diurnal emission variations
(18)	percentage of hours that a stability/mixing height class occurs per 2 hour block, receptor oriented	%	3	used to describe diurnal concentration variations
(19)	friction velocity $u_*$	m/s	1	section 2.4.2
(20)	temperature $T$	C	0	measurements
(21)	wind turning with height $A$	degree	0	section 2.4.5.3
(22)	Monin-Obukhov length $L$	m	1	section 2.4.2
(23)	sensible heat flux $H_0$	W/m <sup>2</sup>	0	section 2.4.2
(24)	relative humidity	%	0	measurements
(25)	surface resistance for NO <sub>2</sub> $R_c(\text{NO}_2)$	s/m	1	currently not used; $R_c$ values are taken from the DEPAC module in OPS

(26)	surface resistance for $\text{NH}_3$ $R_c(\text{NH}_3)$	s/m	1	currently not used; $R_c$ values are taken from the DEPAC module in OPS
(27)	surface resistance for $\text{NO}_3$ aerosol $R_c(\text{NO}_3)$	s/m	1	from DEPAC module in METPRO

- # A = averaging method  
 0: standard averaging within classes  
 1: reciprocal averaging within classes  
   - for deposition resistances, this means that we average conductances in m/s  
   - concentrations are inversely proportional to mixing height and transport velocity  
 2: standard averaging over rainy hours only  
 3: no averaging but classification into time-of-day groups

*Table 2.5 Some statistical parameter values as a function of the atmospheric stability classes (Data based on KNMI observations over the Netherlands in the period 1990-1999)*

Meteorological parameter	Unit	U1	U2	N1	N2	S1	S2	Avg <sup>#</sup>
Frequency of occurrence	%	10	22	18	17	13	20	
Wind speed at 10 m $u_{10}$	$\text{m s}^{-1}$	2.5	3.9	3.9	6.9	1.3	2.6	2.9
Wind turning 10-200 m $A$	degrees	8	0	11	3	27	20	10
Temperature $T$	$^{\circ}\text{C}$	11	16	9	8	7	8	10
Global radiation $Q_r$	$\text{W m}^{-2}$	206	378	20	22	2	3	114
Precipitation probability $P_p$		0.041	0.037	0.105	0.202	0.019	0.045	0.077
Precipitation intensity $R_i$	$\text{mm h}^{-1}$	1.26	1.53	1.15	1.10	1.06	1.24	1.22
Length of prec. events $\tau_w$	$\text{h}^{-1}$	1.7	1.5	2.0	2.5	1.7	1.8	2.0
Relative humidity $RH$	%	83	67	88	86	92	89	83
Space heating coefficient $stc$	$^{\circ}\text{C}$	6.6	5.4	10.0	16.2	5.7	8.0	8.7
Sensible heat flux $H_0$	$\text{W m}^{-2}$	36	80	-25	-39	-3	-19	6
Friction velocity $u_*$	$\text{m s}^{-1}$	0.28	0.43	0.36	0.68	0.53	0.18	0.19
Monin Obukhov length $L$	m	-47	-64	196	701	6	32	44
Mixing height $z_{i\max}$	m	231	888	290	540	42	146	165
Aerodynamic resistance $R_a(4)$	$\text{s m}^{-1}$	22	15	21	11	240	46	24
Aerodynamic resistance $R_a(50)$	$\text{s m}^{-1}$	34	24	45	21	862	133	47

# different averaging methods, see Table 2.4.

## 2.5 References

- Beljaars A.C.M. and Holtslag A.A.M. (1990) A software library for the calculation of surface fluxes over land and sea. *Environ. Software* 5, 60-68.
- Briggs G.A. (1975) Plume rise predictions. In: *Lectures on Air Pollution and Environmental Impact Analysis*. American Meteorological Society, Boston MA. 59-111.
- Businger J.A. (1982) Equations and concepts. In: Nieuwstadt F.T.M. and Dop H. van, editors. *Atmospheric turbulence and air pollution modelling*. D. Reidel, Dordrecht, the Netherlands.
- Carson D.J. and Richards P.J.R. (1978) Modelling surface turbulent fluxes in stable conditions. *Boundary-Layer Meteorol.* 14, 67-81.
- Collier and Lockwood (1974) The estimation of solar radiation under cloudless skies with atmospheric dust, *Quart. J. Roy. Met. Soc.*, 100, 678-681.
- Collier and Lockwood (1975) Reply to commentary about the above article, *Quart. J. Roy. Met. Soc.*, 101, 390-392.
- De Bruin H.A.R. and Holtslag A.A.M. (1982) A simple parameterisation of the surface fluxes of sensible and latent heat during daytime compared with the Penman-Monteith concept. *J. Appl. Meteor.* 21, 1610-1621.
- De Waal E.S and Pul W.A.J. van (1995) Description of the RIVM trajectory model. RIVM, Bilthoven, the Netherlands. Report no. 722501001.
- Delage Y. (1974) A numerical study of the nocturnal atmospheric boundary layer. *Q. J. R. Meteorol. Soc.* 100, 351-364.

- Driedonks A.G.M. (1981) Dynamics of the Well-Mixed Atmospheric Boundary Layer. [PhD thesis]. Royal Netherlands Meteorological Institute, De Bilt, the Netherlands. Scientific report W.R. 81-2.
- Erismann J.W. (1990) Estimates of the roughness length at Dutch Air Quality Monitoring Network stations and on a grid basis over the Netherlands. RIVM, Bilthoven, the Netherlands. Report no. 723001003.
- Garratt J.R., Wyngaard J.C. and Francey R.J. (1982) Winds in the atmospheric boundary layer - Prediction and observation. *J. Atmos. Sci.* 39, 1307-1316.
- Golder, D.: 1972 Relations Among Stability Parameters in the Surface Layer, *Boundary-Layer Meteorology* 3, 47-58.
- Hanna S.R. (1981) Diurnal variation of horizontal wind direction fluctuations in complex terrain at Geysers, California. *Boundary-Layer Meteorol.* 21, 201-213.
- Holtslag A.A.M. and Ulden A.P. van (1983a) A simple scheme for daytime estimates of the surface fluxes from routine weather data. *J. Climate Appl. Meteorol.* 22, 517-529.
- Holtslag and van Ulden (1983b) De meteorologische aspecten van luvo modellen: eindrapport van het project klimatologie verspreidingsmodellen. WR83-04, KNMI, The Netherlands, <http://www.knmi.nl/bibliotheek/knmipubWR/WR83-04.pdf> (partly in English).
- Holtslag A.A.M. (1984) Estimates of diabatic wind speed profiles from near surface weather observations. *Boundary-Layer Meteorol.* 29, 225-250.
- Holtslag A.A.M. and Bruin H.A.R. de (1988) Applied modelling of the nighttime surface energy balance over land. *J. Appl. Meteor.* 27, 689-704.
- Kasten and Czeplak (1980) Solar and terrestrial radiation dependent on the amount and type of cloud, *Solar Energy*, 24, 177-189.
- Nieuwstadt F.T.M. (1981) The nocturnal boundary layer; theory and experiments [PhD thesis]. Royal Netherlands Meteorological Institute, De Bilt, the Netherlands. W.R. 81 - 1.
- Nieuwstadt F.T.M. (1984) Some aspects of the turbulent stable boundary layer. *Boundary-Layer Meteorol.* 30, 31-55.
- Pasquill, F. (1961) The estimation of the dispersion of windborne material, *The Meteorological Magazine*, vol 90, No. 1063, pp 33-49.
- Paulson C.A. (1970) The mathematical representation of wind speed and temperature profiles in the unstable atmospheric surface layer. *J. Appl. Meteorol.* 9, 856-861.
- Stull R.B. (1983) A heat-flux-history length scale for the nocturnal boundary layer. *Tellus* 35A, 219-230.
- Tennekes H. (1973) A model for the dynamics of the inversion above a convective boundary layer. *J. Atmos. Sci.* 30, 558-567.
- TNO (1976) Modellen voor de berekening van de verspreiding van luchtverontreiniging inclusief aanbevelingen voor de waarden van parameters in het lange-termijnmodel. Staatsuitgeverij, the Hague, the Netherlands.
- Van Jaarsveld J. A. (1995) Modelling the long-term atmospheric behaviour of pollutants on various spatial scales. Ph.D. Thesis, Utrecht University, the Netherlands
- Van Ulden A.P. and Holtslag A.A.M. (1985) Estimation of atmospheric boundary layer parameters for diffusion applications. *J. Climate Appl. Meteorol.* 24, 1196-1207.
- Wieringa J. (1981) Estimation of mesoscale and local-scale roughness for atmospheric transport modelling. In: Wispelaere, C., editor. *The 11th Int. Tech. Meeting on air pollution modelling and its application*. Plenum Press, New York, 279-295.

## 2.6 Appendix: meteorological stations

Table 2.6: Overview of KNMI stations from which meteorological data is taken. The local database contains data starting at 1981-01-01 and this 1981 situation is given here.

Station code	Station name	Obs. height (m)	Wind	Global radiation		Rel. hum.	Temp.	Precip. char.	Remarks
				1981	1987				
210	Valkenburg	10						X	
235	De Kooy	10	X	X	X	X	X	X	
240	Schiphol	10	X		X	X	X	X	
250	Terschelling	10							Up to 1990
260	De Bilt	20	X	X	X	X	X	X	
269	Lelystad	10							
270	Leeuwarden	10	X		X	X	X	X	
275	Deelen	10	X		X	X	X	X	
277	Lauwersoog	10							
279	Hoogeveen	10							
280	Eelde	10	X	X	X	X	X	X	
290	Twenthe	10	X		X	X	X	X	
310	Vlissingen	20	X	X	X	X	X	X	
344	Rotterdam	10	X		X	X	X	X	
348	Cabauw	10, 200							1993-1996
350	Gilze Rijen	10	X		X	X	X	X	
370	Eindhoven	10	X		X	X	X	X	
375	Volkel	10	X			X	X	X	
380	Maastricht	10	X	X	X	X	X	X	

Table 2.7: KNMI stations with snow cover data

	210	235	260	270	280	290	310	370	380
1990-1995		x	x		x		x		x
1996-1999		x	x		x				
2000-2002	x	x	x	x	x	x		x	

From 2003, there are no snow cover data available in the LML database.

### 3. Mass balance and dispersion

#### 3.1 Mass balance equations

The change of a mass  $M_p$  [g] over time  $t$  [s] for a pollutant in a well-mixed layer due to chemical conversion and deposition can be formulated as follows:

$$\frac{dM_p}{dt} = -k_p M_p \quad (3.1)$$

and for a secondary-formed pollutant  $M_s$ , with linear dependence on  $M_p$ :

$$\frac{dM_s}{dt} = k_c M_p - k_s M_s. \quad (3.2)$$

The rate constants  $k_p$  and  $k_s$  [ $s^{-1}$ ] are defined as:

$$k_p = \frac{v_{dp}}{z_i} + k_c + \Lambda_{wp} \quad (3.3)$$

$$k_s = \frac{v_{ds}}{z_i} + \Lambda_{ws}, \quad (3.4)$$

where  $v_{dp}$  and  $v_{ds}$  are dry deposition velocities [ $m\ s^{-1}$ ],  $\Lambda_{wp}$  and  $\Lambda_{ws}$  wet scavenging coefficients [ $s^{-1}$ ],  $k_c$  the pseudo first-order chemical reaction constant [ $s^{-1}$ ], and  $z_i$  the mixing-layer height [m]. Subscripts  $p$  and  $s$  refer to the primary-emitted and the secondary-formed substance respectively. Further chemical reactions involving  $M_s$  are not taken into account.

The cross-wind integrated mass flux  $Q$  [ $g\ s^{-1}$ ] at a distance  $x$  [m] from the point of release for a source emitting continuously with a rate of  $Q_0$  [ $g\ s^{-1}$ ] can be obtained by solving Eqs. (3.1) and (3.2) after introduction of a horizontal transport velocity  $u$  [ $m\ s^{-1}$ ] ( $u = x/t$ ):

$$Q_p(x) = Q_0 \exp\left(-k_p \frac{x}{u}\right) \quad (3.5)$$

$$Q_s(x) = Q_0 \frac{k_c}{k_p - k_s} \left[ \exp\left(-k_s \frac{x}{u}\right) - \exp\left(-k_p \frac{x}{u}\right) \right]. \quad (3.6)$$

### 3.2 Dispersion

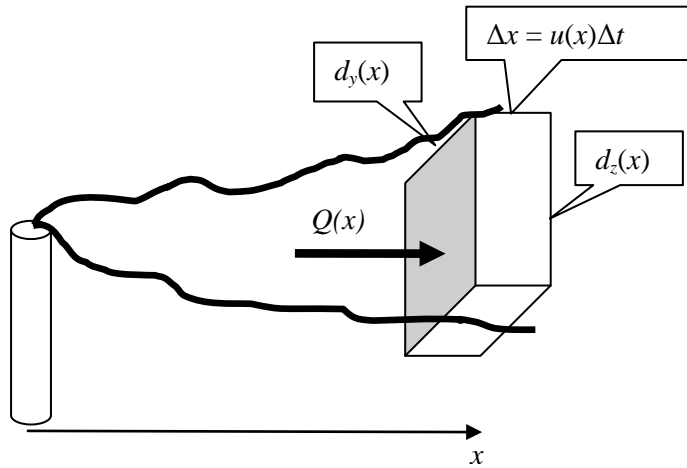


Figure 3.1 Mixing volume of plume at distance  $x$ , with mass flux  $Q(x)$ .

The plume concentration  $C$  [ $\text{g m}^{-3}$ ] at a distance  $x$  is related to the mass-flux by dividing the mass in the mixing volume (see Figure 3.1)  $M(x) = Q(x) \cdot \Delta t$  by the volume with dimensions [m]  $\Delta x = u(x)\Delta t$ ,  $d_y(x)$ , and  $d_z(x)$ , the lateral and vertical distance resp. over which the plume has dispersed. This leads to:

$$C(x) = \frac{Q(x)}{u(x)} D_y(x) D_z(x), \quad (3.7)$$

where  $D_y(x)$  and  $D_z(x)$  [ $\text{m}^{-1}$ ] represent the lateral and vertical dispersion factor equal to  $1/d_y(x)$  and  $1/d_z(x)$  resp. The subscripts  $p$  and  $s$  have been dropped because this and the following expressions are equal for both the primary and the secondary substance. If horizontal transport is assumed to take place in one out of  $m_s$  wind direction sectors, then the lateral distance is  $\alpha x$ , with  $\alpha = 2\pi/m_s$  the sector angle and it follows that  $D_y(x)$  within this sector is given by:

$$D_y(x) = \frac{m_s}{2\pi x} \quad (3.8)$$

and  $D_y(x) = 0$  outside the sector. In the case of a homogeneous vertical distribution of the pollutant in the mixing-layer with height  $z_i$ ,  $D_z(x)$  is simply:

$$D_z(x) = \frac{1}{z_i}. \quad (3.9)$$

For the dry deposition flux  $F_d(x)$  [ $\text{g m}^{-2} \text{s}^{-1}$ ] we obtain:

$$F_d(x) = -v_d C(x), \quad (3.10)$$

where  $C(x)$  and  $v_d$  both have to be formally defined for a reference height  $z$  above the surface.

The wet deposition flux  $F_w(x)$  is defined by:

$$F_w(x) = \frac{Q(x)}{u} D_y(x) \Lambda_w. \quad (3.11)$$

Time-averaged concentration and deposition in a receptor point due to a source at a distance  $x$  and in a direction  $\varphi$  is calculated by:

$$\bar{C}(x, \varphi) = \sum_{s=1}^{s_c} \sum_{m=1}^{m_s} \left[ \frac{Q(x, s, m)}{u(x, s, m)} D_y(x) D_z(x, s, m) f(s, m) \right] \quad (3.12)$$

$$\overline{F_d}(x, \varphi) = - \sum_{s=1}^{s_c} \sum_{m=1}^{m_s} \left[ v_d(s, m) C(x, s, m) f(s, m) \right] \quad (3.13)$$

$$\overline{F_w}(x, \varphi) = \sum_{s=1}^{s_c} \sum_{m=1}^{m_s} \left[ \frac{Q(x, s, m)}{u(x, s, m)} D_y(x) \Lambda_w(s, m) f(s, m) \right], \quad (3.14)$$

where  $f(s, m)$  is the distribution function of wind-direction classes  $m_s$  and atmospheric stability/mixing height classes  $s_c$  for the period over which the averaging has to be carried out. Note that in all the above equations,  $x$  refers to the real transport path length and that  $v_d$  and  $\Lambda_w$  in Eqs. (3.10) and (3.11) refer to deposition parameters at the receptor site while those in Eqs. (3.3) and (3.4) refer to parameters representative for the total trajectory.

### 3.3 Vertical mixing close to sources

A serious limitation for models assuming instantaneous vertical mixing in the mixing-layer is that concentrations due to emissions of low-level sources will be underestimated, while the effect of sources emitting at high levels can be overestimated. In Eulerian models this problem can be solved by defining sublayers in the mixing-layer. For one-layer Lagrangian deposition models a correction factor is defined sometimes, representing the fraction of the emission that is directly deposited within the grid cell (Eliassen and Saltbones, 1983; Janssen and Asman, 1988). In some statistical LRT models immediate vertical mixing within the boundary layer is also assumed (Smith, 1981; Venkatram *et al.*, 1982). Other authors use vertical distribution functions based on the K-diffusion theory (Bolin and Persson, 1975; Sheih, 1977; Fisher, 1978).

The problem of local dispersion is solved in this model by replacing  $D_z(x) = 1/z_i$  in Eq. (3.9) by a Gaussian plume formulation, in which the vertical dispersion (for  $z = 0$ ) is described as a function of source height, mixing height and a stability-dependent vertical dispersion length  $\sigma_z(x)$  (the standard deviation from normal on the Gaussian distribution curve) [m]:

$$D_z(x) = \frac{2}{\sqrt{2\pi} \sigma_z} \left( \exp \left[ \frac{-(2z_i - h)^2}{2\sigma_z^2} \right] + \exp \left[ \frac{-(2z_i + h)^2}{2\sigma_z^2} \right] + \exp \left[ \frac{-h^2}{2\sigma_z^2} \right] \right), \quad (3.15)$$

where  $h$  is the effective source height. Equation (3.15) was selected to describe local vertical diffusion, mainly to achieve some compatibility with the 'National Model' in the Netherlands (TNO, 1976). Equation (3.15) gives the same value as  $1/z_i$  within 1.5% for the entire range of  $h$  within the mixing layer when  $\sigma_z > 1.6 z_i$ , so a gradual change from limited vertical dispersion to full mixing at larger distances is automatically obtained.

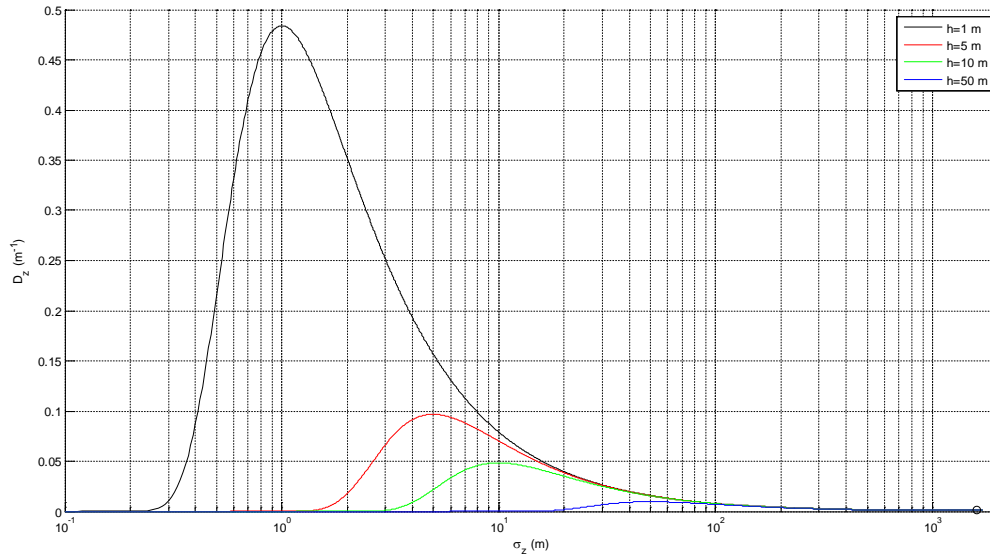


Figure 3.2 Vertical dispersion factor  $D_z$  as function of vertical dispersion length  $\sigma_z$  for different values of source height  $h$  and a mixing height  $z_i = 1000$  m (Eq. 3.15). The circle at the far right denotes the value  $D_z = 1/z_i$  (Eq. 3.9).

### 3.3.1 Dispersion of heavy plumes

Heavy plumes are defined as plumes consisting of large particles that do not follow all micro-scale atmospheric movements completely. This is the case if the size of the particles is so large that they settle downwards with a velocity that is significantly higher than the dry deposition caused by processes as inertial impaction or atmospheric diffusion. The mass weighted centre of such plumes will decrease with transport distance, resulting in an enhanced concentration at the surface compared to similar plumes with no ‘falling’ particles.

More important than the enhanced atmospheric concentration caused by descending plumes might be the effect on the dry deposition flux. This is due to the strongly non-linear relation between particle size and deposition velocity. A few percent heavy particles may cause a major contribution to the total dry deposition flux.

Large particles usually originate from windblown dust, open fires, incinerators with no filter equipment, sea-salt and so on. In the OPS model a single size-class for heavy plumes is used. This class is reserved for particles larger than  $20 \mu\text{m}$ . For other size classes, the sedimentation effect is incorporated in the dry deposition velocity, but no effect on the plume height is assumed.

The cross-wind integrated concentration ( $\text{g/m}^2$ ) in a heavy plume is described (Onderdelinden, 1985) by a direct source term and an indirect source, reflecting from the earth surface:

$$C(x, z) = \frac{Q}{\sqrt{2\pi} u \sigma_z} \left( \exp \left[ \frac{-(z - h + \delta)^2}{2\sigma_z^2} \right] + \exp \left[ \frac{-(z + h + \delta)^2}{2\sigma_z^2} + \frac{4h\delta}{2\sigma_z^2} \right] \right), \quad (3.16)$$

with  $Q$  the source strength,  $h$  the emission height,  $\delta$  the plume descent (m):

$$\delta = v_s \frac{x}{u}, \quad (3.17)$$

where  $v_s$ : settling velocity of heavy particles (m/s),  $x$ : down-wind distance from source (m),  $u$ : wind speed (m/s).



### 3.3.2 Local vertical dispersion

For an appropriate determination of the vertical dispersion length, the turbulent state of the atmospheric boundary layer must be assessed. Most widely used is the approach of Pasquill (1961) and Gifford (1961). The Pasquill-Gifford scheme prescribes the quantitative relation between the stability of the atmosphere and insulation in combination with wind speed. The scheme has been deduced from experiments using sources near the ground. First versions of the present model (Van Jaarsveld, 1990) also used the Pasquill-Gifford scheme for dispersion and an empirical method for estimating stability similar to the Pasquill-Turner scheme (KNMI, 1972). Vertical dispersion was described there as

$$\sigma_z = c_{z0} a x^b, \quad (3.18)$$

with  $c_{z0}$  a correction factor for surface roughness and  $a$  and  $b$  stability-class-dependent dispersion coefficients taken from the Dutch National model (TNO, 1976).

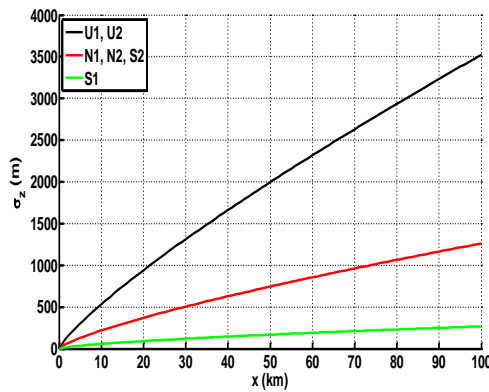


Table 3.1: initial settings of parameters  $a$  and  $b$  in Eq. 3.18. Note that coefficient  $a$  is recalculated based on more sophisticated parameterisations of  $\sigma_z$ .

stability class	$a$	$b$
U1, U2	0.2800	0.8200
N1, N2, S2	0.2000	0.7600
S1	0.1200	0.6700

Figure 3.3 Vertical dispersion length  $\sigma_z$  as described by Pasquill as function of  $x$  = distance from source, for stability classes {U1, U2}, {N1, N2, S2} and S1;  $c_{z0} = 1$ . Stability classes as defined in Table 1.1. Note that the present OPS-model uses more sophisticated parameterisations of  $\sigma_z$ .

Turbulence typing schemes, such as the Pasquill-Turner one, are biased toward neutral stability when convective situations actually exist (Weil and Brower, 1984).

Kretzschmar and Mertens (1984) reviewed the turbulence typing schemes and corresponding dispersion algorithms of a number of Gaussian short-range models. They found that the predicted maximum concentration and also the distance of this maximum concentration differed between the models by one order of magnitude. In the present version of the model, more recent concepts of the description of turbulence and dispersion in the boundary layer have been used. In such a concept the boundary layer is divided into a number of regimes, each characterised by distinct scaling parameters (Holtslag and Nieuwstadt, 1986; Gryning *et al.*, 1987). The Holtslag and Nieuwstadt scheme is adopted here in a simplified form. The regimes distinguished are (see also Figure 3.4):

- a. a surface layer with a height up to  $0.1 z_i$ ,
- b. a convective mixing layer ( $z_i/L < -10$  and  $z/z_i > 0.1$ )
- c. a near neutral upper layer ( $0 > z_i/L > -10$  and  $z/z_i > 0.1$ ) and
- d. a second near neutral layer above a stable surface layer ( $0 < z_i/L$  and  $z/z_i > 0.1$ ),

where  $L$  is the Monin-Obukhov length [m].

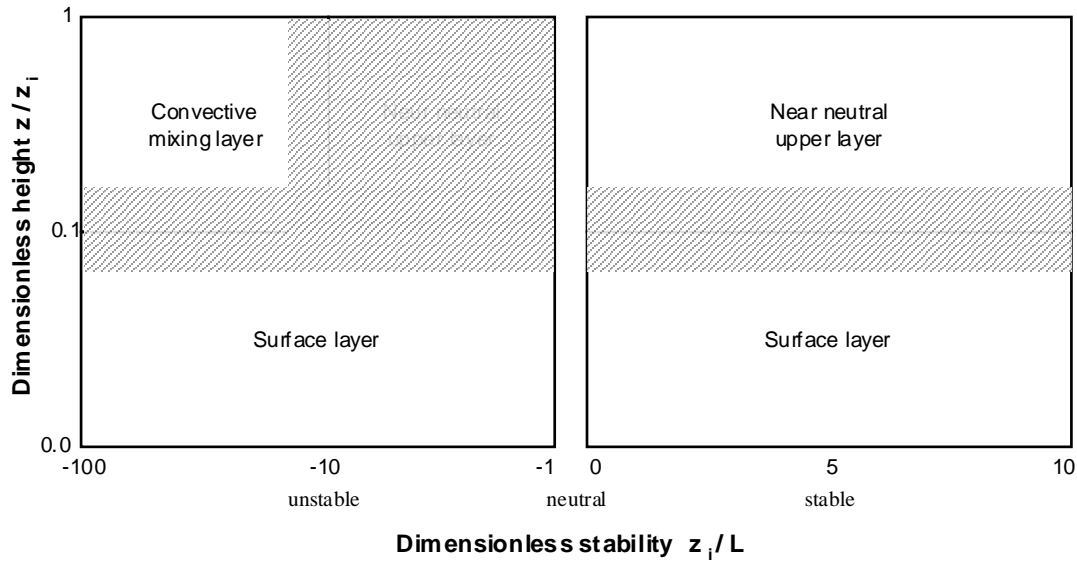


Figure 3.4 The scaling regions of the atmospheric boundary layer distinguished by the present model, and shown as function of the dimensionless height,  $z/z_i$ , and the stability parameter,  $z_i/L$  ( $L$ : Monin-Obukhov length). This scheme is a simplified form of the Holtslag and Nieuwstadt scheme (1986). In the shaded areas, OPS interpolates  $\sigma_z$ .

#### a. surface layer

The effect of stability on the structure in this layer can be described by the Monin-Obukhov similarity theory. Nieuwstadt and Van Ulden (1978) have shown that the vertical dispersion from a ground-level source in this layer can be adequately described by  $K$ -models. The  $K$ -model can be derived from the well-known diffusion equation, when horizontal diffusion is neglected:

$$u \frac{\partial C}{\partial t} = \frac{\partial}{\partial z} K_z(z) \frac{\partial C}{\partial z}. \quad (3.19)$$

OPS uses the following parameterisations for  $K_z$ :

$$K_z = \frac{\kappa u_* z}{\varphi_h(z/L)}, \quad \text{for } L > 0 \text{ (Businger, 1973),} \quad (3.20)$$

$$K_z = \frac{\kappa u_* z}{\varphi_h(z/L)} \left(1 - \frac{z}{z_i}\right)^{1.5}, \quad \text{for } L \leq 0 \text{ (Brost and Wyngaard, 1978),} \quad (3.21)$$

where  $\varphi_h(z/L)$  is the non-dimensional temperature gradient:

$$\varphi_h(z/L) = 0.74 (1 - 9 z/L)^{-1/2} \quad \text{for } L \leq 0, \quad (3.22)$$

$$\varphi_h(z/L) = 0.74 + 4.7 z/L \quad \text{for } L > 0. \quad (3.23)$$

Note that the von Kármán constant  $\kappa$  in Eq. (3.20) is specified by Businger as 0.35, while for the rest of this work,  $\kappa$  is taken 0.4.

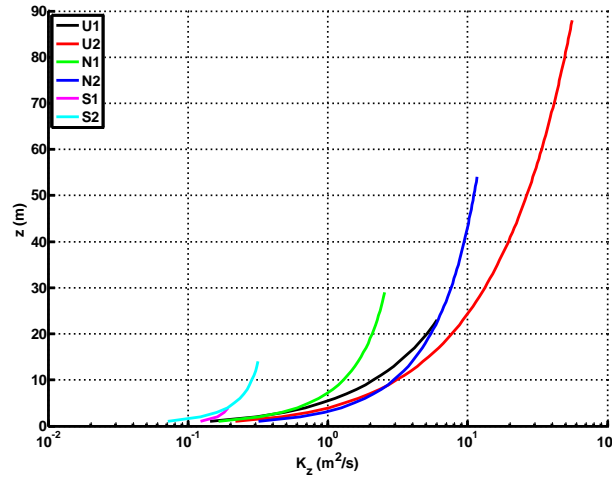


Figure 3.5 Diffusion coefficient  $K_z$  (log scale) as function of  $z$  ( $z < 0.1z_i$ ) for different meteo classes. Meteo classes and parameters for  $u^*$ ,  $L$ ,  $z_i$  from **Table 2.5**

The  $K$ -model is usually solved numerically; however, analytical solutions for surface-layer  $K$ -models have also been proposed (e.g. Van Ulden, 1978). Instead of using a separate model for the surface layer,  $K$ -theory in combination with the Gaussian dispersion formulation given in Eq. (3.15) has been applied. In fact, a Gaussian model is an analytical solution of the general diffusion equation for a continuous source in a situation with constant wind speed and diffusion, and where advection in the  $x$  direction is much more important than diffusion in this direction. Under these conditions  $\sigma_z$  can be related to the turbulent eddy diffusivity  $K_z$  (Pasquill, 1962):

$$\sigma_z^2 = 2K_z x / u. \quad (3.24)$$

This relation suggests that  $\sigma_z$  increases with distance proportional to  $x^{1/2}$ , while dispersion experiments show that this is only so for large  $\sigma_z$ . This discrepancy is mainly caused by not taking into account the vertical dimensions of the plume. The larger the plume grows, the more eddies have an effect on it. This is in fact what is suggested by the height dependence of  $K_z$  (Eq. 3.20). For (near) surface releases,  $u$  and  $K_z$  should be averaged over the plume height by integration, because the centre of mass may rise above the release height. In the present case an iterative approach is followed, in which  $u$  and  $K_z$  are taken at a representative height equal to  $0.67\sigma_z$  and where  $u$  is derived from the wind speed at 10 m using the logarithmic profile of Eq. 2.13. In this way  $K_z$  becomes a function of  $x$ . The advantage of this approach is that effects of release height and  $z_0$  can be explicitly taken into account, the latter through its effects on  $u$  and  $L$ . The error that is made by describing a non-Gaussian vertical distribution as Gaussian is not large.

The vertical diffusion from sources near the ground is tested using experimental data derived by Van Ulden (1978) from the 'Prairie Grass experiment' (Barad, 1958). Computed cross-wind integrated concentrations, at distances of 50, 200 and 800 m from the source, compare favourably with the observations as is shown in Figure 3.6. The comparison also indicates that the approach followed here has the same performance as the analytical scheme of Van Ulden (1978).

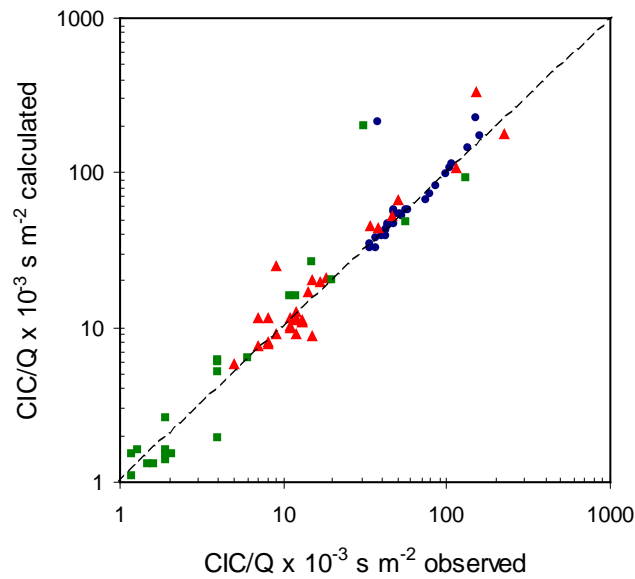


Figure 3.6 Comparison of calculated and measured cross-wind integrated concentration (CIC) divided by the source strength for three down-wind distances. Circles: 50 m. Squares: 200 m. Triangles: 800 m. The observational data, including  $u_*$  and  $L$ , are derived from the 'Prairie Grass' data by Van Ulden (1978).

#### b. convective mixing layer

The dispersion process in the convective mixing layer is dominated by the asymmetric structure of turbulence (Gryning *et al.*, 1987). Downdraughts in this layer occupy a greater area than updraughts; therefore pollutants released from an elevated source have a higher probability of travelling downward than upward. A Gaussian dispersion approach is not suited for such cases. Several models have been proposed to describe the asymmetric behaviour e.g. the probability density function model (Misra, 1982; Venkatram, 1983; Weil and Brower, 1984) or the impingement model for buoyant sources (Venkatram, 1980). Several advanced short-term short-range models, however, still use Gaussian dispersion for the convective mixing layer. Therefore for the present long-term model, the Gaussian distribution was considered adequate.

Theoretical investigations by Deardorff (1972) and laboratory experiments by Willis and Deardorff (1974; 1978; 1981) indicate that turbulence and dispersion in a convective boundary layer are controlled by two important parameters: mixing-layer height  $z_i$  [m] and the convective velocity scale,  $w_*$  [ $\text{m s}^{-1}$ ]:

$$w_* = \left( \frac{g}{T} \frac{H_0}{\rho_a c_p} z_i \right)^{1/3}, \quad (3.25)$$

with

- $\rho_a$  : air density [ $\text{kg m}^{-3}$ ]
- $c_p$  : specific heat capacity [ $\text{J kg}^{-1} \text{K}^{-1}$ ]/
- $g$  : acceleration of gravity [ $\text{m s}^{-2}$ ]
- $T$  : absolute temperature [K]
- $H_0$  : surface heat flux [ $\text{W m}^{-2}$ ].

Another aspect demonstrated by these experiments and also by large eddy simulations (Wyngaard and Brost, 1984) is that turbulent fluxes can be opposed to local concentration gradients. This phenomenon

puts the applicability of eddy diffusion as a basis for dispersion description in this layer on very tenuous ground (Weil, 1985).

Several authors have proposed dispersion parameterisations on the basis of convective velocity scaling. Reviews on this subject are given by Weil (1985) and Briggs (1985). The formulation of Weil and Brower (1984) for convective to neutral cases is taken as suggested by Briggs (1985), reading:

$$\sigma_z = z_i X \left[ \left( \frac{\sigma_{wc}}{w_*} \right)^2 + \left( \frac{\sigma_{wm}}{w_*} \right)^2 \right]^{1/2}, \quad (3.26)$$

where  $X = (x/u)w_*/z_i$ , and  $\sigma_{wc}$  and  $\sigma_{wm}$  are the standard deviations of the vertical velocity component due to convective activity and wind shear (mechanical turbulence), respectively. For the convective limit, OPS uses  $\sigma_{wc}/w_* = 0.56$  (Kaimal *et al.*, 1976) and the neutral limit,  $\sigma_{wm} = 1.26 u_*$  (Panowski *et al.*, 1977). A similar formulation is used in the Danish OML model but with  $\sigma_{wm} = 1.10 u_*$  (Berkowicz *et al.*, 1986).

#### c. and d. upper near neutral layers

The characteristics of dispersion in the near neutral upper layer have not been thoroughly investigated. Turbulence in this region is rather homogenous, enabling the use of a Gaussian plume formulation. Following Venkatram (1984) and Gryning *et al.* (1987) the estimate of the vertical spread is based on Taylor's theory, which relates  $\sigma_z$  to the standard deviations of the vertical wind fluctuations,  $\sigma_w$ . The relation can generally be written as

$$\sigma_z = \sigma_w t f_z(t / \tau_L), \quad (3.27)$$

where  $t$  is the travel time ( $t = x/u$ ) and  $\tau_L$  the Lagrangian time scale. A practical relation for  $f_z$  that matches the short and long time limits of statistical theory is:

$$f_z(t / \tau_L) = 1 / \left( 1 + \left( \frac{t}{2\tau_L} \right)^2 \right)^{1/2}. \quad (3.28)$$

Gryning *et al.* (1987) suggest time scales  $\tau_L$  of 300 s for  $L < 0$  and 30 s for  $L > 0$ . In OPS, a linear function of  $(1/L)$  is used:

$$\tau_L = f_1 - f_2 \left( \frac{1}{L} \right), \text{ with } f_1 = 150 \text{ s}, f_2 = 2000 \text{ sm} \quad (3.29)$$

and cut-off values  $\tau_L$  of 400 s for  $L < 0$  and 10 s for  $L > 0$ .

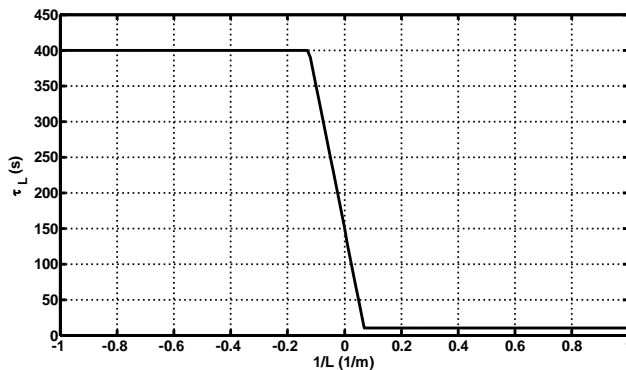


Figure 3.7: Lagrangian time scale  $\tau_L$  as function of inverse Monin-Obukhov length.

Their adopted expressions for  $\sigma_w$  read:

$$(\sigma_w/u_*)^2 = 1.5 [z/(-\kappa L)]^{2/3} \exp(-2z/z_i) + (1.7 - z/z_i) \quad (L \leq 0) \quad (3.30)$$

$$(\sigma_w/u_*)^2 = 1.7(1 - z/z_i)^{3/2} \quad (L \geq 0). \quad (3.31)$$

The latter equation was proposed by Nieuwstadt (1984b) for horizontally homogeneous and stationary conditions. Vertical dispersion calculated for the near neutral upper layer matches those of the convective mixing layer at the boundary between the regions (at  $z/L = -10$ ) rather closely.

### *Procedure in OPS*

In OPS,  $\sigma_z$  for is calculated for the surface layer, convective mixing layer and near neutral upper layer, as a function of distance  $x$ , Monin-Obukhov length  $L$ , friction velocity  $u^*$  and mixing height  $z_i$  (according to 3.24, 3.26, 3.27). Depending on the values of dimensionless height  $z/z_i$  and dimensionless stability  $z_i/L$ , a specific value of  $\sigma_z$  is used; for regions  $0.05 < z/z_i < 0.15$  and  $-20 < z_i/L < 0$  an interpolation is used between the  $\sigma_z$  of the surface layer, convective mixing layer or near neutral upper layer.

Then the stability coefficient  $a$  in Eq. 3.18 is calculated from


$$a = \frac{\sigma_z}{x^b}, \quad (3.32)$$

with values of coefficient  $b$  from Table 3.1. This approach makes it possible to use the expression  $\sigma_z = a x^b$  in the rest of the OPS-model.

### *Comparison with observations*

Computed cross-wind integrated concentrations have been compared with observations obtained in various field experiments with passive tracers. These observations, including the meteorological parameters  $z_i$ ,  $u^*$  and  $L$ , have been compiled by Gryning *et al.* (1987). The stack heights in the different experiments were 2 m, 10 m and 115 m and the downwind distance range at which concentrations were measured was 0.2 - 6.1 km. Figure 3.8 shows the results, split into the different stability regimes.

In general, the agreement is satisfactory, especially for the convective mixing layer and the near neutral upper layer. Concentrations in the surface layer seem to be underestimated for the 115-m source (lower part of the scatter diagram) and overestimated for the 2-m source (upper part of the diagram). The latter overestimation is not seen in the comparison with the Prairie Grass data (Figure 3.6).

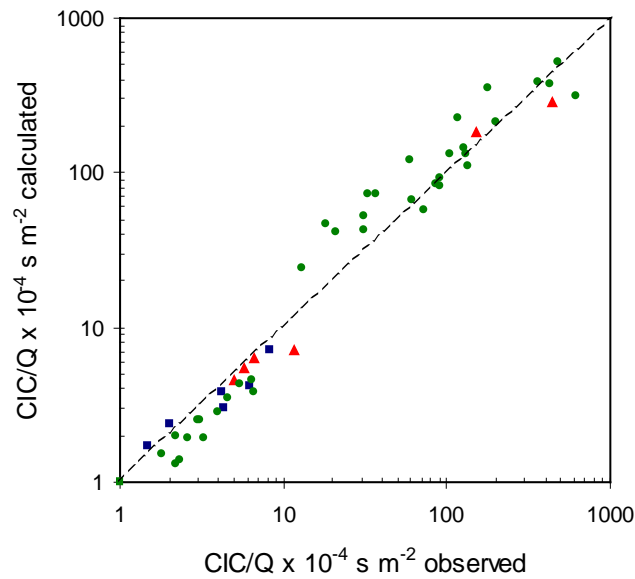

**Figure 3.8** Comparison of calculated and measured cross-wind integrated concentration (CIC) divided by the source strength. Circles: surface layer stability regime. Squares: convective mixing layer regime. Triangles: near neutral upper layer regime. Observational data from various experiments, compiled by Gryning et al. (1987).

## 3.4 Area sources

The dispersion of material from a source is described in the preceding sections, for a source with no initial horizontal or vertical dimensions. In practice, however, it is seldom possible to treat all the sources in a certain area as point sources due to lack of detailed information. Also when the source is of the diffusive type, e.g. ammonia evaporating from a pasture, it is much more effective to treat the pasture as a single area source rather than splitting it up in numerous point sources.

When the heights of the different sources show an important variation, it is preferred to include this variation in the source description as an initial vertical dispersion (Martin, 1971). For modelling concentrations inside and outside an area source, expressions like Eq. (3.15) can be applied, but both the vertical and horizontal distribution terms  $D_z(x)$  and  $D_y(x)$  have to be modified to capture the special properties of the area source.

### 3.4.1 Horizontal dispersion for area sources

A point source will normally contribute to a receptor in only one wind sector,  $i$ , which is determined by:

$$i(\varphi) = \varphi \frac{m_s}{2\pi} + 1, \quad (3.33)$$

where  $\varphi$  is the source - receptor direction specified in radians and  $m_s$  the number of wind-direction sectors which are applied in the model ( $m_s = 12$ ). For area sources, however, contributions from more than one wind sector are possible. The horizontal dimension of an area source is introduced in the model by using the virtual point-source concept, where the virtual origin is put at a distance  $x_v$  upwind from the real position of the source (see Figure 3.9). This virtual distance depends on the number of wind-direction sectors:

$$x_v = \frac{m_s s_a}{2\pi} = \frac{m_s r_a}{\pi}, \quad (3.34)$$

where  $s_a$  is the diameter of the source and  $r_a$  its radius. Replacing  $x$  by  $(x + x_v)$  in Eq. (3.8) introduces the effect of the horizontal dimensions of the source into the description of the horizontal dispersion.

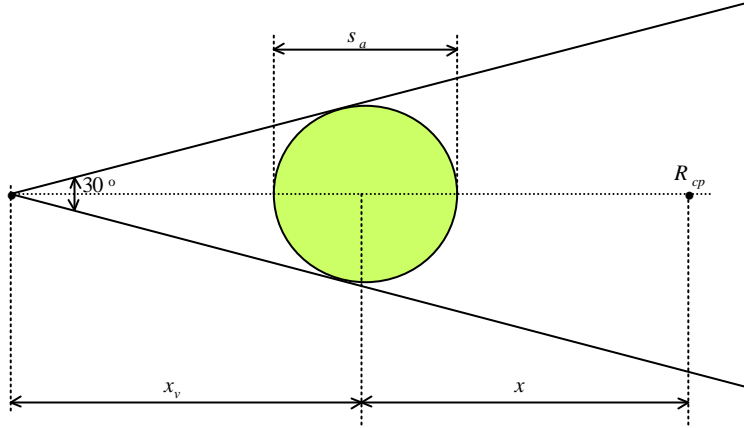


Figure 3.9 Area source represented by a virtual point source.

Another part of the problem is that an area source contributes more often to a given receptor point than a point source does. This is illustrated in Figure 3.10.

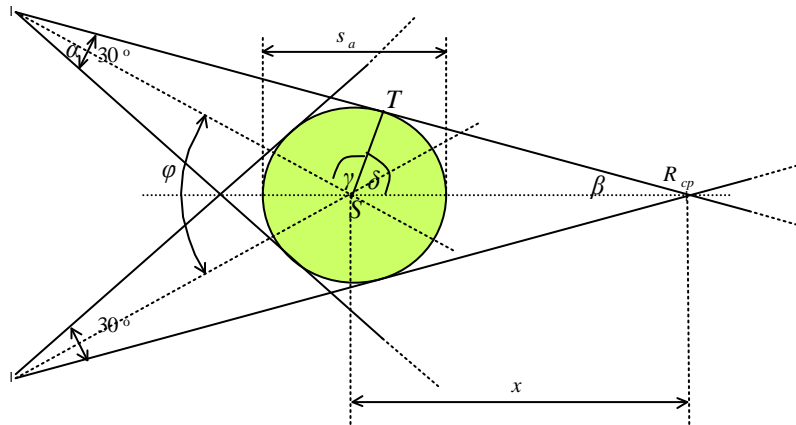


Figure 3.10 Wind directions for which an area source contributes to the concentration in a receptor point.

The wind direction angle, for which influence from the area source to concentrations in a receptor point

$R_{cp}$  can be expected, is indicated by  $\varphi$ . Since  $\gamma = \frac{\pi}{2} - \frac{1}{2}\alpha = \left(\frac{1}{2} - \frac{1}{m_s}\right)\pi$ ,  $\delta = \arctan\left(\frac{TR_{cp}}{ST}\right) =$

$\arctan\left(\frac{\sqrt{(x^2 - r_a^2)}}{r_a}\right)$  and  $\frac{1}{2}\varphi + \gamma + \delta = \pi$ , it follows that



$$\varphi = 2\pi - 2 \left( \arctan\left(\frac{\sqrt{(x^2 - r_a^2)}}{r_a}\right) + \left(\frac{1}{2} - \frac{1}{m_s}\right)\pi \right). \quad (3.35)$$

An equivalent formulation uses  $\beta = \arcsin\left(\frac{ST}{SR_{cp}}\right) = \arcsin\left(\frac{r_a}{x}\right)$  and  $\frac{1}{2}\varphi + \gamma + \left(\frac{\pi}{2} - \beta\right) = \pi$ :

$$\varphi = \frac{2\pi}{m_s} + 2 \arcsin\left(\frac{r_a}{x}\right). \quad (3.36)$$

We consider  $n$  contributing wind sectors, with

$$n = \frac{\varphi}{(2\pi/m_s)}. \quad (3.37)$$

For very large distances ( $x \rightarrow \infty$ ),  $n$  approaches 1, so an area source at that distance is seen as a point source. Another extreme case is when the receptor point is at the edge of the area source ( $x = r_a$ ); the number of sectors then becomes:  $n = 1 + m_s/2$ , which means that using a classification in 12 sectors, the contributions of 7 wind-direction sectors have to be accumulated in determining an average concentration. Equation (3.37) is applied for  $x$  down to  $r_a$ , where the contribution of the 7 sectors is weighed according to the distance to the central sector (sector upwind from the direction centre of the area source to the receptor). The maximum of seven contributing sectors is also applied for receptors within the area source.

### 3.4.2 Vertical dispersion for area sources

The virtual point source concept, as used for the description of horizontal dispersion from sources with non-zero horizontal dimensions, is in principle also suitable for the description of vertical dispersion if plumes have initial vertical dimensions. The corresponding virtual distance would then of course differ from  $x_v$  given in Eq. (3.34). The vertical plume dimension of a source with non-zero horizontal dimensions cannot be described by the virtual point source concept because  $D_z(x)$  is a non-linear function of  $x$ . In the following, an effective vertical dispersion parameter is derived which is used in the equation for  $D_z(x)$ . If one considers an area source as a source representing an infinite number of point sources, then the effective vertical distribution term at a distance  $x$  down-wind from the centre of the area source can be written as (see Figure 3.11):

$$D_z(x)_{eff} = \frac{1}{r_2 - r_1} \int_{r_1}^{r_2} D_z(r) dr \quad (r_1 \geq 0), \quad (3.38)$$

where  $D_z(r)$  is the vertical distribution term for a point source at distance  $r$  down-wind as given by Eq. (3.15).  $r_1$  is taken as zero when  $r < \frac{1}{2} s_a$ .

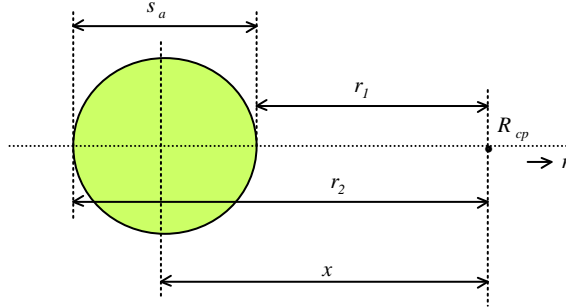


Figure 3.11 Schematic representation of an area source.

Under the condition that reflection against the top of the mixing layer is of minor importance ( $\sigma_z(r) \ll z_i$ ) and the source height is low ( $h \ll \sigma_z(r)$ ), then the above expression can be written as:

$$D_z(x)_{eff} = \frac{1}{r_2 - r_1} \int_{r_1}^{r_2} \frac{2}{\sqrt{2\pi}} \frac{1}{\sigma_z(r)} dr \quad (r_1 \geq 0). \quad (3.39)$$

In order to introduce an initial vertical distribution and also to express the vertical distribution in a more convenient parameter, the following form is chosen:

$$\frac{1}{\sigma_z(x)_{eff}} = \frac{1}{r_2 - r_1} \int_{r_1}^{r_2} \frac{1}{\sigma_z(r) + \sigma_{zi}} dr \quad (r_1 \geq 0) \quad (3.40)$$

where the initial vertical dispersion length  $\sigma_{zi}$  represents the distribution of source heights within the area source. Setting a vertical dispersion length  $\sigma_z(r)$  of the form  $ar^b$ , it is not possible to obtain a simple solution to the integral in Eq. (3.40) for all possible values of  $b$ . For  $b = 1$ , however, we can solve the integral:

$$\sigma_z(x)_{eff} = (ar_2 - ar_1) \left[ \ln \left( \frac{\sigma_{zi} + ar_2}{\sigma_{zi} + ar_1} \right) \right]^{-1}. \quad (3.41)$$

The following expression has been chosen as a practical approximation for a general  $\sigma_{z,eff}$ :

$$\sigma_z(x)_{eff} = (\sigma_z(r_2) - \sigma_z(r_1)) \left[ \ln \left( \frac{\sigma_{zi} + \sigma_z(r_2)}{\sigma_{zi} + \sigma_z(r_1)} \right) \right]^{-1}. \quad (3.42)$$

Equation (3.42) is applied inside and outside the area source with a lower limit equal to  $s_a$  for  $r_2$  and a lower limit equal to  $h/8$  or  $0.1$  m for  $\sigma_{zi}$ . The resulting  $\sigma_{z,eff}$  is used in conjunction with (3.15). When  $\sigma_{z,eff}$  is compared with  $\sigma_z$  for a single point source as a function of down-wind distance, then it appears that  $\sigma_{z,eff}$  is small and rather constant within the area source, rapidly increasing outside the area source and approaching  $\sigma_z$  at a large distance.

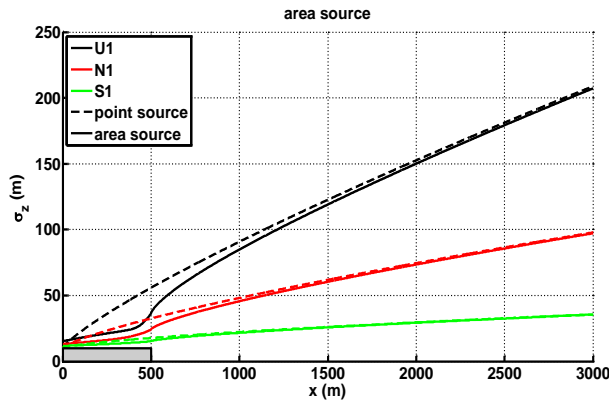


Figure 3.12  $\sigma_{z,eff}$  as function of down-wind distance  $x$  (m) for three meteo classes (Unstable, Neutral, Stable). The dashed lines show  $\sigma_z$  for a point source, the closed lines show  $\sigma_{z,eff}$  for an area source. Half the area source is shown as a grey box (500 m radius, height of the box = initial dispersion length  $\sigma_{zi} = 10$  m).

### 3.5 References

- Barad M.L., editor (1958) Project Prairie Grass, a field program in diffusion. Volume 1, Geophysics Research Paper no. 59. Geophysics Research Directorate, Air Force Cambridge Research Center, Cambridge MA, USA.
- Berkowicz R., Olesen H.R. and Torp U. (1986) The Danish Gaussian Air Pollution Model (OML): description, test and sensitivity analysis in view of regulatory applications. In: De Wispelaere C., Schiermeier F.A. and Gillani N.V., editors. Air pollution modeling and its application V. Plenum Press, New York. p. 453-482.
- Bolin B., Aspling G. and Persson, C. (1974) Residence time of atmospheric pollutants as dependent on source characteristics, atmospheric diffusion processes and sink mechanisms. *Tellus* 26, 185-195.
- Briggs G.A. (1985) Analytical parameterisations of diffusion: The convective boundary layer. *J. Climate Appl. Meteorol.* 24, 1167-1186.
- Brost, R. A., J. C. Wyngaard, 1978: A Model Study of the Stably Stratified Planetary Boundary Layer. *J. Atmos. Sci.*, **35**, 1427–1440. doi: [http://dx.doi.org/10.1175/1520-0469\(1978\)035<1427:AMSOTS>2.0.CO;2](http://dx.doi.org/10.1175/1520-0469(1978)035<1427:AMSOTS>2.0.CO;2)
- Businger J.A. (1973) Turbulent transfer in the atmospheric surface layer. In: Haugen D.A., editor. Workshop on Micrometeorology. AMS, Boston MA. p. 67-100.
- Eliassen A. and Saltbones J. (1983) Modelling of long-range transport of sulphur over Europe: a two-year run and some model experiments. *Atmospheric Environment* 17, 1457-1473.
- Fisher B.E.A. (1978) The calculation of long term sulphur deposition in Europe. *Atmospheric Environment* 12, 489-501.
- Gifford F.A. (1961) Use of meteorological observations for estimating atmospheric dispersion. *Nuclear Safety* 2, 47-51.
- Gryning S.E., Holtslag A.A.M., Irwin J.S. and Sivertsen B. (1987) Applied dispersion modelling based on meteorological scaling parameters. *Atmospheric Environment* 22, 79-89.
- Holtslag A.A.M. and Nieuwstadt F.T.M. (1986) Scaling the atmospheric boundary layer. *Boundary-Layer Meteorol.* 36, 201-209.
- Janssen A.J. and Asman W.A.H. (1988) Effective removal parameters in long-range air pollution transport models. *Atmospheric Environment* 22, 359-367.
- Kaimal J.C., Wyngaard J.C., Haugen D.A., Cote O.R., Izumi Y., Caughey S.J. and Readings C.J. (1976) Turbulence structure in the convective boundary layer. *J. Atmos. Sci.* 33, 2152-2169.
- KNMI (1972) Klimatologische gegevens van Nederlandse stations. Frekwentietabellen van de stabiliteit van de atmosfeer. Royal Netherlands Meteorological Institute, De Bilt, the Netherlands.
- Kretzschmar J.G. and Mertens I. (1984) Influence of the turbulence typing scheme upon cumulative frequency distributions of the calculated relative concentrations for different averaging times. *Atmospheric Environment* 18, 2377-2393.
- Martin D.O. (1971) An urban diffusion model for estimating long term average values of air quality. *J. Air Pollut. Control Assoc.* 21, 16-19.

- Misra P.K. (1982) Dispersion of non-buoyant particles inside a convective boundary layer. *Atmospheric Environment* 16, 239-243.
- Nieuwstadt F.T.M. (1984b) The turbulent structure of the stable nocturnal boundary layer. *J. Atmos. Sci.* 41, 2202-2216.
- Nieuwstadt F.T.M. and Ulden A.P. van (1978) A numerical study on the vertical dispersion of passive contaminants from a continuous source in the atmospheric surface layer. *Atmospheric Environment* 12, 2119-2124.
- Onderdelinden (1985): Source depletion model, personal communication in OPS archive.
- Panowski H.A. Tennekes H., Lenschow D.H. and Wyngaard J.C. (1977) The characteristics of turbulence velocity components in the surface layer under convective conditions. *Boundary-Layer Meteorol.* 11, 355-361.
- Pasquill F. (1961) The estimation of the dispersion of windborn material. *Meteorol. Mag.* 90, 33-49.
- Pasquill F. (1962) *Atmospheric Diffusion*. Van Nostrand, New York. p. 77.
- Sheih C.M. (1977) Application of a statistical trajectory model to the simulation of sulfur pollution over northeastern United States. *Atmospheric Environment* 11, 173-178.
- Smith F.B. (1981) The significance of wet and dry synoptic regions on long-range transport of pollution and its deposition. *Atmospheric Environment* 15, 863-873.
- TNO (1976) Modellen voor de berekening van de verspreiding van luchtverontreiniging inclusief aanbevelingen voor de waarden van parameters in het lange-termijnmodel. Staatsuitgeverij, The Hague, the Netherlands.
- Van Jaarsveld J.A. (1990) An operational atmospheric transport model for priority substances; specification and instructions for use. RIVM, Bilthoven, the Netherlands. Report no. 222501002.
- Venkatram A. (1980) Dispersion from an elevated source in a convective boundary layer. *Atmospheric Environment* 14, 1-10.
- Venkatram A. (1983) On dispersion in the convective boundary layer. *Atmospheric Environment* 17, 529-533.
- Venkatram A. (1984) The uncertainty in estimating dispersion in the convective boundary layer. *Atmospheric Environment* 18, 307-310.
- Venkatram A., Ley B.E. and Wong S.Y. (1982) A statistical model to estimate long-term concentrations of pollutants associated with long-range transport. *Atmospheric Environment* 16, 249-257.
- Weil J.C. (1985) Updating applied diffusion models. *J. Climate Appl. Meteorol.* 24, 1111-1130.
- Weil J.C. and Brower R.P (1984) An updated Gaussian plume model for tall stacks. *J. Air Pollut. Control Assoc.* 34, 818-827.
- Willis G.E. and Deardorff J.W. (1974) A laboratory model of the unstable planetary boundary layer. *J. Atmos. Sci.* 31, 1297-1307.
- Willis G.E. and Deardorff J.W. (1978) A laboratory study of dispersion from an elevated source within a modelled convective planetary boundary layer. *Atmospheric Environment* 12, 1305-1311.
- Willis G.E. and Deardorff J.W. (1981) A laboratory study of dispersion from a source in the middle of the convective mixed layer. *Atmospheric Environment* 15, 109-117.
- Wyngaard J.C. and Brost R.A. (1984) Top-down and bottom-up diffusion of a scalar in the convective boundary layer. *J. Atmos. Sci.* 41, 102-112.

## 4. Emission and emission processes

Important for the dispersion of pollutants are the meteorological conditions at the moment substances are released into the atmosphere. Systematic differences can be found for meteorological conditions, the most important being seasonal variations and diurnal cycles. Variations in emissions such as those related to diurnal cycles in traffic density may be taken into account by introducing typical daily variations. In such cases, despite still using yearly mean emission data, the model relates typical daily cycles in wind speed, temperature, radiation, etc. with the user-specified daily cycle in emissions. Although less specific than relating emission to meteorological conditions directly, this approach is believed to describe an important part of the effects.

In some cases, emission rates depend on the meteorological conditions themselves, e.g. emissions due to evaporation of liquids. In such a case, a correlation is likely to exist between emission rates and deposition rates (Van Jaarsveld *et al.*, 2000). This type of interaction is not addressed by means of a generic approach in the OPS model. Only in the specific case of the NH<sub>3</sub> evaporation from field-applied manure and animal housing systems is this process covered (see sections 0 and 4.3.4).

### 4.1 Emissions: behaviour in time

#### *Daily emission variations – generic approach*

The time-dependent emission behaviour can only be specified as a daily variation. A number of pre-defined daily variations have been included in the model, where the options are:

0	continuous in time
1	according to the (average) industrial activity over a working day
2	according to the (average) heating activity for space heating
3	according to the (average) traffic intensity
31	according to the (average) traffic intensity of light duty vehicles
32	according to the (average) traffic intensity of heavy duty vehicles
33	according to the (average) traffic intensity of (public transport) buses
4	special value for evaporation emissions of NH <sub>3</sub> and NO <sub>x</sub> from animal housings
5	special value for evaporation emissions of NH <sub>3</sub> and NO <sub>x</sub> from application of manure and fertiliser

Apart from these pre-defined diurnal variations, the user can define up to 999 own variations, coded -1 to -999.

The daily variation is given in 2-hourly blocks and is specified in the local time zone at the source location; it uses the longitude which has been specified in the preprocessor METPRO. No distinction has been made between winter and summer time.

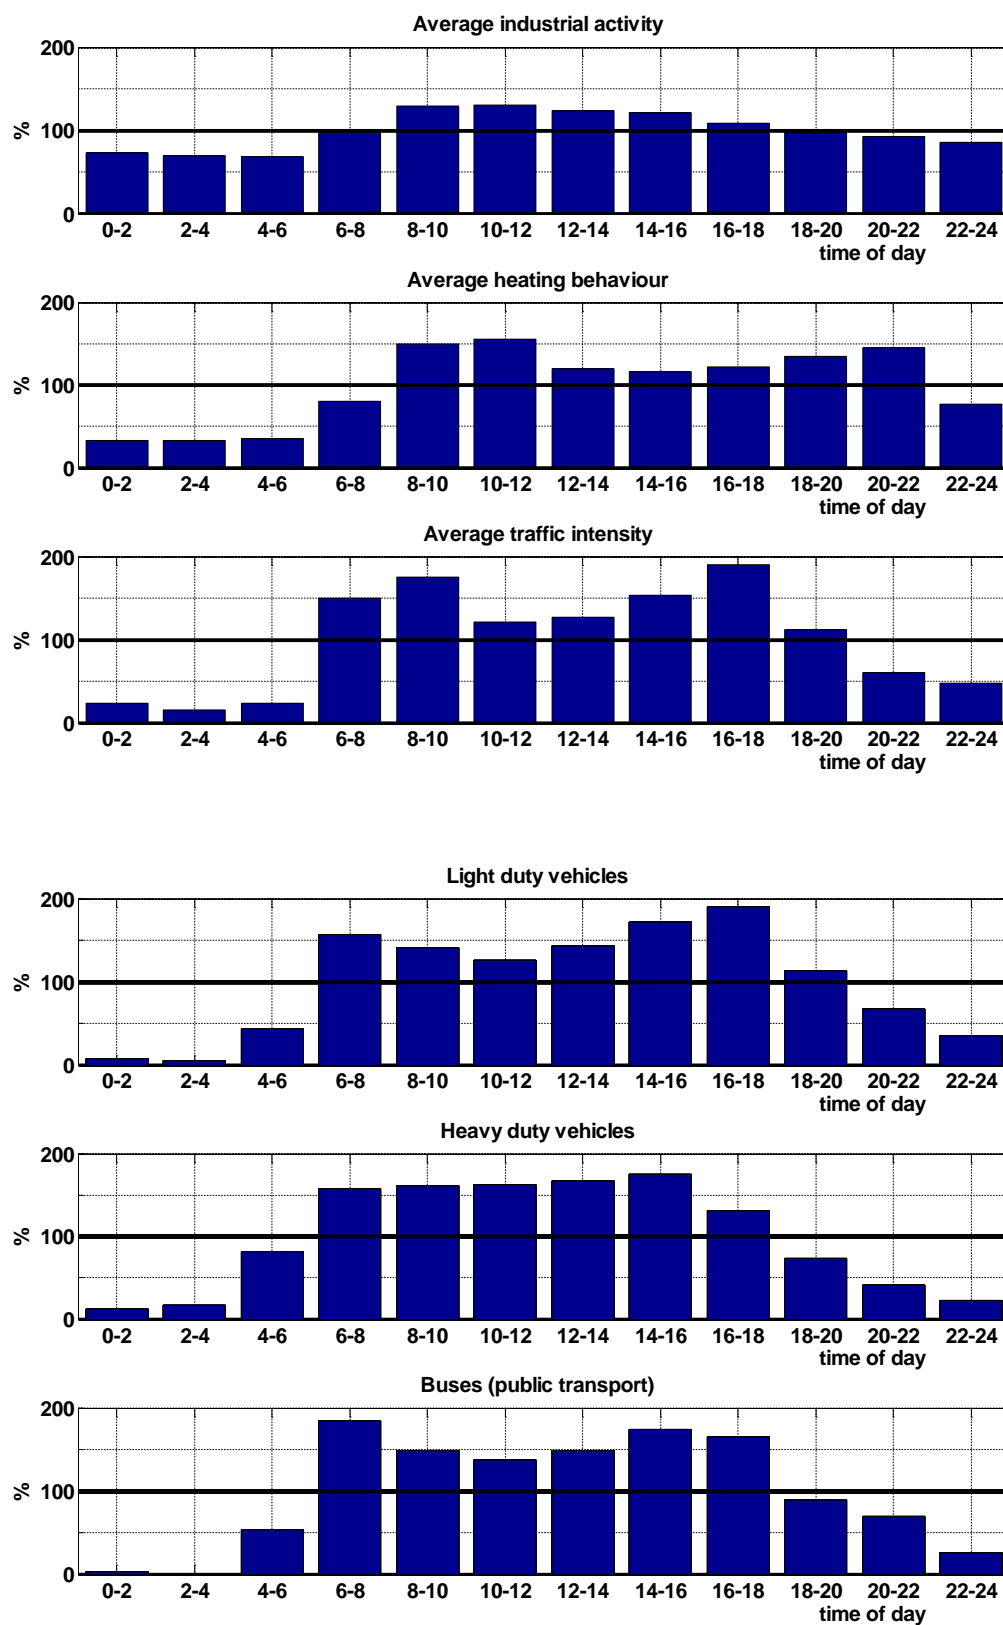


Figure 4.1 shows the pre-defined daily emission variations used by the model.

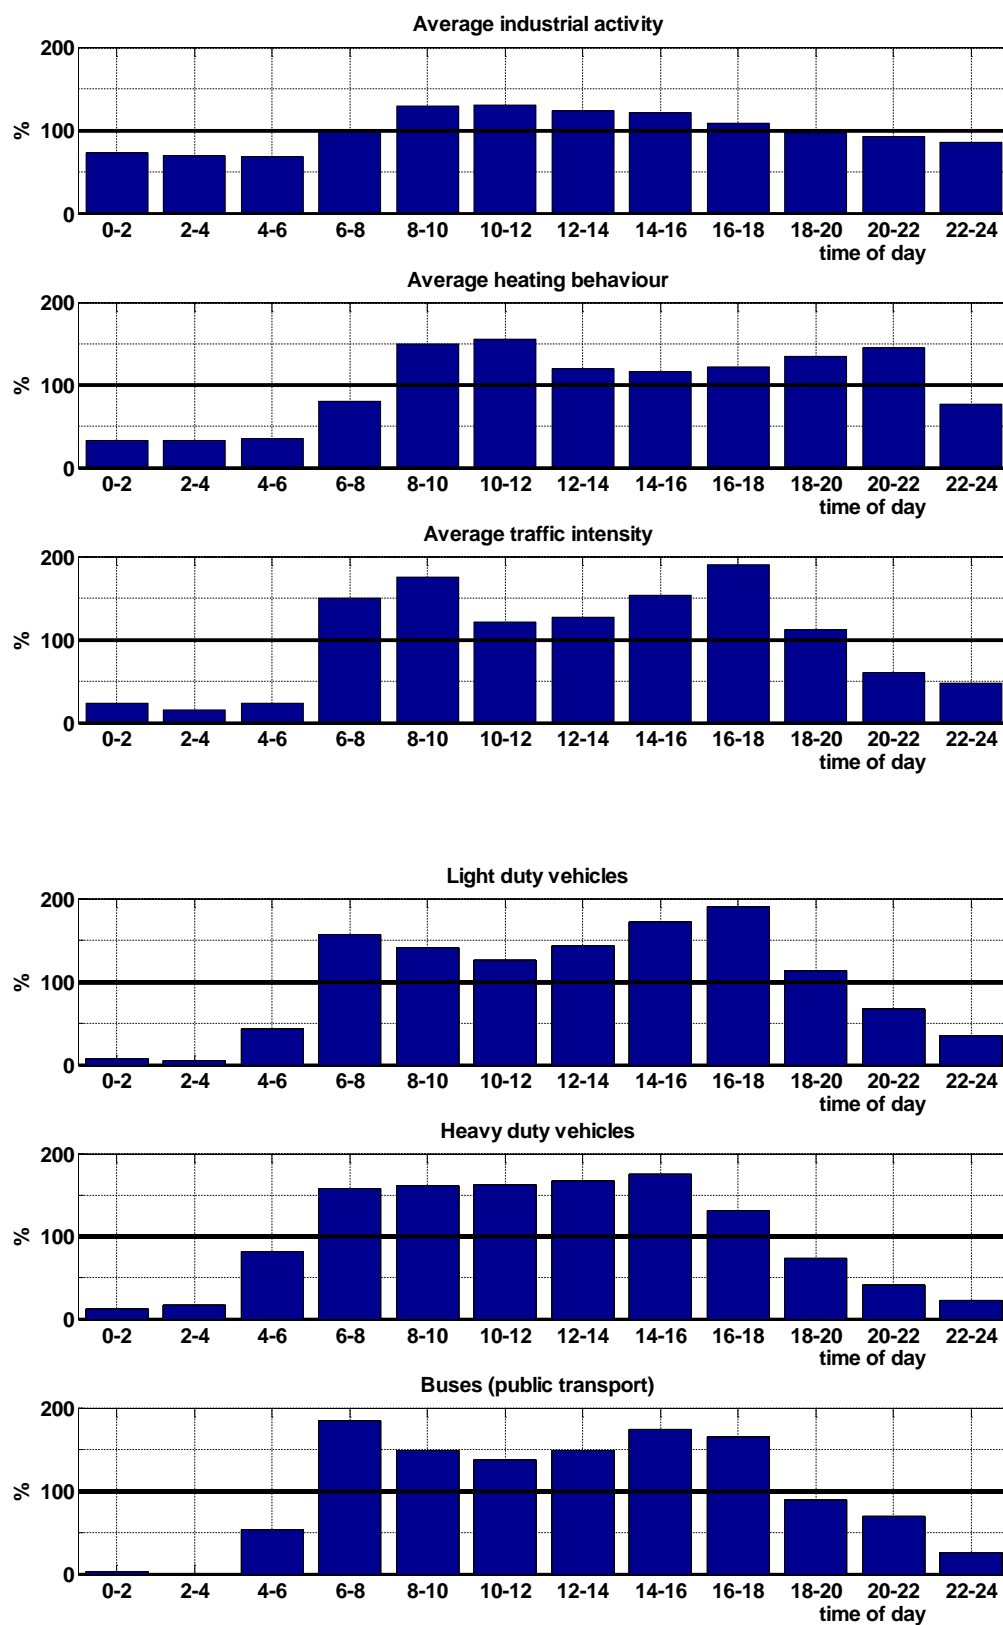


Figure 4.1 Relative emission strength (%) for different source types in the course of the day.

### Daily emission variations – specific approach for agricultural ammonia

In case of ammonia emission from animal housings or manure application, the model itself calculates the daily variation of the ammonia emission. To distinguish between emissions from animal housings and manure application, daily variations codes 4 and 5 are used (see sections 0 and 4.3.4).

### Seasonal emission variations

The OPS model supports only one type of seasonal emission variation, the variation of emission due to space heating in houses and buildings. This seasonal variation is automatically switched on if the daily variation for space heating is selected for an emission source. The seasonal effect on space heating emissions is modelled on the basis of so called degree-day values in combination with a wind speed correction:

$$stc = (19^\circ - T_{24}) (u_{10}/3.2)^{0.5} \quad \text{if } T_{24} < 12^\circ \text{C} \quad (4.1)$$

in which  $T_{24}$  is the daily average outdoor temperature in  $^\circ\text{C}$  and  $u_{10}$  the wind speed at a height of 10 m in m/s (here we use a lower bound of 1 m/s);  $stc$  is taken to be zero if  $T_{24} \geq 12^\circ\text{C}$ .

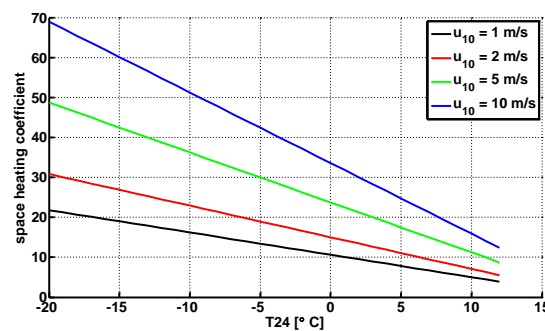


Figure 4.2 Space heating coefficient as function of daily average outdoor temperature for different values of wind speed  $u_{10}$ .

Average  $stc$  values are calculated with the meteorological pre-processor for each meteorological class and included in the meteorological data set. The correction of the space heating emission is carried out in OPS by first normalising  $stc$  with a long-term average value of  $stc$ .

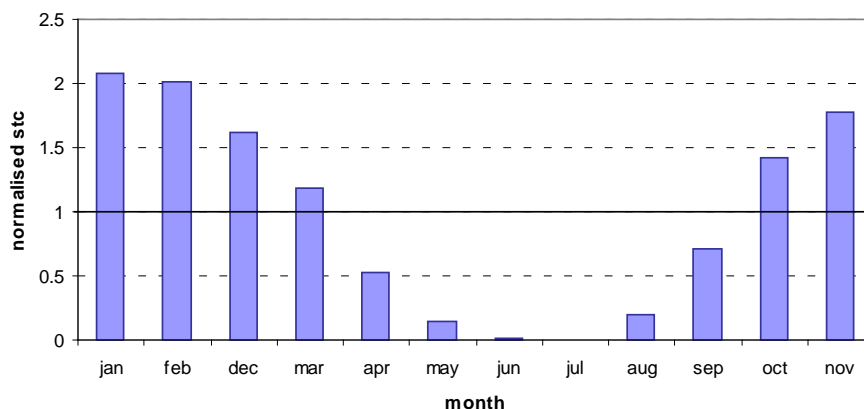


Figure 4.3 Monthly variation in space heating emission relative to long-term average emission.

Figure 4.3 gives the monthly variation in the normalised  $stc$ . These results are averages for the 1978-1991 period. Specific yearly mean values of the normalised  $stc$  may differ from 1, indicating warmer or colder winter seasons. The effect of seasonal variation may be illustrated in the  $\text{NO}_x$  emission due to space heating, which is in the order of 5% of the total emissions on a yearly basis. In a specific (cold) winter month an emission of this kind may amount up to 25% of the total emission. If this is combined with the daily emission variation and the phenomenon that dispersion is low when these emissions are high (early morning and evening), the influence of variations in space heating emissions




on atmospheric concentrations are clearly very significant. In order to take advantage of the different time-related variations, it is important to specify space heating and traffic-related emissions as separate source categories in the emission data file.

## 4.2 Emission speciation

The model distinguishes two types of emissions: gaseous and particulate. In the case of gaseous emissions, the rise of hot plumes is accounted for but the effect of cold and/or dense plumes (e.g. spills of liquefied gases) is not taken into account.

For particulate emissions, the emission is considered to be distributed over six particle-size classes, namely:

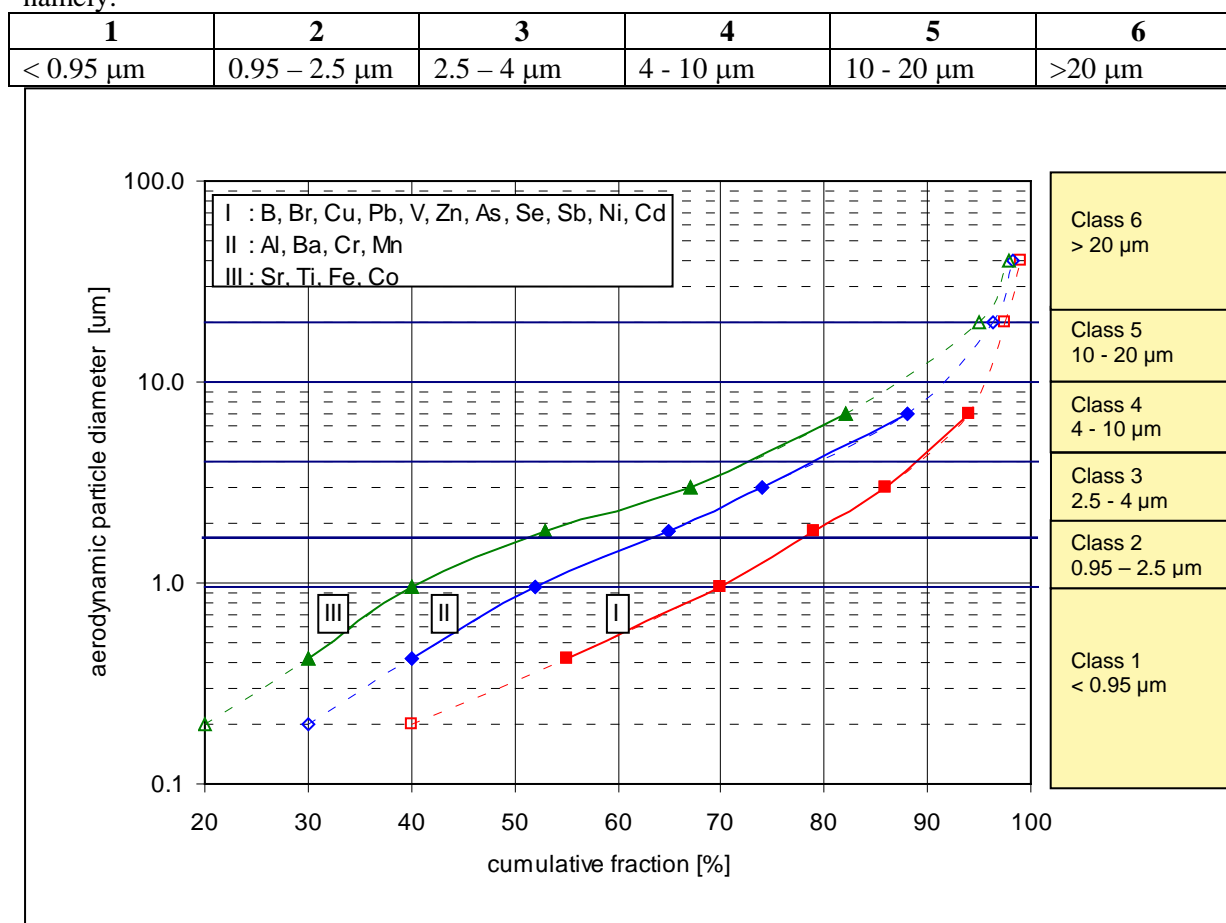

**Figure 4.4** Particle-size distributions for a number of elements measured in background concentrations, and classified into three groups (Potma et al., 1986). After log-normal extrapolation these distributions are also taken to be representative of source emissions. The particle-size classification used in the OPS model is given at the right-hand side.

The model calculates concentration and deposition for these classes separately, with size specific properties for each class. The model is delivered with standard distributions. The distributions fine, medium and coarse (Figure 4.4, Table 4.1) are intended for modelling the dispersion and deposition of particle bound substances, like heavy metals. In addition to these general distributions, sector-specific distributions are available for  $\text{PM}_{10}$ . Because the sector-specific distributions might change from year to year - due to changing contributions of the underlying activities to the emission of a sector - they

are not published here, but are available from the OPS website. In addition to choosing one of these model-included distributions, the user can specify up to 999 user-defined particle distributions.

In calculating the concentrations and depositions for the heaviest particles ( $> 20 \mu\text{m}$ ), allowance is made for the fact that the sedimentation velocity of these particles is not insignificant, so that plume descent occurs with distance. This plume descent is not influenced by the stratification of the lower boundary layer. The sedimentation velocity  $v_s$  (m/s) is computed according to Stokes law:

$$v_s = \frac{(\rho_{\text{particle}} - \rho_{\text{air}})(D_{\text{particle}})^2 g}{18\mu_{\text{air}}}, \quad (4.2)$$

with

$\rho_{\text{particle}}$  density of particle ( $\text{kg/m}^3$ )  
 $\rho_{\text{air}}$  density of air ( $\text{kg/m}^3$ )  
 $D_{\text{particle}}$  diameter of particle (m)  
 $g$  acceleration of gravity ( $\text{m/s}^2$ )  
 $\mu_{\text{air}}$  dynamic viscosity of air ( $\text{kg/(s m)}$ ).

It is important to note that the particle size distribution must be specified for the moment that particles become airborne. Distributions measured in ambient air usually do not show the heavier particles because their atmospheric lifetime is shorter than smaller particles.

*Table 4.1 Sedimentation velocity and standard particle-size distributions, for standard particle classes as used in OPS. Sedimentation velocity according to Stokes law for  $\rho_{\text{particle}} = 1000 \text{ kg/m}^3$ ,  $\rho_{\text{air}} = 1.205 \text{ kg/m}^3$  ( $T = 20 \text{ C}$ ),  $\mu_{\text{air}} = 1.81 \cdot 10^{-5} \text{ kg/(s m)}$ .*

particle size class		1	2	3	4	5	6
size range	$\mu\text{m}$	<0.95	0.95-2.5	2.5-4	4-10	10-20	>20
mass median diameter	$\mu\text{m}$	0.2	1.6	3	6	14	40
sedimentation velocity Stokes law	cm/s	0.00	0.01	0.03	0.11	0.59	4.81
standard distribution fine	%	70	12	8	5.5	2.5	2
standard distribution medium	%	53	16	12	11.5	4.2	3.3
standard distribution coarse	%	42	19	14	14.5	5.9	4.6

## 4.3 Emission processes

Emission processes described here are

- plume rise of hot effluent
- inversion penetration of plumes
- $\text{NH}_3$  from land spreading
- $\text{NH}_3$  emissions from animal housing systems.

### 4.3.1 Plume rise

Many models are available for the calculation of the rise of hot effluent from stacks, e.g. final rise models as proposed by Briggs (1971, 1975) or Weil (1985). These models incorporate some of the complex physics of the convective boundary layer. In the past, two approaches have been applied in the OPS model, one based on Briggs (1971) and one based on Briggs (1975). The Briggs (1975) approach is described in Van Jaarsveld (1995). In general terms, the Briggs (1971) approach is not only simpler but proved to provide better results after comparing model results with results of dispersion experiments. For this reason and because it is already applied for many years in the Dutch National Model (TNO, 1976) it is selected again for the present model.

The final plume rise  $\Delta h$  for **convective** and **neutral** conditions ( $L < 0$  or  $|L| > 50$  m) is calculated as:

$$\Delta h = 38.8 \frac{F_b^{3/5}}{u} \quad \text{for } F_b \geq 55, \quad (4.3)$$

$$\Delta h = 21.1 \frac{F_b^{3/4}}{u} \quad \text{for } F_b < 55, \quad (4.4)$$

where  $u$  is the ambient wind speed and  $F_b$  the stack buoyancy flux [ $\text{m}^4 \text{s}^{-3}$ ], which is given by:

$$F_b = \frac{g}{\pi} V_f \left(1 - \frac{T}{T_s}\right) \quad \text{or} \quad F_b = 8.8 Q_h. \quad (4.5)$$

Here,  $V_f$  is the volumetric flow rate of the stack gas [ $\text{m}^3 \text{s}^{-1}$ ],  $T$  the absolute ambient temperature [K] at stack height and  $T_s$  the temperature of the stack gas.  $Q_h$  is the heat output of the stack in MW.

Note that the wind speed  $u$ , is evaluated at the stack top  $h_s + \frac{1}{2} \Delta h$ ; this means that an iteration is needed in order to resolve the interdependency between plume rise and wind speed.

For **stable** conditions ( $0 \leq L \leq 50$ ), the final plume rise is given by:

$$\Delta h = 2.6 \left(\frac{F_b}{s u}\right)^{1/3} \quad \text{with stability parameter } s = \frac{g}{T} \frac{\partial \theta}{\partial z}, \quad (4.6)$$

where  $\partial \theta / \partial z$  is the potential temperature gradient at stack level.  $\partial \theta / \partial z$  at stack height may vary, dependent on the stability in the surface layer. For lack of actual observations, an average value of  $0.006 \text{ K m}^{-1}$  is taken as representative for stable situations (TNO, 1976). Near the source, the plume may not have reached its final plume rise. The initial plume rise is usually evaluated using an  $x^{2/3}$  dependence. (e.g. Berkowicz et al., 1986). Under the assumption that, on average, the vertical rise goes faster than the (downward) vertical plume growth, the final plume rise is considered to be instantaneously reached.

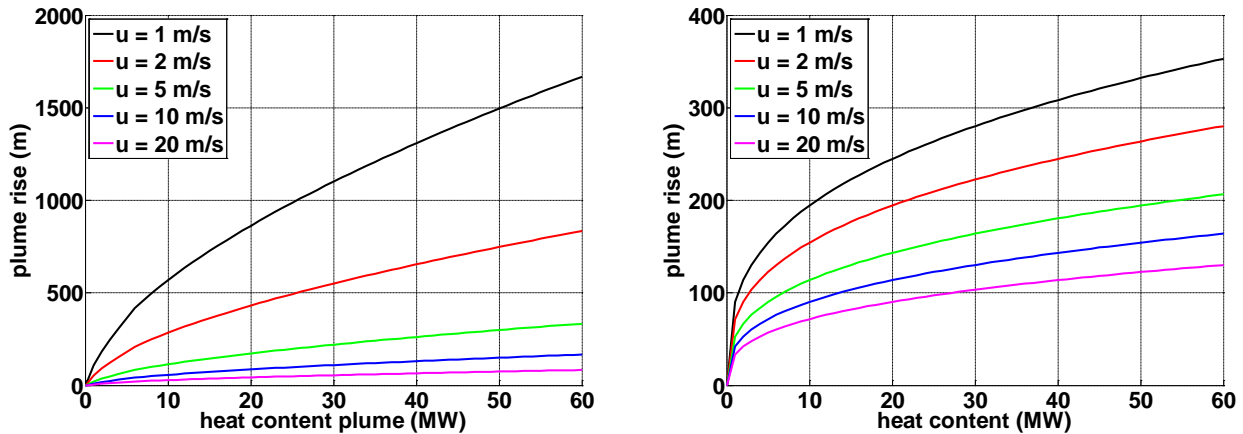


Figure 4.5 Plume rise as function of heat content of the plume for different values of wind speed  $u$ . Convective/neutral conditions (left panel) or stable conditions (right panel). Note the different scales for the y-axis for the two panels.

Note that the plume rise described above is for high stacks. For sources, emitting at lower elevation, the value of  $\partial \theta / \partial z$  can be much larger, especially in stable conditions.

### 4.3.2 Inversion penetration

The interaction of buoyant plumes with the top of the mixing layer can be described by models such as given by Manins (1979) or Briggs (1985). Both these relations assume a (thin) temperature inversion at mixing height  $z_i$  which can only be passed if the dissipation rate of the plume is still high enough after rising from  $h_s$  to  $z_i$ , but they differ strongly on the degree of penetration. Situations with strong (subsident) temperature inversions at low altitudes sometimes occur, leading to trapping of pollutants emitted by high

stacks (Moore, 1987). Temperature jumps at  $z_i$  are, however, rather small in most situations, especially under neutral conditions.

In OPS, a classification into stability and mixing-height classes has been chosen (see Table 1.1), mainly to include effects of vertical stratification on a local scale, where each meteo class has a representative ensemble mixing height  $z_i$ . The following simple distribution scheme has been chosen to model the process of plume penetration:

$$f_m = \frac{z_i - (h_s + \Delta h)}{\Delta h} + c_i \quad \text{if } h_s \leq z_i, \quad (4.7)$$

$$f_m = \frac{z_i - (h_s + \Delta h)}{z_i} + c_i \quad \text{if } h_s > z_i, \quad (4.7a)$$

$$f_m = \min(\max(0, f_m), 1), \quad (4.7b)$$

where  $f_m$  is the fraction of the plume in the mixing layer ( $0 \leq f_m \leq 1$ ),  $h_s$  the stack height [m],  $\Delta h$  the plume rise [m] and  $c_i$  an empirical constant representing the trapping effect. For neutral situations  $c_i$  is 0.5, indicating no trapping at all. In stable and unstable cases  $c_i$  is taken as 0.85. This distribution scheme only affects concentration in the mixing layer on a local scale. As is pointed out earlier (section 1.3.3), plumes that are originally emitted above the mixing layer may enter the mixing layer at a later stage e.g. due to fumigation. It is assumed for these cases that plume heights do not change during transport above the mixing layer and also that vertical dimensions remain small.

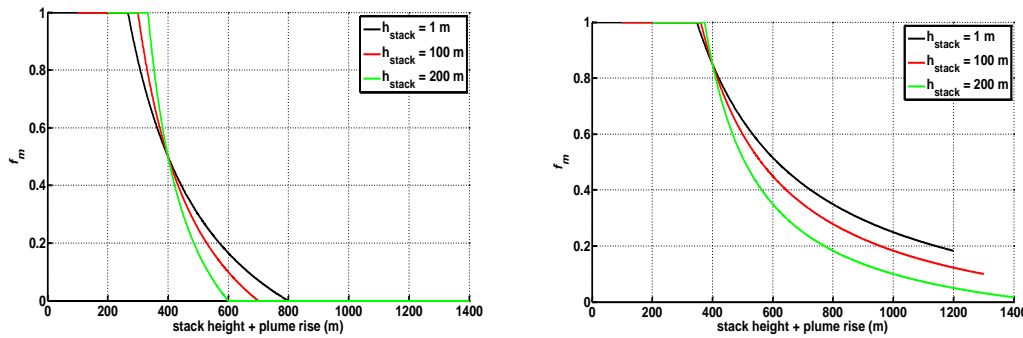


Figure 4.6  $f_m$  = fraction of plume inside mixing layer ( $z_i = 400$  m), as function of total plume height ( $h_s + \Delta h$ ) for different values of stack height  $h_s$ . Neutral conditions:  $c_i = 0.5$  (left panel); stable and unstable conditions:  $c_i = 0.85$  (right panel).

### 4.3.3 NH<sub>3</sub> emissions from manure application

The DEPASS model (Dynamic Exchange of Pollutants between Air and Soil Surface) is developed in order to describe the vertical transport and diffusion in both soil and atmosphere, and the exchange of pollutants between the compartments in relation to actual meteorological conditions. The model is described in Van Jaarsveld (1996). The following correction factor (relative to the average emission strength) for the NH<sub>3</sub> emission strength of land-spread manure was derived on the basis of this model and using a regression analysis of emissions and meteorological parameters:

$$EC_{spread} = f_1(P_p) f_2(R_a, R_b, T) \quad (4.8)$$

$$f_1(P_p) = \min(\max(0.5, (1.069 - P_p)^2), 1.5) \quad (4.9)$$

$$f_2(R_a, R_b, T) = 1.55 \cdot 10^{-5} [ (100 / (R_a(4) + R_b))^{0.8} (T + 23)^{2.3} ]^{1.25}, \quad (4.10)$$

in which  $P_p$  is the rain probability [-],  $T$  is the ambient temperature [°C],  $R_a(4)$  the aerodynamic resistance of the lower 4 m of the atmosphere [s/m] and  $R_b$  the pseudo-laminar layer resistance [s/m]. Basically, the effect of wind speed and atmospheric stability is included in the aerodynamic resistance. Note that soil properties, such as pH, are not taken into account here. On average, the factor varies from approx. 0.4 in January to 1.5 in July. Note that for a specific model run, the emission total may change due to this correction factor.

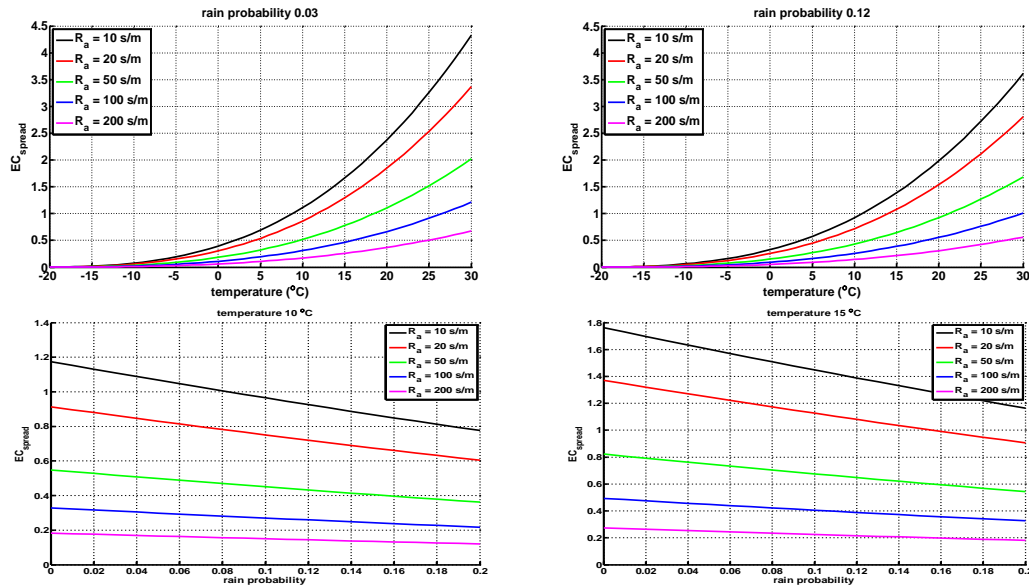


Figure 4.7 Correction factor for the  $\text{NH}_3$  emission of land-spread manure ( $EC_{\text{spread}}$ ) as function of temperature (upper panels) or rain probability (lower panels) for different values of  $R_a$ .  $R_b = 25 \text{ s/m}$ .

The parameterisation of the relative emission strength of manure applied to the surface, as incorporated in the OPS model, has been first applied in a study on emission–deposition relations in the Netherlands (Van Jaarsveld *et al.*, 2000). The most striking result is the difference between the impact of emissions of animal housing systems and emissions due to land-spreading of manure. This is one of the reasons why the effect of emission reduction measures (mainly incorporating manure into the soil top layer) did not show up in measured ammonia concentrations in the Netherlands.

Besides a correction factor for land-spreading emissions describing variations in volatilisation relative to yearly averages, one might consider an activity correction factor. This is of major importance if the model is used on a monthly basis, because there is a distinct seasonal pattern in the application of manure to the field. However, such a correction can be applied afterwards and is therefore not included in the present model.

Because the volatilisation of  $\text{NO}_x$  from applied manure and fertiliser is driven by the same processes as that of  $\text{NH}_3$ , the relationships derived for  $\text{NH}_3$  are also applied to  $\text{NO}_x$  emissions from these activities.

#### 4.3.4 $\text{NH}_3$ emissions from animal housing systems

For emissions related to animal housing systems, a dependency has been chosen on the basis of measurements of Kroodsmas *et al.* (1993) and Groot Koerkamp and Elzing (1996). The correction factor is:

$$EC_{\text{house}} = \max(1 + 0.0294 (T - T_{\text{avg}}), 0.2) \quad (4.11)$$

where  $T$  is the outdoor temperature and  $T_{\text{avg}}$  the (long-term) average outdoor temperature ( $T_{\text{avg}} = 10 \text{ }^\circ\text{C}$ ).

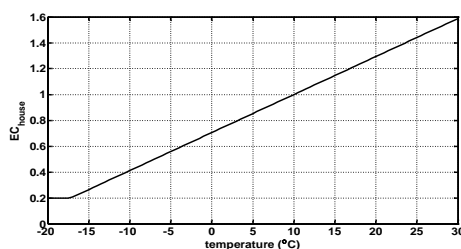


Figure 4.8 Correction factor (relative to the average emission strength) for the  $\text{NH}_3$  emission strength of animal housing systems ( $\text{EC}_{\text{house}}$ ) as function of temperature.

The average correction factor for emissions from animal housing systems is approximately 1.3 in July and 0.7 in January. Note that for yearly runs, the emission total for a year with an average temperature other than 10 °C, changes. This kind of emission is clearly less influenced by meteorology than land-spreading emissions. The factor 0.0294 is, in fact, based on relations with indoor temperatures in a mechanically ventilated cattle-housing system. In the present model it is assumed that the temperature variations for indoor and outdoor are equal, which probably leads to an overestimation of the temperature effect. Moreover, there is also no distinction made between housing systems for cows, pigs or poultry, or between naturally or forced ventilated systems. Neither is a dependency of the ventilation rate on outdoor wind speed included.

Because the volatilisation of  $\text{NO}_x$  from animal housings is driven in the same way as that of  $\text{NH}_3$ , the relationships derived for  $\text{NH}_3$  are also applied to  $\text{NO}_x$  emissions from animal housings.

## 4.4 References

- Berkowicz R., Olesen H.R. and Torp U. (1986) The Danish Gaussian Air Pollution Model (OML): description, test and sensitivity analysis in view of regulatory applications. In: De Wispelaere C., Schiermeier F.A. and Gillani N.V., editors. Air pollution modeling and its application V. Plenum Press, New York. p. 453-482.
- Briggs G.A. (1971) Some recent analyses of plume rise observation. Proceedings. 2nd Intern. Clean Air Congress, H.M. Englund and W.T. Berry (Eds.), Academic Press, New York, 1029-1032.
- Briggs G.A. (1975) Plume rise predictions. In: Lectures on Air Pollution and Environmental Impact Analysis. American Meteorological Society, Boston MA. 59-111.
- Briggs G.A. (1985) Analytical parameterisations of diffusion: The convective boundary layer. J. Climate Appl. Meteorol. 24, 1167-1186.
- Groot Koerkamp, P.W.G. and Elzing A. (1996) Degradation of nitrogenous components in and volatilization of ammonia from litter in aviary housing systems for laying hens. Transactions of the ASAE, Vol. 39.
- Kroodsmas, W., Huis in 't Veld, J.W.H. and Scholtens, R. (1993) Ammonia emission and its reduction from cubicle houses by flushing. Livestock Production Sci. 35:293-302.
- Manins P.C. (1979) Partial penetration of an elevated inversion layer by chimney plumes. Atmospheric Environment 13, 733-741.
- Moore D.J. (1987) Conditions in which power stations contribute to high ground level  $\text{SO}_2$  concentrations in the U.K. Atmospheric Environment 21, 1849-1855.
- Potma C.J., Onderdelinden D. and Slanina J. (1986) Bijdrage van een kolengestookte elektriciteitscentrale aan de lokale luchtconcentratie- en depositieniveaus. PEO report NOK-LUK 3, no. 20.70-017.10, RIVM report 22822 02 004, Bilthoven.
- TNO (1976) Modellen voor de berekening van de verspreiding van luchtverontreiniging inclusief aanbevelingen voor de waarden van parameters in het lange-termijnmodel. Staatsuitgeverij, The Hague, the Netherlands.
- Van Jaarsveld J. A. (1995) Modelling the long-term atmospheric behaviour of pollutants on various spatial scales. Ph.D. Thesis, Utrecht University, the Netherlands.
- Van Jaarsveld J.A. (1996) The dynamic exchange of pollutants at the air-soil interface and its impact on long range transport In: Air Pollution Modeling and its application XI, edited by Sven-Erik Gryning and Francis Schiermayer.
- Van Jaarsveld, J.A., Bleeker, A. and Hoogervorst, N.J.P. (2000) Evaluatie ammoniakredukties met behulp van metingen en modelberekeningen. RIVM rapport 722108025, RIVM, Bilthoven.
- Weil J.C. (1985) Updating applied diffusion models. J. Climate Appl. Meteorol. 24, 1111-1130.

## 5. Dry deposition

### *Deposition flux and deposition velocity*

The vertical transport of atmospheric contaminants - either in gaseous or in particle form - to or from the underlying surface is governed by a number of processes. Some of these are determined by atmospheric properties common to all contaminants and others by specific physical and chemical properties of the gases in conjunction with properties of the surface. The vertical exchange flux  $F_d$  in this model is described as the product of a vertical velocity  $v_d$  specified for a height  $z$ , and the difference in concentration at this height,  $\chi_a$ , and the surface or substrate concentration  $\chi_s$ :

$$F_d = v_d(z) [\chi_a(z) - \chi_s]. \quad (5.1)$$

For substances which immediately react at the surface with other substances or for substances attached to particles,  $\chi_s$  may be considered zero. However, for substances such as ammonia or persistent organic pollutants (POPs),  $\chi_s$  may be so high under specific conditions that the vertical flux is upward (Van Jaarsveld *et al.*, 1994). In that case Eq. (5.1) describes the emission flux. For gases such as nitrogen oxide (NO) this may be the case for most ecosystems (Duyzer and Fowler, 1994). In an electrical analogue  $v_d(z)$  can be represented as a contaminant conductivity, which can be expressed as the inverse of resistances:

$$v_d(z) = [R_a(z) + R_b + R_c]^{-1}. \quad (5.2)$$

The sequence of the three resistances represents the resistances in the three stages of vertical transport, i.e. (1) for the turbulent layer, the aerodynamic resistance  $R_a$ , (2) for the layer immediately adjacent to the surface, the pseudo-laminar layer resistance  $R_b$ , and (3) for the receptor the surface resistance  $R_c$ .

Note that OPS computes deposition at two different locations:

- along the transport trajectory (using parameters averaged along the trajectory); see section 5.2;
- at the receptor (using local parameters at the receptor's site).

### *Aerodynamic resistance $R_a$*

The resistance  $R_a$  depends mainly on the local atmospheric turbulence. Hicks *et al.* (1989) assume that the atmospheric resistance to transport of gases and small particles is similar to that of heat. Here Wesely and Hicks (1977) are followed; they approximate  $R_a$  by:

$$R_a(z) = \frac{1}{\kappa u^*} \left[ \ln \left( \frac{z}{z_0} \right) - \psi_h \left( \frac{z}{L} \right) + \psi_h \left( \frac{z_0}{L} \right) \right], \quad (5.3)$$

where  $\psi_h(z/L)$  is the stability correction for heat, which is related to the dimensionless temperature gradient  $\phi_h$  (see Eq. (3.22) and (3.23):

$$\psi_h \left( \frac{z}{L} \right) = \int_0^{\frac{z}{L}} \left( \frac{1 - \phi_h(\zeta)}{\zeta} \right) d\zeta, \quad (5.4)$$

which can be approximated by (Beljaars and Holtslag, 1990):

$$\psi_h \left( \frac{z}{L} \right) = 2 \log \left[ 0.5 \left( 1 + \sqrt{1 - 16 \frac{z}{L}} \right) \right] \text{ for } L \leq 0, \quad (5.5)$$

$$\psi_h \left( \frac{z}{L} \right) = -0.7 \frac{z}{L} - \left( 0.75 \frac{z}{L} - 10.72 \right) \exp \left( -0.35 \frac{z}{L} \right) - 10.72 \text{ for } L > 0. \quad (5.6)$$

Strictly speaking, the aerodynamic resistance is the resistance between height  $z$  and the zero plane displacement  $d$  [m], however, in OPS,  $d$  is set to zero.

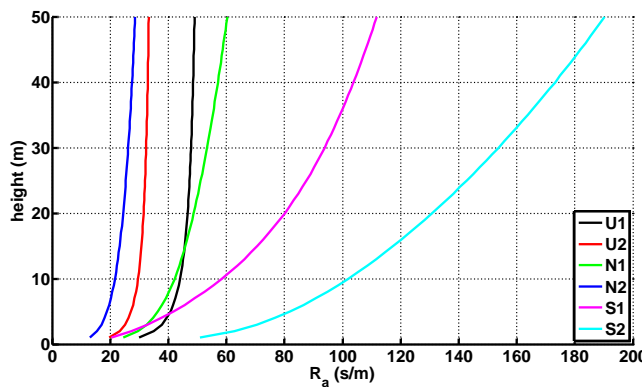


Figure 5.1 vertical profile of aerodynamic resistance for the stability/mixing height classes used in OPS. Values of  $u^*$ ,  $L$  are from Table 2.5,  $z_0 = 0.03$  m.

#### Pseudo-laminar layer resistance $R_b$

The resistance  $R_b$  depends on both turbulence characteristics and molecular diffusion of the contaminant considered. Investigations of the pseudo-laminar layer resistance show that  $R_b$  is strongly influenced by the diffusivity of the material being transferred and the rigidity of a rough surface (Garratt and Hicks, 1973; Brutsaert, 1975). The value of  $R_b$  is approximated by Wesely and Hicks (1977); Hicks *et al.* (1987):

$$R_b = \frac{2}{\kappa u^*} \left( \frac{N_{Sc}}{N_{Pr}} \right)^{\frac{2}{3}}, \quad (5.7)$$

where  $N_{Sc}$  and  $N_{Pr}$  are the Schmidt and Prandtl numbers respectively.  $N_{Pr}$  is  $\sim 0.72$ , while  $N_{Sc}$  is defined as:  $N_{Sc} = \nu/D_g$ , with  $\nu$  being the kinematic viscosity of air ( $0.15 \times 10^{-2} \text{ m}^2 \text{ s}^{-1}$ ) and  $D_g$  the molecular diffusivity in air [ $\text{m}^2 \text{ s}^{-1}$ ]. The pre-processor of the model calculates  $R_b$  for  $\text{SO}_2$  only. Since the ratio of diffusion coefficients in air for different substances is proportional to the root of their molecule masses  $M_m$ , the ratio of their  $R_b$  values can be expressed as:

$$R_{b_i} = R_{b_j} \left( \frac{M_{m_i}}{M_{m_j}} \right)^{\frac{1}{3}}, \quad (5.8)$$

where the subscripts  $i$  and  $j$  denote substances  $i$  and  $j$ .

#### Surface or canopy resistance $R_c$

Substance and receptor characteristics determine  $R_c$ , which for vegetation can be seen as the replacement resistance of a number of other resistances such as stomatal, mesophyll, cuticular and water-layer resistances (Erisman, 1992, Wichink Kruit *et al.*, 2007, 2010). In the case of deposition to water or bare soil,  $R_c$  represents all resistances due to diffusion and transport in the water or soil column. In OPS, the surface resistance for gases is provided by the DEPAC module (Van Zanten *et al.*, 2010). For  $\text{PM}_{10}$ , deposition velocities are specified as function of the particles size, whereas for some specific acidifying aerosols, the approach of Wesely *et al.* (1985) and Ruijgrok *et al.* (1993) has been followed.

#### Vertical gradient

Through the depletion of material at the surface, a process of material redistribution within the mixing layer will be induced. This redistribution will be driven by vertical turbulent diffusion or, inversely, limited by the aerodynamic resistance of the lower part of the mixing layer. However in general, the net result of these competing processes is that the concentration at the surface will decrease more than the average concentration in the mixing layer. Vertical concentration gradients can be very strong, especially



for substances which have a low surface resistance or during stable atmospheric conditions, when  $R_d(z)$  is very large. Measurements at the Cabauw meteorological tower (Van Dop *et al.*, 1980; Onderdelinden *et al.*, 1984) confirm the existence of large gradients. For  $\text{SO}_2$  under stable night-time conditions, for example, a ratio between the concentration at the 4-m level and the 100-m level of about 0.3 was found. In a steady-state situation, the vertical deposition flux  $F_d$  in the lower part of the boundary layer can be considered as independent of height:

$$F_d(z_2) = F_d(z_1), \quad (5.9)$$

or (assuming  $\chi_s = 0$ ):

$$v_d(z_2) \chi(z_2) = v_d(z_1) \chi(z_1). \quad (5.10)$$

The concentration ratio between the two levels  $z_1$  and  $z_2$  can then be given as (Van Egmond and Kesseboom, 1983):

$$g_{z_2}^{z_1} = \frac{\chi(z_1)}{\chi(z_2)} = \frac{R_a(z_1) + R_b + R_c}{R_a(z_2) + R_b + R_c}. \quad (5.11)$$

Scriven and Fisher (1975) describe the relation of  $v_d$  with height in a similar way, however, without the stability corrections which are applied for the calculation of  $R_a(z)$ . For situations where the gradient is not fully developed, i.e. close to a source or when stability goes from unstable to stable, it is assumed that the atmosphere is acting in analogy to an electric capacitor which is unloaded by a resistor. The first-order time constant,  $\tau$ , for such a circuit can be characterised by a simple  $R_c C_c$  value, where  $R_c$  is the electrical equivalent for the aerodynamic resistance over a layer and  $C_c$  the electrical equivalent for the height of that layer. The concentration profile, which depends on the distance  $x$  to the source, can now be given as:

$$\frac{\chi(x, z_1)}{\chi(x, z_2)} = g_{z_2}^{z_1} + (1 - g_{z_2}^{z_1}) \exp\left(-\frac{t}{\tau}\right), \quad (5.12)$$

in which:

$$t = \frac{x}{u} \quad \text{and} \quad \tau = \frac{z_1}{v_d(z_1)}. \quad (5.13)$$

For reason of simplicity, a single height of 50 m was chosen for  $z_2$  in line with Van Egmond and Kesseboom (1983). This height may be considered as an upper limit for very stable situations since the nocturnal boundary layer height in such situations is also of the order of 50 m (Nieuwstadt, 1984). Values for  $\tau$  can range from 8 minutes, in the case of unstable atmosphere, to more than 30 minutes in case of stable situations. A value of  $z_1 = 4$  m has been fixed as receptor height in the OPS model, representative for the height of most LML stations.

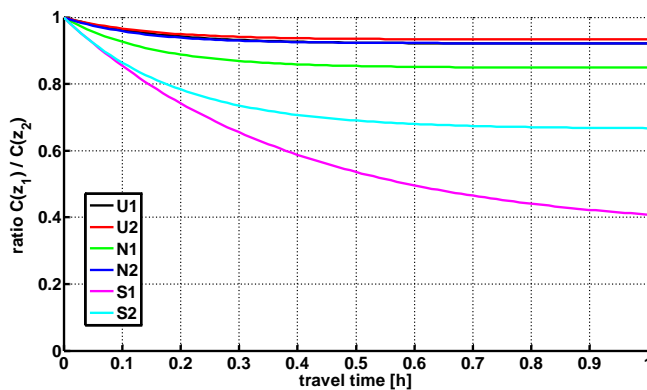


Figure 5.2 vertical concentration gradient (concentration at 4 m compared to 50 m) as function of travel time for the stability/mixing height classes used in OPS. Values of  $u^*$ ,  $L$ ,  $R_a$  are from **Table 2.5**,  $R_b$  is computed according to Eq. 5.7, for  $R_c = 100$  s/m,  $z_0 = 0.03$  m.

## 5.1 Land use and roughness length

Land use and roughness length  $z_0$  are important parameters in the modelling of dry deposition. At present, the DEPAC module contains parameterisations for the nine land-use types given in Table 5.1.

*Table 5.1 Land-use classes distinguished in DEPAC with percentage of occurrence in the Netherlands.*

Code	Land-use type	%
1	Grass land	<b>37.1</b>
2	Arable land	<b>24.3</b>
3	Permanent crops (orchards)	<b>1.2</b>
4	Coniferous forest	<b>4.2</b>
5	Deciduous forest	<b>6.2</b>
6	Water	<b>13.2</b>
7	Built-up area	<b>11.1</b>
8	Heather and other nature	<b>2.4</b>
9	Bare soil	<b>0.3</b>

Land use and roughness length maps are available in several resolutions, the highest at present being 250 x 250 m<sup>2</sup>. The OPS model selects the required resolution depending on the chosen output resolution.

The land use data in the DEPAC partition are derived from basic land use data, distinguishing 39 different land use types with a resolution of 25 x 25 m<sup>2</sup> (LGN7, Hazeu et al. 2014). The  $z_0$  maps with the same resolution as the land use maps are created by averaging drag coefficients for the LGN7 land use types in each grid cell. We use here the simplified form of the drag coefficient

$$C_d = \left( \frac{\kappa}{\ln\left(\frac{z_{ref}}{z_0}\right)} \right)^2, \quad (5.14)$$

with  $\kappa$  the Von Karman constant ( $= 0.4$ ),  $z_{ref} = 10$  m.

Roughness length values for LGN land use type have been estimated in the HYDRA project (Verkaik, 2001).

Note that DEPAC is called twice in OPS: once for deposition at the receptor's site and once for the deposition along the trajectory. In the latter case, the average percentage of each land use class and average roughness are determined, averaged over 20 points along the trajectory. Up to version 4.5 of OPS, the roughness length for sample points outside the Netherlands was read from an European  $z_0$ -map (resolution 10 x 10 km<sup>2</sup>) based on Corine Land Cover data (CLC 2000) and land use was assumed to be grass. As of version 4.5, the Dutch land use and roughness maps are extended with the adjacent part of Belgium and Germany to improve the deposition along the trajectory for foreign sources close to the Dutch border. Corine Land Cover data (CLC2006) were used for this extension. Figure 5.3 shows the dominant land use in the DEPAC partition and the roughness length for the Netherlands and neighbouring parts of Belgium and Germany.

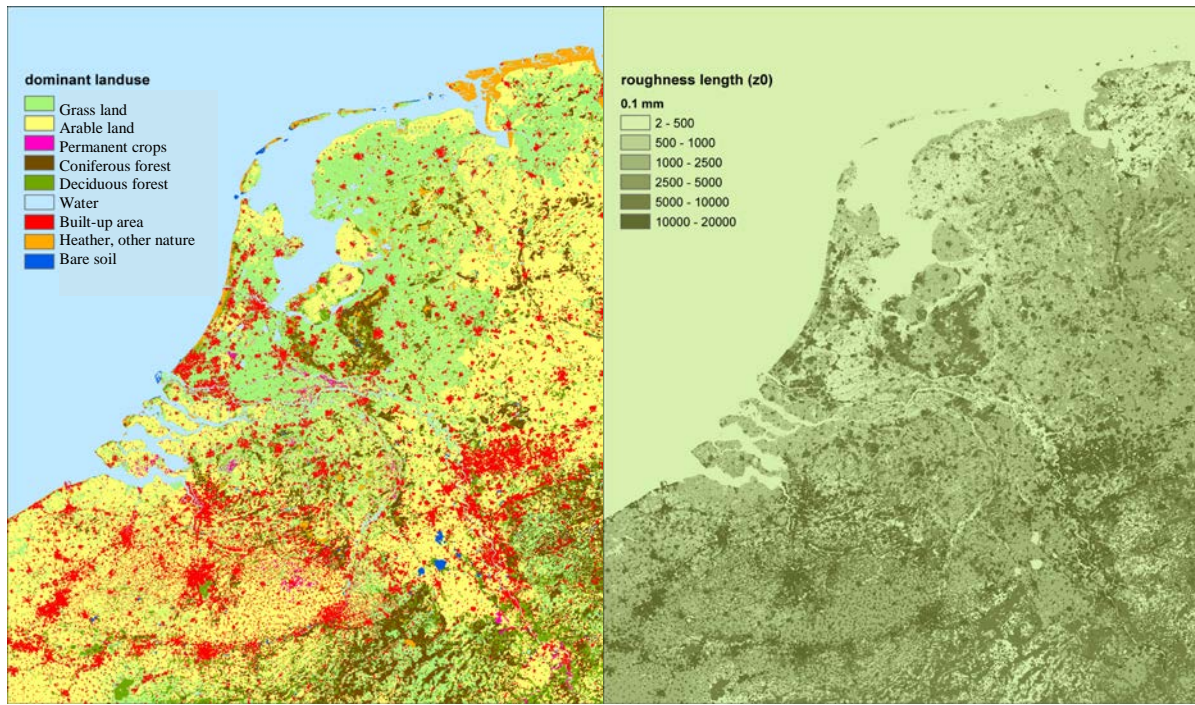


Figure 5.3: Dominant land use (DEPAC partition) and roughness length at  $250 \times 250 \text{ m}^2$ , derived from LGN7 for the Netherlands and CLC2006 for Belgium and Germany.

For sample points outside the domain of the extended maps  $z_0$ -values are still read from the European  $z_0$ -map and land use is still assumed to be grass.

## 5.2 Source depletion

In OPS, the chosen approach to account for the effect of deposition on the concentration in air can be described as ‘source depletion with surface correction’. Horst (1977) developed a so-called surface depletion model, in which he introduced small negative sources at the surface - representing the material lost by dry deposition - and calculated the resulting concentration profile as the sum of the contribution of the undepleted source and the contributions of the negative sources. Since the resulting concentration has to be determined numerically, the method is time consuming and as such is not suited for an analytical model as described here.

In a source depletion model, the loss of airborne material due to deposition is accounted for by appropriately reducing the source strength as a function of down-wind distance  $x$ . This is what is actually described by the following equation for the depleted source strength (or cross-wind integrated mass flux)

$\tilde{Q}(x)$  [ $\text{g s}^{-1}$ ], a removal rate  $k$  [ $\text{s}^{-1}$ ] and average wind speed  $\bar{u}$  (averaged over the trajectory) [ $\text{m s}^{-1}$ ]:

$$\tilde{Q}(x) = Q_0 \exp \left[ -k \frac{x}{\bar{u}} \right], \quad (5.15)$$

where  $Q_0$  [ $\text{g s}^{-1}$ ] is the undepleted source strength at  $x = 0$ .

A more general expression for Eq. (5.15) can be derived by computing mass fluxes in a mixing volume as shown in Figure 3.1 (dry deposition only).

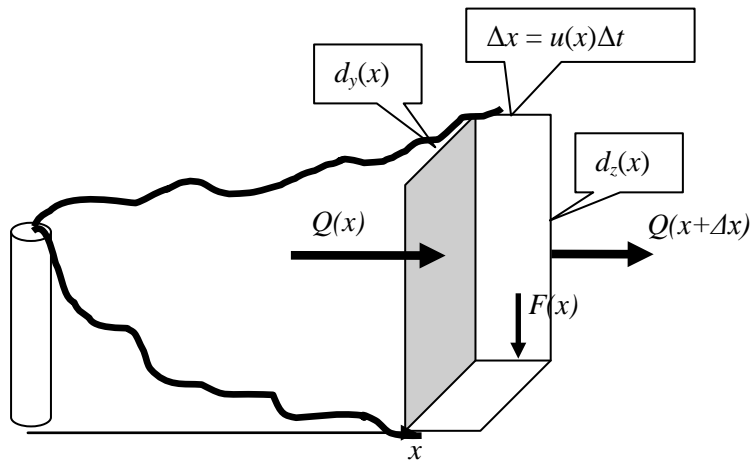


Figure 5.4 Mixing volume of plume at distance  $x$ , with mass flux  $Q(x)$  and deposition flux  $F(x)$ ; plume dimensions are given by  $\Delta x$ ,  $dy$  and  $dz$  [m].

The decrease in cross-wind integrated mass flux between the left side and the right side of the box is caused by the deposition flux  $F$  [ $\text{g}/(\text{m}^2\text{s})$ ]:

$$\tilde{Q}(x + \Delta x) - \tilde{Q}(x) = F(x) \Delta x d_y(x) = F(x) \Delta x \frac{1}{D_y(x)}. \quad (5.16)$$

The deposition flux  $F$  is (Eqs. 3.7, 3.10):

$$F(x) = -v_d C(x) = -v_d \frac{\tilde{Q}(x)}{u(x)} D_y(x) D_z(x). \quad (5.17)$$

This leads to the differential equation

$$\frac{1}{\tilde{Q}(x)} \frac{d(\tilde{Q}(x))}{dx} = -\frac{v_d}{u(x)} D_z(x), \quad (5.18)$$

with solution

$$\tilde{Q}(x) = Q_0 \exp \left[ - \int_0^x \frac{v_d}{\bar{u}} D_z(\xi) d\xi \right]. \quad (5.19)$$

As pointed out earlier, the expression  $D_z(x)$  depends on the ratio  $\sigma_z/z_i$ , ( $z_i$  mixing height [m]), resulting in either Eq. (3.9) or (3.15). In addition, the effective transport height has a tendency to increase with distance, also resulting in an increasing transport velocity  $\bar{u}$ . Therefore, the integral in Eq. (5.19) cannot be solved analytically for the entire range of  $x$ , but has to be split in two or more parts, representing the different stages in plume development from source to receptor. For this reason three stages are distinguished:

- I. Transport within an area source with radius  $r_a$ . The vertical dispersion within such a source is characterised by  $\sigma_{z,eff}(x)$  (Eq. (3.42)). This effective vertical dispersion parameter is almost independent of the position within the area source (see Figure 3.12). Therefore  $D_z(x)$  is approached by:

$$D_z(x) = \frac{2}{\sqrt{2\pi} \sigma_{z,eff}(x = r_a)}. \quad (5.20)$$

and the depleted source strength is

$$\tilde{Q}(x) = Q_0 \exp \left[ -v_d(z) \frac{x_d}{\bar{u}} \frac{2}{\sqrt{2\pi} \sigma_{z,eff}(x=r_a)} \right], \quad (5.21)$$

in which  $\bar{u}$  is the transport velocity taken at  $z = \sigma_{z,eff}(x)$ . The effective distance  $x_d$  over which deposition takes place within an area source is (assuming that, on average, the receptor lies halfway between the centre and the edge of the area source):

$$x_d = \left( \frac{r_a}{2} \right) \exp(-kt), \quad (5.22)$$

with  $k [s^{-1}]$  the total conversion rate for chemical conversion, wet deposition and dry deposition and  $t [s]$  the travel time from area source to receptor:  $t = (r_a/2)/u$ .

- II. The phase where the plume is not yet uniformly mixed in the mixing layer. This stage starts at  $x_s = 0$  in case of a point source or at  $x_s = r_a$  in the case of an area source. A separate description of this phase is especially important for low-level sources because of the enhanced ground-level concentrations close to the source.  $D_z(x)$  is given by Eq. (3.15). When the reflection against the top of the mixing layer is neglected at this point (Eq. (3.15) is dominated by the last term anyway),  $D_z(x)$  can be written as:

$$D_z(x) = \frac{2}{\sqrt{2\pi} \sigma_z} \exp \left[ \frac{-h^2}{2\sigma_z^2} \right]. \quad (5.23)$$

An approximation for the solution of Eq. (5.19) in combination with (5.23) is based on the assumption that  $\sigma_z^2 = 2K_z x / u$  (see 3.24), with the turbulent eddy diffusivity  $K_z [m^2/s]$ , that does not depend on the distance  $x$ . In appendix 5.6.1, the following expression is derived for the source depletion ratio between  $x_s$  and  $x$ :

$$\frac{\tilde{Q}(x)}{Q(x_s)} = \exp \left\{ -\frac{2\beta v_d(z) (x - x_s)}{\bar{u}} \frac{x C(x) u(x)}{Q_0} \frac{2\pi}{m_s} \right\}, \quad (5.24)$$

in which  $\bar{u}$  is the average transport speed (averaged over the trajectory),  $u(x)$  the wind speed at the location of the receptor and at transport height and

$$\beta = \frac{8\sigma_z^2}{\pi h^2 \left( 1 + \sqrt{1 + \frac{8\sigma_z^2}{\pi h^2}} \right)^2}. \quad (5.25)$$

- III. The phase where the plume is uniformly mixed in the mixing layer. This phase starts at a distance  $x_g$  from the source, where  $\sigma_z$  equals the (local) mixing height  $z_i$ . This distance is usually less than 50 km for stacks emitting inside the mixing layer (see Figure 5.5). For high stacks emitting above the mixing layer and in stable situations, this distance can be much larger.

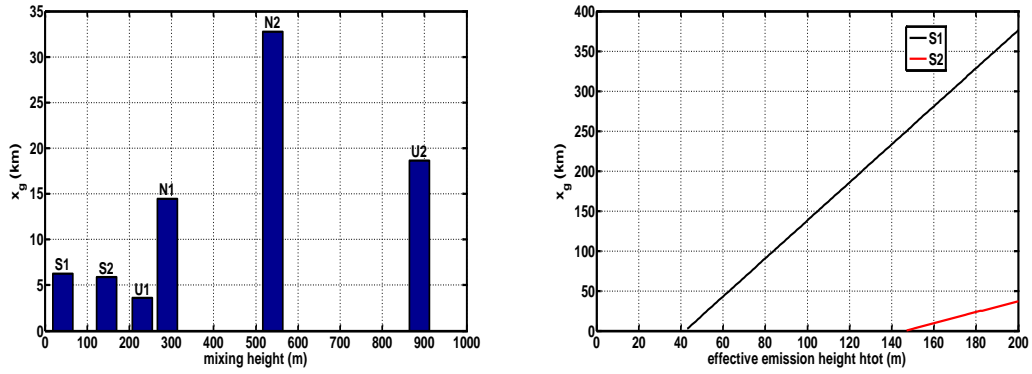


Figure 5.5 Distance  $x_g$  (m), where the plume is fully mixed, for different stability classes in OPS; mixing height from Table 2.5. Left panel: for a low stack (height 10 m) emitting inside the mixing layer; x-axis = average mixing height of the meteo class (m). Right panel: for a high stack emitting above the mixing layer, stability classes S1 and S2 (stable classes with mixing heights of 42 and 146 m resp.); x-axis = effective emission height. Here we assumed that the mixing height at 100 km is 2 times the local mixing height.

$D_z(x, h)$  can now be written as:

$$D_z(x) = \frac{1}{z_{i, \max}} \quad (5.26)$$

and the depleted source strength is

$$\tilde{Q}(x) = Q_0 \exp\left(-v_d(z) \frac{x - x_g}{\bar{u} z_{i, \max}}\right), \quad (5.27)$$

where  $\bar{u}$  is the transport velocity taken at  $z = z_{i, \max}/2$ .

As is pointed out earlier in section 1.3.3, the mixing height  $z_{i, \max}$  is a function of the transport distance  $x$ . Transport times can be of the order of days, where several diurnal cycles in mixing height and aerodynamic resistances can occur. To compensate for these effects on the source depletion ratio,  $v_d(z)$  is corrected with a factor  $f_d(x, h)$  (see Eq. (2.25), which is determined in the meteorological pre-processor.

For the three phases of the plume, various transport velocities are applied, depending on the height of the centre of the plume mass. Also the height for which  $v_d$  is specified depends on the phase of the plume. In principle,  $v_d$  has to be specified for the lowest height where the vertical concentration distribution is not yet disturbed by the dry deposition process. In phase I (inside area source),  $v_d$  is taken at  $z = 4$  m. For phase II (Gaussian plume, no gradient due to deposition),  $v_d$  is taken at  $z = 0$  m, while for phase III (well-mixed)  $v_d$  is taken at  $z = 50$  m. The vertical profile correction (Eq. 5.12) is started at the beginning of phase II, but has most of its effects in phase III.

The source depletion ratio at a (large) distance from an area source, due to dry deposition, is calculated as the product of the depletion ratios in the different stages of plume development.

### 5.3 Source depletion for heavy plumes

In appendix 0, (Onderdelinden, 1985) derives the following expressions for the source depletion ratio's of heavy plumes:

$$\frac{\tilde{Q}(x)}{Q} \approx \frac{1}{\sqrt{\pi}} \exp\left(-p_1^2\right) \left\{ \frac{1}{p_1 + \sqrt{p_1^2 + \frac{4}{\pi}}} + \frac{1}{p_2 + \sqrt{p_2^2 + \frac{4}{\pi}}} \right\}, \quad \delta \geq h \quad (5.28)$$

$$\frac{\tilde{Q}(x)}{Q} \approx 1 - \frac{1}{\sqrt{\pi}} \exp\left(-p_1^2\right) \left\{ \frac{1}{-p_1 + \sqrt{p_1^2 + \frac{4}{\pi}}} - \frac{1}{p_2 + \sqrt{p_2^2 + \frac{4}{\pi}}} \right\}, \quad \delta < h, \quad (5.29)$$

with

$p_1 = \frac{-h + \delta}{\sqrt{2}\sigma_z}$ ,  $p_2 = \frac{h + \delta}{\sqrt{2}\sigma_z}$ ,  $Q$  source strength [g/s],  $\tilde{Q}$  depleted source strength [g/s],  $\sigma_z$  vertical

dispersion length [m],  $h$  emission height [m],  $\delta$  plume descent [m]:

$$\delta = v_s \frac{x}{u}, \quad (5.30)$$

where  $v_s$ : settling velocity of heavy particles [m/s],  $x$ : down-wind distance from source [m],  $u$ : wind speed [m/s].

Onderdelinden (1985) showed that the deposition velocity for heavy plumes is half the settling velocity (see also appendix 0).

## 5.4 Dry deposition of non-acidifying substances

Dry deposition is simulated in the OPS model by means of the so-called resistance model. Three resistances ([s/m]) in series determine the deposition velocity here:

- the aerodynamic resistance  $R_a$
- the laminar boundary layer resistance  $R_b$
- the surface resistance  $R_c$ .

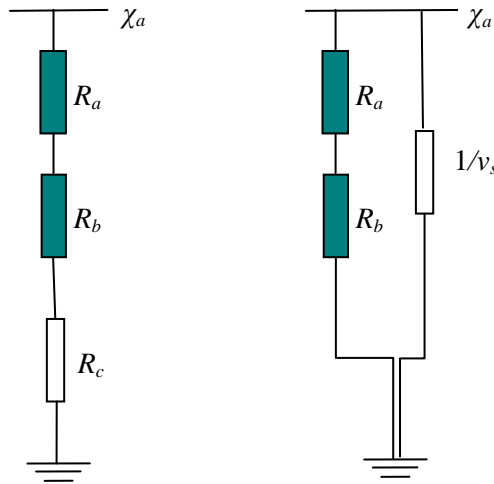


Figure 5.6 Standard resistance approach used in OPS (left panel) and resistance approach for heavy particles (right panel), where there is a separate path with a settling (sedimentation) velocity  $v_s$ .

The deposition (or exchange) velocity [m/s] is given by:

$$v_d = (R_a + R_b + R_c)^{-1} \quad (5.31)$$

where  $R_a$  and  $R_b$  are calculated when the meteorological statistics for a certain period/area are made, and as such form part of these statistics;  $R_c$  has to be specified by the user for the substance he/she wishes to calculate as an average over the period to be considered. As an alternative, an average deposition velocity  $v_d$ , may be input, whereby the model calculates  $R_c$  using average values of  $R_a$  and  $R_b$ . In this way, the specific  $R_a$  and  $R_b$  for a particular stability class can still be used. The average  $v_d$ , which can be entered in the above manner, has an upper limit, because  $R_c \geq 0$  s/m, which means that the upper limit of  $v_d$  is in the order of 0.035 m/s.

Dry deposition of particulate substances is entirely related to the dimensions of the particles. The deposition velocities for the particle-size classes have been determined using data from Slinn (1982). Here, the logarithmic class mean has consistently been seen as representative of all particle diameters in a class. In the class with the largest particles ( $> 20 \mu\text{m}$ ),  $40 \mu\text{m}$  was taken as representative value. If sedimentation plays a role, we use a different resistance approach, shown in the right panel of Figure 5.6, with a sedimentation velocity  $v_s$  [m/s], which is computed using Stokes law:

$$v_s = \frac{(\rho_p - \rho_{air}) D_p^2 g}{18\mu}, \quad (5.32)$$

with



$v_s$  : sedimentation or terminal settling velocity [m/s]  
 $\rho_p$  : density of particle  $\sim 1000 \text{ kg/m}^3$   
 $\rho_{air}$  : density of air =  $1.293 \text{ kg/m}^3$  (0 °C),  $1.205 \text{ kg/m}^3$  (20 °C)  
 $D_p$  : diameter of particle [m]  
 $g$  : acceleration of gravity =  $9.807 \text{ m/s}^2$   
 $\mu$  : viscosity of air =  $1.81 \cdot 10^{-5} \text{ kg/(s m)}$ .

The effective deposition velocity is only influenced by the distribution of the substance over the particle-size classes. The deposition velocities concerned (weighted over the various stability/mixing height classes) are given in Table 5.2.

**Table 5.2 Dry deposition parameters for 6 particle classes. (2): D = mass median diameter. (3) Rc: canopy resistance. (4): deposition velocity according to Sehmel & Hodgson (1980). (5) sedimentation velocity. (6)-(8) standard particle-size distributions. The canopy resistance Rc has been derived from  $1/v_d(\text{Slinn}) - R_a - R_b$ , with  $R_a$  and  $R_b$  aerodynamic and boundary layer resistances, weighed over all stability/mixing height classes ( $R_a$  at 4 m height; grass,  $z_0 = 0.15 \text{ m}$ ).**

	class		1	2	3	4	5	6
1.	size range	$\mu\text{m}$	<0.95	0.95-2.5	2.5-4	4-10	10-20	>20
2.	D	$\mu\text{m}$	0.2	1.6	3	6	14	40
3.	$R_c$	s/m	3200	700	150	50	2	-17 <sup>(1)</sup>
4.	$v_d$	cm/s	0.03	0.13	0.46	0.9	2.4	5.4
5.	$v_s$	cm/s	0.00	0.01	0.03	0.11	0.59	4.8
6.	fine	%	70	12	8	5.5	2.5	2
7.	medium	%	53	16	12	11.5	4.2	3.3
8.	coarse	%	42	19	14	14.5	5.9	4.6


(1) not used; for class 6, the resistance scheme according to Figure 5.6, right panel is used.

## 5.5 Dry deposition of acidifying and eutrophying substances, DEPAC

### 5.5.1 Dry deposition of gaseous substances

In the case of the gases  $\text{SO}_2$ ,  $\text{NO}$ ,  $\text{NO}_2$ ,  $\text{HNO}_3$  and  $\text{NH}_3$ , the OPS model uses the deposition module DEPAC (DEPosition of Acidifying Compounds) for the parameterisation of the canopy resistance  $R_c$  (van Zanten et al. 2010). This module was developed by Erisman *et al.* (1994) on the basis of experimental data such as those derived from the Speulder forest experiments and it uses a resistance analogy in order to model the deposition fluxes (see Figure 5.7). For gases emitted by sources at the surface level, such as  $\text{NH}_3$ , the resistance analogy can only be used if a non-zero surface concentration is taken into account. Such a concentration is sometimes referred to as the compensation point.

The compensation point concentration may vary strongly with vegetation type and soil properties, and preceding deposition/emission fluxes. In Wichink Kruit et al. 2010, parameterisations of the different compensation points have been proposed and these have been implemented in the deposition module DEPAC.

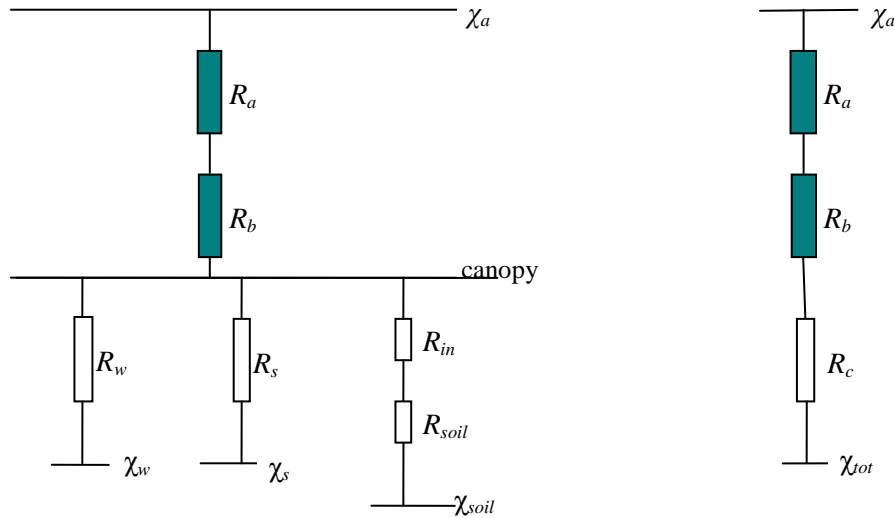

**Figure 5.7** *Flux/resistance model for dry deposition in the DEPAC module, with atmospheric concentration  $\chi_a$ , resistances  $R$  and compensation points  $\chi$ . Three pathways are taken into account: through the stomata (subscript  $s$ ), the external leaf surface (water layer or cuticular waxes, subscript  $w$ ) and the soil (subscript  $soil$ ).  $R_{inc}$  is the in canopy resistance. Left panel: scheme with separate resistances and compensation points. Right panel: equivalent scheme with a replacement resistance  $R_c$  and total compensation point  $\chi_{tot}$  as defined in text.*

Only for  $\text{NH}_3$  the full scheme is used; for other components, we assume the compensation points to be zero. If no information is available on the different deposition pathways, we use one replacement resistance  $R_c$ .

In this deposition model,  $R_{stom}$  represents the stomatal resistance of leaves.  $R_{inc}$  and  $R_{soil}$  are resistances representing in-canopy vertical transport to the soil that bypasses leaves and branches.  $R_w$  is an external resistance that represents transport via leaf and stem surfaces, especially when these surfaces are wet. The canopy resistance  $R_c$  and the effective compensation point  $\chi_{tot}$  are calculated as:

$$R_c = \left( \frac{1}{R_w} + \frac{1}{R_{inc} + R_{soil}} + \frac{1}{R_s} \right)^{-1}, \quad (5.33)$$

$$\chi_{tot} = \left[ \frac{R_c}{R_w} \chi_w + \frac{R_c}{R_{inc} + R_{soil}} \chi_{soil} + \frac{R_c}{R_s} \chi_s \right]. \quad (5.34)$$

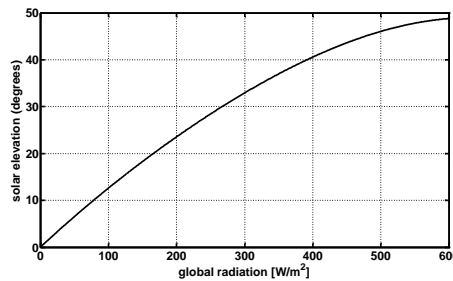
The DEPAC module contains values or formulae for each of the resistances below the canopy and for various land-use types. The module includes the following gaseous components:  $\text{SO}_2$ ,  $\text{NO}$ ,  $\text{NO}_2$ ,  $\text{NH}_3$  and  $\text{O}_3$  and provides a canopy resistance on an hourly basis as a function of meteorological parameters, day of the year and time of the day. The day of year is used in the parameterisation of the leaf area index and the surface water compensation point. In OPS-LT, DEPAC is called for day 15 in a 'representative month', which has been tested to represent the average over 12 separate month-runs.  $\text{NH}_3$  deposition on land use class 'arable land' varies so much that two representative months are needed (see Table 5.3) of which the resulting resistances are averaged to calculate the yearly deposition. Because there is no reason to assume that the underlying mechanism does not hold for  $\text{SO}_2$  and  $\text{NO}_x$ , the same months are used for these components.

Table 5.3 Representative month(s) for which DEPAC is called, for different run-types, land use and species.

type of run	land use	species	representative month(s)
year	arable land	SO <sub>2</sub> , NO <sub>x</sub> , NH <sub>3</sub>	April, July
year	other than arable	SO <sub>2</sub> , NO <sub>x</sub> , NH <sub>3</sub>	May
winter	all	SO <sub>2</sub> , NO <sub>x</sub> , NH <sub>3</sub>	November
summer	all	SO <sub>2</sub> , NO <sub>x</sub> , NH <sub>3</sub>	June
month	all	SO <sub>2</sub> , NO <sub>x</sub> , NH <sub>3</sub>	actual month

Meteorological parameters needed as input are: temperature, friction velocity, global radiation, solar elevation, relative humidity and a surface wetness indicator. In OPS-LT, stability/mixing height class averaged values are used. The solar elevation is derived from a fit on hourly data of global radiation  $Q$  [W/m<sup>2</sup>] in The Netherlands, where cloudy hours are filtered out:

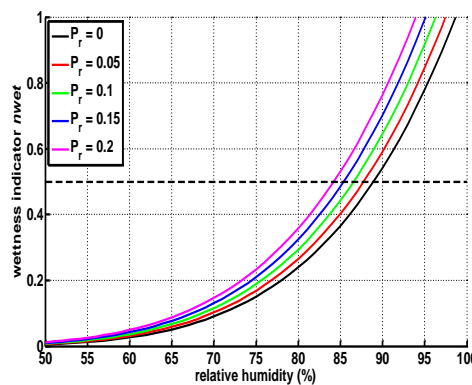
$$\sin(\varphi) = 2.37 \cdot 10^3 Q - 1.86 \cdot 10^6 Q^2. \quad (5.35)$$

Figure 5.8 Solar elevation (degrees) as function of global radiation [W/m<sup>2</sup>].

The surface wetness indicator is needed, because dry deposition velocities of SO<sub>2</sub> and NH<sub>3</sub> are much higher when the surface is wet. Due to the nature of the OPS-LT model, it is not straightforward to decide if a certain meteo class is to be labelled ‘wet’ or ‘dry’. The following empirical relation connects the average relative humidity  $RH$  (in %) and precipitation probability  $P_r$  to the wetness indicator:

$$nwet = \frac{(0.4 P_r + 0.017 RH - 0.4)^5}{3.33}. \quad (5.36)$$

The surface is assumed ‘wet’ if  $nwet > 0.5$ , otherwise it is dry. Expression (5.36) is derived from surface wetness observations in the Speulder forest. The switch point of (5.36) for zero  $P_r$ , lies around  $RH = 87$  %. This means that the surface is supposed to be wet in approx. 50% of the time.

Figure 5.9 Wetness indicator  $nwet$  as function of relative humidity  $RH$  for different values of precipitation probability  $P_r$ . In the source code,  $nwet$  is rounded to 0 (dry) or 1 (wet).

Other parameters are land-use class and an indicator for the  $\text{NH}_3/\text{SO}_2$  ratio. The latter is always set to 'high', because of the relatively high  $\text{NH}_3$  concentrations in the Netherlands.

Two extra input parameters are needed for the  $\text{NH}_3$  compensation point: (1) atmospheric concentration averaged over a previous period (e.g. previous year or month) and (2) actual atmospheric concentration. Since actual concentrations are not available in OPS-LT, both (1) and (2) are represented by the  $\text{NH}_3$  background concentration. This implies that it is possible that emissions take place via the external leaf pathway, whereas for hour-by-hour calculations (using actual concentrations in the parameterisation of the external compensation point), there is no emission via the external leaf path (deposition is only reduced).

Output of the DEPAC module is the canopy resistance  $R_c$  and the total compensation point  $\chi_{tot}$ . In general, after the call to DEPAC, the (hourly) deposition flux  $F$  can be computed as:

$$F = -v_d \cdot (\chi_a - \chi_{tot}), \quad (5.37)$$

with deposition (exchange) velocity

$$v_d = \frac{1}{R_a + R_b + R_c}. \quad (5.38)$$

For OPS-LT however, an alternative expression has been chosen:

$$F = -v_d' \cdot \chi_a, \quad (5.39)$$

$$v_d' = \frac{1}{R_a + R_b + R_c'} = v_d \left( \frac{\chi_a - \chi_{tot}}{\chi_a} \right), \quad (5.40)$$

with  $R_c'$  the effective canopy resistance, which is also an output of the DEPAC module:

$$R_c' = \left( \frac{(R_a + R_b)\chi_{tot} + R_c\chi_a}{(\chi_a - \chi_{tot})} \right). \quad (5.41)$$

In the rare case that  $R_c'$  is negative (re-emission over the whole of the stability/mixing height class), OPS-LT resets  $R_c'$  to a large value of 1000 s/m.

Up to OPS version 4.3.16, the DEPAC routine is called with as argument the **dominant** land use of the grid cell for which the local deposition has to be calculated. This can give rise to inconsistencies between the aerodynamic resistance  $R_a$  and the canopy resistance  $R_c$  in case of grid cells with varying land use, because the former is based on the grid **averaged** roughness value  $z_0$ . From OPS-version 4.5.2 on, DEPAC is called for each of the land use classes occurring over a trajectory or in the receptor grid cell, upon which the average dry deposition velocity  $v_d$  is calculated from the resulting  $R_c$  values as follows:

$$\overline{v_d} = \sum_i f_i \frac{1}{R_a + R_b + R_{c,i}}. \quad (5.42)$$

with  $R_{c,i}$  the (effective)  $R_c$  value of land use class  $i$  and  $f_i$  the fraction of occurrence of class  $i$  in the concerned grid cell.

Further details on DEPAC, such as the parameterisation of different resistances and compensation points, are given in Van Zanten et al. 2010 (available as separate PDF-document *depac\_yyyymmdd.pdf*).

### 5.5.2 Dry deposition of NO<sub>x</sub>

In this model NO<sub>x</sub> represents the sum of NO, NO<sub>2</sub>, PAN and HNO<sub>2</sub>. The DEPAC module provides estimates of the canopy resistances of NO and NO<sub>2</sub>; for HNO<sub>2</sub>, dry deposition velocities similar to those of SO<sub>2</sub> have been suggested by Wesely (1989). Erisman (1992) estimated the average dry deposition of HNO<sub>2</sub> in the Netherlands at less than 6 % of the total dry deposition of all oxidised nitrogen components. Dry deposition properties for PAN are assumed to be the same as for NO<sub>2</sub>. The canopy resistance for NO<sub>x</sub> is now calculated as:

$$R_c(\text{NO}_x) = \frac{1}{a} - R_a - R_b \quad (5.43)$$

with

$$a = \frac{r_{n,eff}}{R_c(\text{NO}_2) + R_a + R_b} + \frac{1 - r_{n,eff}}{R_c(\text{NO}) + R_a + R_b} + \frac{f_{\text{HNO}_2}}{R_c(\text{HNO}_2) + R_a + R_b}, \quad (5.44)$$

where  $r_{n,eff}$  is the NO<sub>2</sub>/NO<sub>x</sub> ratio and  $f_{\text{HNO}_2}$  is the fraction of HNO<sub>2</sub> in NO<sub>x</sub> taken at a fixed value of 0.04.  $R_a$  is calculated for a height of 4 m. The atmospheric resistances  $R_a$  and  $R_b$  are included in this calculation only as weighting factors because the calculation of a species weighted  $R_c$  has to be carried out on the basis of deposition velocities and not on resistances.

### 5.5.3 Dry deposition of acidifying aerosols

The route to forming particles containing SO<sub>4</sub><sup>2-</sup>, NO<sub>3</sub><sup>-</sup> and NH<sub>4</sub><sup>+</sup> runs through direct gas-to-particle conversion and evaporation of cloud droplets in which conversion has previously taken place. Newly formed particles are usually smaller than 0.01 μm (Aitken particles). If the gas condenses on existing particles (e.g. heterogeneous processes), the median size of these particles will also be relatively small, because small particles have the highest specific surface area. Through processes such as coagulation, small particles will grow and finally be concentrated in a 0.1– 1 μm range, the so-called accumulation mode. Most theoretical models suggest a deposition velocity  $v_d$  between 0.05 - 0.2 cm/s for this size range and relatively smooth surfaces ( $z_0 < 0.1$  m). Data from the literature suggest that for rough surfaces such as forests, the dry deposition velocity will be significantly higher, for example, in the order of 1 cm/s (Voldner *et al.*, 1986; Erisman *et al.*, 1994).

A different approach has been followed for acidifying aerosols such as SO<sub>4</sub><sup>2-</sup>, NO<sub>3</sub><sup>-</sup> and NH<sub>4</sub><sup>+</sup> than for aerosols or particles in general. One reason is that there is more experimental data available which makes it possible to distinguish between vegetation types; another reason is that particle-sizes are usually small since the particles have been formed in the atmosphere and are thus independent of industrial processes or cleaning equipment.

Basically, the dry deposition of particles is modelled using empirical relations. These relations describe the vertical movement of small particles at or within the canopy. The empirical relations can be fitted into a common resistance approach according to Figure 5.10.

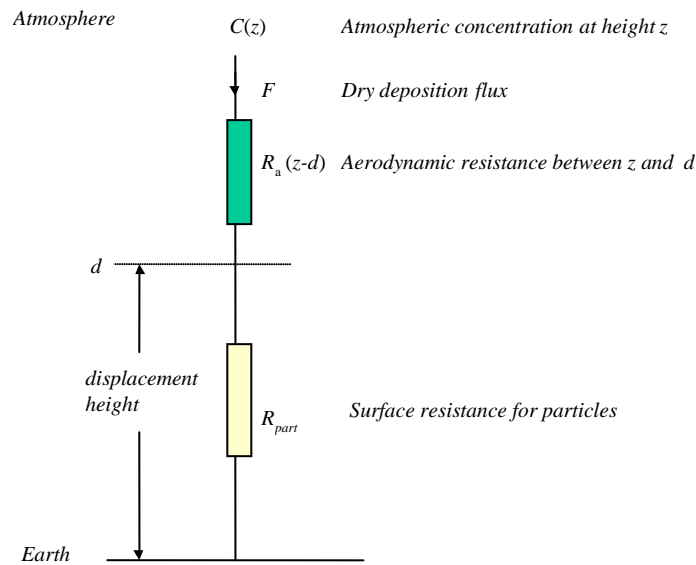


Figure 5.10 Resistance model for acidifying aerosols.

In this model the effects of all canopy-related processes are included in  $R_{part}$ . Together with the aerodynamic resistance it can be included in a dispersion model just as the resistance model for gases. The dry deposition velocity for small particles is then calculated as:

$$v_{d\_part} = \frac{1}{R_a(z-d) + R_{part}}, \quad (5.45)$$

with  $d$  the displacement height [m]. In OPS, the displacement height is neglected ( $d = 0$  m).

For roughness lengths below 0.5 m, the particle ‘canopy’ resistance is modelled according to Wesely *et al.* (1985):

$$R_{part}^{-1} = \frac{u^*}{500} \left( 1 + \left( \frac{300}{-L} \right)^{\frac{2}{3}} \right) \quad \text{if } L < 0 \quad (5.46)$$

$$R_{part}^{-1} = \frac{u^*}{500} \quad \text{if } L > 0, \quad (5.47)$$

with friction velocity  $u^*$  [m/s] and Monin-Obukhov length  $L$  [m].

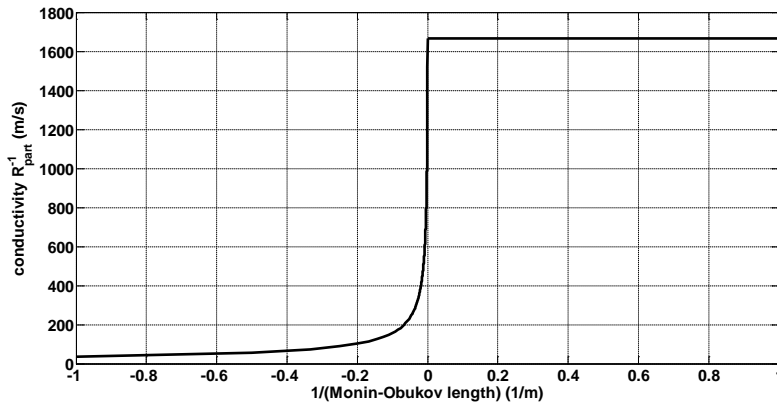


Figure 5.11 Conductivity  $1/R_{part}$  for particles as function of  $1/(\text{Monin-Obukhov length})$ ; roughness length  $< 0.5$  m.

For forested areas and areas with roughness lengths above 0.5 m,  $R_{part}$  is parameterised according to Ruijgrok *et al.* (1993):

$$R_{part}^{-1} = \frac{E (u^*)^2}{u_h}, \quad (5.48)$$

where  $u_h$  represents the wind speed at canopy height ( $\text{m s}^{-1}$ ) and  $E$  a particle collection efficiency:

$$E = a (u^*)^b, \text{ for } RH \leq 80 \% \quad (5.49)$$

$$E = a (u^*)^b \left( 1 + c \exp\left(\frac{RH-80}{20}\right) \right), \text{ for } RH > 80 \%, \quad (5.50)$$

with  $RH$  the relative humidity [%] and  $a$ ,  $b$ ,  $c$  coefficients defined in Table 5.4.

Table 5.4 Coefficients of the collection efficiency parameterisation.

	$a$		$b$		$c$	
	Dry	Wet	Dry	Wet	Dry	Wet
SO <sub>4</sub>	0.05	0.08	0.28	0.45	0.18	0.37
NO <sub>3</sub>	0.063	0.10	0.25	0.43	0.18	0.37
NH <sub>4</sub>	0.05	0.066	0.23	0.41	0.18	0.37

### 5.5.4 Dry deposition of NO<sub>3</sub><sup>-</sup> + HNO<sub>3</sub>

The model describes the transport of only one secondary substance. In the case of nitrogen oxides the secondary substance consists of NO<sub>3</sub>t (= NO<sub>3</sub><sup>-</sup> + HNO<sub>3</sub>), which has very different dry deposition velocities and therefore very different atmospheric lifetimes. NO<sub>3</sub><sup>-</sup> aerosol is the dominant species under European conditions. The model uses a dry deposition velocity adjusted to  $f_{\text{HNO}_3}$ , which is an empirically determined HNO<sub>3</sub>/NO<sub>3</sub>t ratio (Eq. 7.19). Similar to the dry deposition of NO<sub>x</sub>, the canopy resistance for NO<sub>3</sub>t is determined by:

$$R_c(\text{NO}_3\text{t}) = \frac{1}{b} - R_a - R_b, \quad (5.51)$$

with

$$b = \frac{f_{\text{HNO}_3}}{R_c(\text{HNO}_3) + R_a + R_b} + \frac{1 - f_{\text{HNO}_3}}{R_c(\text{NO}_3) + R_a + R_b}, \quad (5.52)$$

where  $R_c(\text{NO}_3)$  is computed as  $R_{\text{part}}$  above.  $R_c(\text{HNO}_3)$  is taken as 10 s/m under all conditions.

## 5.6 Appendix

### 5.6.1 Derivation of the source depletion ratio for phase II of a plume

We start from the expression for the depleted source strength (Eq. 5.19) and for the dispersion factor  $D_z(x)$  for phase II of the plume (Eq. 5.23):

$$\tilde{Q}(x) = Q_0 \exp \left[ - \int_0^x \frac{v_d(z)}{\bar{u}} D_z(\xi) d\xi \right] = Q_0 \exp \left[ - \int_0^x \frac{v_d(z)}{\bar{u}} \frac{2}{\sqrt{2\pi} \sigma_z} \exp \left[ \frac{-h^2}{2\sigma_z^2} \right] d\xi \right].$$

According to Eq. 3.24,  $\sigma_z^2 = 2K_z t = 2K_z \frac{\xi}{u}$ , with travel time [s]  $t = \xi/u$  and turbulent eddy diffusivity

$K_z$  [ $\text{m}^2/\text{s}$ ], that does not depend on the distance  $\xi$ .

Substitution of  $\sigma$  as function of  $\xi$  in the integral (for convenience we drop the subscript  $z$ ):

$$\sigma^2 = \frac{2K_z \xi}{u} \Rightarrow 2\sigma d\sigma = \frac{2K_z}{u} d\xi$$

$$\tilde{Q}(x) = Q_0 \exp \left[ - \frac{u}{K_z} \int_0^{\sigma(x)} \frac{v_d(z)}{\bar{u}} \frac{2}{\sqrt{2\pi}} \exp \left[ \frac{-h^2}{2\sigma^2} \right] d\sigma \right]$$

Define:

$$I = \int_0^{\sigma(x)} \exp \left[ \frac{-h^2}{2\sigma^2} \right] d\sigma$$

and substitute

$$y = \frac{h}{\sqrt{2}\sigma}, dy = \frac{-h}{\sqrt{2}\sigma^2} d\sigma = \frac{-\sqrt{2}}{h} y^2 d\sigma:$$

$$I = \frac{h}{\sqrt{2}} \int_{\frac{h}{\sqrt{2}\sigma}}^{\infty} \frac{\exp[-y^2]}{y^2} dy.$$

Integration by parts and using the abbreviation  $p = \frac{h}{\sqrt{2}\sigma}$  leads to

$$\begin{aligned} I &= \frac{h}{\sqrt{2}} \int_p^{\infty} \exp(-y^2) \cdot \left( \frac{1}{y^2} \right) dy = \frac{h}{\sqrt{2}} \left[ \exp(-y^2) \left( \frac{-1}{y} \right) \right]_p^{\infty} - \int_p^{\infty} (-2y) \exp(-y^2) \left( \frac{-1}{y} \right) dy = \\ &= \frac{h}{\sqrt{2}} \left\{ \frac{\exp(-p^2)}{p} - 2 \int_p^{\infty} \exp(-y^2) dy \right\}. \end{aligned}$$

The integral term, can be approximated as follows:



$$\int_p^\infty \exp(-y^2) dy = \frac{1}{2} \sqrt{\pi} \operatorname{erfc}(p) \approx \frac{\exp(-p^2)}{p + \sqrt{p^2 + \frac{4}{\pi}}}, \text{ for } p > 0.$$

(Abramowitz & Stegun (1970), 7.1.13).

$$\begin{aligned} I &= \frac{h}{\sqrt{2}} \left\{ \frac{1}{p} \exp(-p^2) - \frac{2 \exp(-p^2)}{p + \sqrt{p^2 + \frac{4}{\pi}}} \right\} = \frac{h}{\sqrt{2}} \exp(-p^2) \left\{ \frac{1}{p} - \frac{2}{p + \sqrt{p^2 + \frac{4}{\pi}}} \right\} = \\ &= \frac{h}{\sqrt{2}} \exp(-p^2) \left\{ \frac{\left( p + \sqrt{p^2 + \frac{4}{\pi}} \right) - 2p}{p \left( p + \sqrt{p^2 + \frac{4}{\pi}} \right)} \right\} = \frac{h}{\sqrt{2}} \exp(-p^2) \left\{ \frac{\sqrt{p^2 + \frac{4}{\pi}} - p}{p \left( p + \sqrt{p^2 + \frac{4}{\pi}} \right)} \right\} = \\ &= \frac{h}{\sqrt{2}} \exp(-p^2) \left\{ \frac{\left( \sqrt{p^2 + \frac{4}{\pi}} - p \right) \left( p + \sqrt{p^2 + \frac{4}{\pi}} \right)}{p \left( p + \sqrt{p^2 + \frac{4}{\pi}} \right)^2} \right\} = \frac{h}{\sqrt{2}} \exp(-p^2) \left\{ \frac{p^2 + \frac{4}{\pi} - p^2}{p \left( p + \sqrt{p^2 + \frac{4}{\pi}} \right)^2} \right\} = \\ &= \frac{h}{\sqrt{2}} \frac{\exp(-p^2)}{p} \left\{ \frac{\frac{4}{\pi}}{\left( p + \sqrt{p^2 + \frac{4}{\pi}} \right)^2} \right\} = \frac{h}{\sqrt{2}} \frac{\beta \exp(-p^2)}{p}, \text{ with} \\ \beta &= \frac{\frac{4}{\pi}}{\left( p + \sqrt{p^2 + \frac{4}{\pi}} \right)^2} = \frac{\frac{4}{\pi} \frac{1}{p^2}}{\left( 1 + \sqrt{1 + \frac{4}{\pi} \frac{1}{p^2}} \right)^2} = \frac{8\sigma^2}{\pi h^2 \left( 1 + \sqrt{1 + \frac{8\sigma^2}{\pi h^2}} \right)^2}. \end{aligned}$$

The depleted source strength can be written as:

$$\tilde{Q}(x) = Q_0 \exp \left[ -\frac{u}{K_z} \frac{v_d(z)}{\bar{u}} \frac{2}{\sqrt{2\pi}} I \right] = Q_0 \exp \left[ -\frac{u}{K_z} \frac{v_d(z)}{\bar{u}} \frac{2}{\sqrt{2\pi}} \frac{h}{\sqrt{2}} \frac{\beta \exp(-p^2)}{p} \right].$$

Substitute  $K_z = \frac{1}{2} \frac{u}{x} \sigma^2$  and  $p = \frac{h}{\sqrt{2} \sigma}$ :

$$\begin{aligned} \tilde{Q}(x) &= Q_0 \exp \left[ -\frac{2x}{\sigma^2} \frac{v_d(z)}{\bar{u}} \frac{2}{\sqrt{2\pi}} \frac{h}{\sqrt{2}} \frac{\sqrt{2}\sigma}{h} \beta \exp \left( -\frac{h^2}{2\sigma^2} \right) \right] = \\ &= Q_0 \exp \left[ -\frac{4x}{\sqrt{2\pi} \sigma} \frac{v_d(z)}{\bar{u}} \beta \exp \left( -\frac{h^2}{2\sigma^2} \right) \right]. \end{aligned}$$

The source depletion ratio is:

$$\begin{aligned}\frac{\tilde{Q}(x)}{Q(x_s)} &= \exp \left\{ -v_d(z) \frac{x-x_s}{\bar{u}} \frac{4\beta}{\sqrt{2\pi} \sigma_z} \exp \left[ \frac{-h^2}{2\sigma_z^2} \right] \right\} \\ &= \exp \left\{ -v_d(z) \frac{x-x_s}{\bar{u}} 2\beta D_z(x) \right\},\end{aligned}$$

Substituting Eq. (3.7):

$$D_z(x) = \frac{C(x) u(x)}{Q_0 D_y(x)} = \frac{C(x) u(x)}{Q_0} \frac{2\pi x}{m_s},$$

we get:

$$\frac{\tilde{Q}(x)}{Q(x_s)} = \exp \left\{ -\frac{2\beta v_d(z) (x-x_s)}{\bar{u}} \frac{x C(x) u(x)}{Q_0} \frac{2\pi}{m_s} \right\}.$$

in which  $\bar{u}$  is the average transport speed (averaged over the trajectory) and  $u(x)$  the wind speed at the location of the receptor and at transport height.

The advantage of the latter expression is that we now have an expression in  $C(x)$  instead of  $\sigma_z$ . The error introduced by neglecting mixing height reflections will be greatly reduced in this way.

### 5.6.2 Derivation of the source depletion ratio for a heavy plume

The cross-wind integrated concentration ( $\mu\text{g}/\text{m}^2$ ) in a heavy plume is described (Onderdelinden, 1985) by a direct source term and an indirect source, reflecting from the earth surface:

$$C(x, z) = \frac{Q}{\sqrt{2\pi} u \sigma_z} \left( \exp \left[ \frac{-(z-h+\delta)^2}{2\sigma_z^2} \right] + \exp \left[ \frac{-(z+h+\delta)^2}{2\sigma_z^2} + \frac{4h\delta}{2\sigma_z^2} \right] \right),$$

with  $\delta$  the plume descent (m):

$$\delta = v_s \frac{x}{u},$$

where  $v_s$ : settling velocity of heavy particles (m/s),  $x$ : down-wind distance from source (m),  $u$ : wind speed (m/s).

The integrated mass per unit length  $M_\ell(x)$  [g/m] in the plume is

$$\begin{aligned}M_\ell(x) &= \int_0^\infty C(x, z) dz = \\ &= \frac{Q}{\sqrt{2\pi} u \sigma_z} \int_0^\infty \left( \exp \left[ \frac{-(z-h+\delta)^2}{2\sigma_z^2} \right] + \exp \left[ \frac{-(z+h+\delta)^2}{2\sigma_z^2} + \frac{4h\delta}{2\sigma_z^2} \right] \right) dz.\end{aligned}$$

Substituting  $y = \frac{(z-h+\delta)}{\sqrt{2}\sigma_z}$  in the first and  $y = \frac{(z+h+\delta)}{\sqrt{2}\sigma_z}$  in the second term, we get

$$M_{\ell}(x) = \frac{Q}{\sqrt{\pi} u} \left\{ \int_{p_1}^{\infty} \exp(-y^2) dy + \exp\left(\frac{4h\delta}{2\sigma_z^2}\right) \cdot \int_{p_2}^{\infty} \exp(-y^2) dy \right\},$$

$$\text{with } p_1 = \frac{-h+\delta}{\sqrt{2}\sigma_z}, \quad p_2 = \frac{h+\delta}{\sqrt{2}\sigma_z}.$$

These integrals can be expressed in terms of complementary error functions and are approximated as follows:

$$\int_p^{\infty} \exp(-y^2) dy = \frac{1}{2} \sqrt{\pi} \operatorname{erfc}(p) \approx \frac{\exp(-p^2)}{p + \sqrt{p^2 + \frac{4}{\pi}}}, \text{ for } p > 0$$

$$\int_p^{\infty} \exp(-y^2) dy = \int_{-\infty}^{\infty} \exp(-y^2) dy - \int_{-\infty}^p \exp(-y^2) dy \approx \sqrt{\pi} - \frac{\exp(-p^2)}{-p + \sqrt{p^2 + \frac{4}{\pi}}}, \text{ for } p < 0.$$

(Abramowitz & Stegun (1970), 7.1.13).

Note that

$$\exp\left(\frac{4h\delta}{2\sigma_z^2}\right) \cdot \exp(-p_2^2) = \exp\left(\frac{4h\delta}{2\sigma_z^2} - \frac{(h+\delta)^2}{2\sigma_z^2}\right) = \exp\left(-\frac{(-h+\delta)^2}{2\sigma_z^2}\right) = \exp(-p_1^2).$$

$$M_{\ell}(x) \approx \frac{Q}{\sqrt{\pi} u} \left\{ \frac{\exp(-p_1^2)}{p_1 + \sqrt{p_1^2 + \frac{4}{\pi}}} + \exp\left(\frac{4h\delta}{2\sigma_z^2}\right) \cdot \frac{\exp(-p_2^2)}{p_2 + \sqrt{p_2^2 + \frac{4}{\pi}}} \right\} =$$

$$= \frac{Q}{\sqrt{\pi} u} \left\{ \frac{\exp(-p_1^2)}{p_1 + \sqrt{p_1^2 + \frac{4}{\pi}}} + \frac{\exp(-p_1^2)}{p_2 + \sqrt{p_2^2 + \frac{4}{\pi}}} \right\}, \quad p_1 \geq 0$$

$$M_{\ell}(x) \approx \frac{Q}{\sqrt{\pi} u} \left\{ \sqrt{\pi} - \frac{\exp(-p_1^2)}{-p_1 + \sqrt{p_1^2 + \frac{4}{\pi}}} + \frac{\exp(-p_1^2)}{p_2 + \sqrt{p_2^2 + \frac{4}{\pi}}} \right\}, \quad p_1 < 0.$$

We approximate the depleted source strength  $\tilde{Q}$  (g/s) as follows:

$$\tilde{Q} = \frac{1}{t} \int_0^x M_{\ell}(\xi) d\xi \approx \frac{x}{t} M_{\ell}(x) = u M_{\ell}(x).$$

The source depletion ratio's are:

$$\frac{\tilde{Q}(x)}{Q} \approx \frac{1}{\sqrt{\pi}} \exp(-p_1^2) \left\{ \frac{1}{p_1 + \sqrt{p_1^2 + \frac{4}{\pi}}} + \frac{1}{p_2 + \sqrt{p_2^2 + \frac{4}{\pi}}} \right\}, \quad \delta \geq h$$

$$\frac{\tilde{Q}(x)}{Q} \approx 1 - \frac{1}{\sqrt{\pi}} \exp(-p_1^2) \left\{ \frac{1}{-p_1 + \sqrt{p_1^2 + \frac{4}{\pi}}} - \frac{1}{p_2 + \sqrt{p_2^2 + \frac{4}{\pi}}} \right\}, \quad \delta < h.$$

The concentration at the surface  $z = 0$  is

$$\begin{aligned} C(x,0) &= \frac{Q}{\sqrt{2\pi} u \sigma_z} \left( \exp \left[ \frac{-(-h+\delta)^2}{2\sigma_z^2} \right] + \exp \left[ \frac{-(h+\delta)^2 + 4h\delta}{2\sigma_z^2} \right] \right) = \\ &= \frac{2Q}{\sqrt{2\pi} u \sigma_z} \exp \left[ \frac{-(h-\delta)^2}{2\sigma_z^2} \right]. \end{aligned}$$

The flux  $F$  at the surface  $z = 0$  is

$$\begin{aligned} F(x,0) &= -K_z \left. \frac{\partial C}{\partial z} \right|_{z=0} - v_s C(x,0) = \\ &= -\frac{Q}{\sqrt{2\pi} u \sigma_z} \exp \left[ \frac{-(h-\delta)^2}{2\sigma_z^2} \right] \left\{ K_z \left( \frac{(h-\delta)}{\sigma_z^2} \right) + K_z \left( \frac{-(h+\delta)}{\sigma_z^2} \right) \right\} + \\ &\quad - v_s \frac{2Q}{\sqrt{2\pi} u \sigma_z} \exp \left[ \frac{-(h-\delta)^2}{2\sigma_z^2} \right]. \end{aligned}$$

Substituting for the eddy diffusivity  $K_z$  [m<sup>2</sup>/s]  $K_z = \frac{1}{2} \frac{u}{x} \sigma_z^2$  and plume descent  $\delta = v_s \frac{x}{u}$ , we get:

$$F(x,0) = -v_s \frac{Q}{\sqrt{2\pi} u \sigma_z} \exp \left[ \frac{-(h-\delta)^2}{2\sigma_z^2} \right] = -\frac{1}{2} v_s C(x,0).$$

In other words, the deposition velocity is half the settling velocity.

## 5.7 References

- Abramowitz, Milton; Stegun, Irene A., eds. (1970), Handbook of Mathematical Functions with Formulas, Graphs, and Mathematical Tables, New York: Dover Publications, SBN 486-61272-4, see also <http://people.math.sfu.ca/~cbm/aands/>
- Beljaars A.C.M. and Holtslag A.A.M. (1990) A software library for the calculation of surface fluxes over land and sea. *Environ. Software* **5**, 60-68.
- Brutsaert W.P. (1975) The roughness length of water vapour, sensible heat and other scalars. *J. Atmos. Sci.* **32**, 2028-2031.
- Duyzer J.H. and Fowler D. (1994) Modelling land atmosphere exchange of gaseous oxides of nitrogen in Europe. *Tellus* **46B**, 353-372.
- Erismann J.W. (1992) Atmospheric deposition of acidifying compounds in the Netherlands. [PhD thesis]. Utrecht University, the Netherlands.
- Erismann J.W., Pul W.A.J. van and Wyers G.P. (1994) Parameterization of surface resistance for the quantification of atmospheric deposition of acidifying pollutants and ozone. *Atmospheric Environment* **28**, 2595-2607.
- Garratt J.R. and Hicks B.B. (1973) Momentum, heat and water vapour transfer to and from natural and artificial surfaces. *Q. J. R. Meteorol. Soc.* **99**, 680-687.

- Hazeu G.W., Schuiling C., Dorland G.J., Roerink G.J., Naeff H.S.D. & Smidt R.A. (2014) Landelijk Grondgebruiksbestand Nederland versie 7 (LGN7). Vervaardiging, nauwkeurigheid en gebruik. Rapport 2548, Alterra Wageningen UR, Wageningen.  
(<http://content.alterra.wur.nl/Webdocs/PDFFiles/Alterraraapporten/AlterraRapport2548.pdf>)
- Hicks B.B., Baldocchi D.D. Meyers T.P., Hosker Jr. R.P. and Matt D.R. (1987) A preliminary multiple resistance routine for deriving dry deposition velocities from measured quantities. *Water Air Soil Pollut.* **36**, 311-330.
- Hicks B.B., Matt D.R. and McMillen R.T. (1989) A micrometeorological investigation of surface exchange of O<sub>3</sub>, SO<sub>2</sub> and NO<sub>2</sub>: a case study. *Boundary-Layer Meteorol.* **47**, 321-336.
- Horst T. W. (1977) A surface depletion model for deposition from a Gaussian plume. *Atmospheric Environment* **11**, 41-46.
- Nieuwstadt F.T.M. (1984) Some aspects of the turbulent stable boundary layer. *Boundary-Layer Meteorol.* **30**, 31-55.
- Onderdelinden D., Jaarsveld J.A. van and Egmond N.D. van (1984) Bepaling van de depositie van zwavelverbindingen in Nederland. RIVM, Bilthoven, the Netherlands. Report no. 842017001.
- Onderdelinden (1985): Source depletion model, personal communication in OPS archive.
- Ruijgrok W., Nicholson K.W., and Davidson C.I. (1993) Dry deposition of particles. In: Lövblad G., Erisman J.W. and Fowler D., editors. Models and methods for the quantification of atmospheric input to ecosystems. Nordic Council of Ministers, Copenhagen.
- Scriven R.A. and Fisher B.E.A. (1975) The long range transport of airborne material and its removal by deposition and washout - I. General considerations. *Atmospheric Environment* **9**, 49-58.
- Sehmel G.A. and Hodgson W.H. (1980) A model for predicting dry deposition of particles and gases to environmental surfaces. AIChE Symposium Series 86, 218-230.
- Slinn W.G.N (1982) Predictions for particle deposition to vegetative surfaces. *Atmospheric Environment* **16**, 1785-1794.
- Van Dop H., Ridder T.B., Tonkelaar J.F. den and Egmond N.D. van (1980) Sulfur dioxide measurements on the 213 metre tower at Cabauw, the Netherlands. *Atmospheric Environment* **14**, 933-946.
- Van Egmond N.D. and Kesseboom H. (1983) Mesoscale air pollution dispersion models I: Eulerian Grid Model. *Atmospheric Environment* **17**, 257-265.
- Van Jaarsveld J.A., Pul W.A.J. van and Leeuw F.A.A.M. de (1994) Modelling the long range transport and deposition of persistent organic pollutants over Europe and its surrounding marine areas. In: Gryning S.E. and Millán M.M., editors. *Air pollution modelling and its application X*. Plenum Press, New York. p. 143-155.
- Van Zanten M.C., Sauter F.J., Wichink Kruit R.J., van Jaarsveld J.A., van Pul W.A.J.: Description of the DEPAC module, Dry deposition modelling with DEPAC\_GCN2010, *RIVM report 680180001*, RIVM, Bilthoven, 2010
- Verkaik, J.W. (2001): A method for the geographical interpolation of wind speed over heterogeneous terrain, KNMI report, <http://www.knmi.nl/samenw/hydra/documents/geograph/interpol.pdf>
- Voldner E.C., Barrie L.A. and Sirois A. (1986) A literature review of dry deposition of oxides of sulphur and nitrogen with emphasis on long-range transport modelling in North America. *Atmospheric Environment* **20**, 2101-2123.
- Wesely M.L. and Hicks, B.B. (1977) Some factors that effect the deposition rates of sulfur dioxide and similar gases on vegetation. *J. Air Pollut. Control Assoc.* **27**, 1110-1116.
- Wesely M.L., Cook D.R., Hart R.L. and Speer R.E. (1985) Measurements and parameterization of particulate sulfur dry deposition over grass. *J. Geophys. Res.*, **90**(D1):2131-2143.
- Wesely M.L. (1989) Parameterization of surface resistances to gaseous dry deposition in regional scale numerical models. *Atmospheric Environment* **23**, 1293-1304.
- Wichink Kruit, R.J., W.A.J. van Pul, R.P. Otjes, P. Hofschreuder, A.F.G. Jacobs and A.A.M. Holtslag (2007) Ammonia fluxes and derived canopy compensation points over non-fertilized agricultural grassland in The Netherlands using the new gradient ammonia - high accuracy - monitor (GRAHAM). *Atmospheric Environment* **41**: 1275-1287.
- Wichink Kruit, R.J., W.A.J. van Pul, F.J. Sauter, M. van den Broek, E. Nemitz, M.A. Sutton, M. Krol and A.A.M. Holtslag (2010) Modeling the surface-atmosphere exchange of ammonia. *Atmospheric Environment*, Vol. 44, 7: 877-1004.

## 6. Wet deposition

Although the wet deposition process is complex, an attempt has been made to use as simple a parameterisation as possible, which can be applied more-or-less universally for both long-range transport and more local deposition. Two main scavenging processes are distinguished in this model: below-cloud scavenging and in-cloud scavenging. Below-cloud scavenging is important for scavenging from plumes close to sources in situations where there is no interaction with clouds yet. The rate limiting process is formed by diffusion of the substance through the pseudo-laminar air layer around the falling raindrop (Levine and Schwartz, 1982). In general, in-cloud processes are responsible for the highest wet deposition loads (Hales, 1978).

### 6.1 In-cloud scavenging

Natural storms are complex in their microphysical and dynamical structure and relations between concentrations in precipitation and the surrounding air are very variable (Barrie, 1992). Modelling of the precipitation process in transport models is usually done using either linear scavenging ratios or a numerical approach, including all the physical and chemical details of the process; there are hardly any solutions in between. The present model describes the in-cloud scavenging as a statistical process rather than as single events. The process is viewed as a discontinuous flow reactor, in which chemicals in air entering a precipitation system are transferred to other chemicals and/or precipitation. At a large distance from the source, where the pollutant is well vertically mixed and has also had the opportunity to penetrate into the cloud base, the scavenging rate of a pollutant  $A_m$  ( $\text{h}^{-1}$ ) is given by:

$$A_m = \frac{W R_i}{h}, \quad (6.1)$$

where  $R_i$  is the precipitation intensity [ $\text{m h}^{-1}$ ],  $W$  the ratio between the (initial) concentration in precipitation and the (initial) concentration in air [-], both on a weight/volume basis and at the ground level. Parameter  $h$  is the height over which wet deposition takes place [m]:

$$h = \begin{cases} 2\sigma_z, & \text{plume completely above the mixing layer} \\ z_i, & \text{otherwise,} \end{cases} \quad (6.2)$$

with  $\sigma_z$  the vertical dispersion length of the plume [m] and  $z_i$  the mixing height [m].

This formulation, when used with an empirically determined  $W$ , integrates, in fact, all the processes in and below the cloud.

#### *User specified substance*

Either a scavenging ratio  $W$  [-] or a scavenging rate  $A_m$  [ $\text{h}^{-1}$ ]<sup>(1)</sup> is to be specified by the user.  $W$  may have been determined either empirically from concentrations in rainwater and air or theoretically via Henry's constant.

#### *SO<sub>2</sub>*

Scavenging ratios for SO<sub>2</sub> have been determined from experiments. Haul (1978) derived a ratio of  $8 \cdot 10^4$  from hourly measurements of SO<sub>2</sub> and rainfall rates in the UK. Other authors used simultaneous observations of SO<sub>2</sub> and SO<sub>4</sub><sup>2-</sup> in air and precipitation to estimate scavenging ratios of both SO<sub>2</sub> and SO<sub>4</sub><sup>2-</sup> (e.g. Misra *et al.*, 1985; Chan and Chung, 1986). Chan and Chung report annual scavenging ratios of  $4.3 \cdot 10^5$  (SO<sub>4</sub><sup>2-</sup>),  $4.6 \cdot 10^4$  (SO<sub>2</sub>),  $4.7 \cdot 10^5$  (NO<sub>3</sub><sup>-</sup>) and  $4.7 \cdot 10^5$  (HNO<sub>3</sub>) for rural sites in the province of Ontario, Canada. Barrie (1981) expresses the scavenging ratio of SO<sub>2</sub> on the basis of equilibrium chemistry:

<sup>(1)</sup> in OPS input file to be specified in %/h

$$\log_{10}(W(\text{SO}_2)) = \log_{10}(K_e) + \text{pH}, \quad (6.3)$$

where  $K_e$  is an equilibrium constant related to the temperature in the following empirical relation:  $K_e = 6.22 \times 10^{-8} \exp(4755.5/T)$  ( $\text{mol l}^{-1}$ ). For  $\text{pH} = 4.75$  and  $T = 283 \text{ K}$  this results in  $W = 7.5 \times 10^4$ . A model study carried out by Scire and Venkatram (1985) supports the order of magnitude of these figures.

In OPS, the parameterisation of the  $\text{SO}_2$  scavenging ratio is based on background concentrations of  $\text{NH}_3$  and  $\text{SO}_2$ . An expression using  $\text{NH}_3/\text{SO}_2$  concentration ratios that approaches Eq. (6.3) to a large extent is:

$$W(\text{SO}_2) = 5 \cdot 10^4 \left( \frac{[\text{NH}_3]}{[\text{SO}_2]} \right), \quad (6.4)$$

where  $[\text{NH}_3]$  and  $[\text{SO}_2]$  are local concentration levels expressed in ppb (van Jaarsveld, 2004).

### *NO<sub>x</sub>*

$\text{NO}$  and  $\text{NO}_2$  have low water solubilities and their aqueous-phase nitrite and nitrate reactions are expected to be of only minor importance (Seinfeld, 1986). However, nitrogen compounds not explicitly taken into account in OPS, e.g. nitrous acid  $\text{HNO}_2$ , may contribute significantly to nitrate forming in the aqueous phase. These contributions to the wet deposition of  $\text{NO}_x$  are included in the model by assuming an  $\text{HNO}_2$  scavenging ratio of  $3.3 \cdot 10^5$  and an average  $\text{HNO}_2$  fraction in  $\text{NO}_2$  of 4%. The average  $\text{NO}_2$  scavenging ratio =  $0.04 \times 3.3 \cdot 10^5 = 1.3 \cdot 10^4$ . The scavenging ratio depends linearly on the  $\text{NO}_2/\text{NO}_x$  ratio; assuming an average  $\text{NO}_2/\text{NO}_x$  ratio of 0.65, the effective scavenging ratio for  $\text{NO}_x$  in OPS is  $2 \cdot 10^4 \cdot [\text{NO}_2]/[\text{NO}_x]$ .

### *NH<sub>3</sub>*

$\text{NH}_3$  is relatively well soluble in water. Due to reactions in droplets, the effective uptake of  $\text{NH}_3$  is highly improved and, in fact, limited by the diffusivity of  $\text{NH}_3$  in air. Measurements of  $\text{NH}_4^+$  concentrations in precipitation confirm the effectiveness of the scavenging process. There is a clear (spatial) correlation between  $\text{NH}_3$  concentrations in air and  $\text{NH}_4^+$  concentrations in precipitation (Van Jaarsveld et al., 2000). The OPS model uses an in-cloud scavenging ratio  $W = 1.4 \cdot 10^6$ .

### *particles*

OPS uses fixed scavenging ratios for each particle class, based on van Jaarsveld & Onderdelinden (1986), ranging from  $2.4 \cdot 10^5$  for small particles to  $9 \cdot 10^6$  for coarse particles (see Table 6.2).

For  $\text{SO}_4^{2-}$ ,  $\text{NO}_3^-$  and  $\text{NH}_4^+$  aerosols, scavenging ratios  $W(\text{SO}_4^{2-}) = 2.0 \cdot 10^6$ ,  $W(\text{NO}_3^-) = W(\text{NH}_4^+) = 1.4 \cdot 10^7$  are used, which means that within the duration of a single precipitation event, most of the particles will be scavenged. Similar high scavenging ratios have been derived from field experiments. The particle size dependency, as noted for below-cloud scavenging, is probably less pronounced for in-cloud scavenging.

## 6.2 Below-cloud scavenging

This process is only taken into account in the first few kilometres down-wind from a source; in the further transport stage, the scavenging process is treated as an in-cloud process parameterised with a bulk scavenging ratio. For short transport distances - where there is generally still no interaction between a plume and clouds - the scavenging of gases is determined by the flux of pollutant to falling raindrops. Local below-cloud scavenging of secondary-formed products is ignored, because the contribution to total scavenging will be very low.

### 6.2.1 Below-cloud scavenging of gases

This model uses the parameterisation of Janssen and Ten Brink (1985), who related the below-cloud scavenging rate  $A_b$  [ $\text{h}^{-1}$ ] to the precipitation intensity using the drop-size spectrum of Best (1950); we assume also that in-cloud scavenging is more efficient than below-cloud:

$$A_b = \min(\alpha_1 D_g^{\alpha_2} R_i^{\alpha_3}, A_{in}), \quad (6.5)$$

where  $D_g$  is the molecular diffusion coefficient of the species in air ( $\text{cm}^2 \text{s}^{-1}$ ) and  $\alpha_1$ ,  $\alpha_2$  and  $\alpha_3$  parameters depending on the drop-size distribution. For a lower limit of the drop-size distribution of 0.125 mm,  $\alpha_1$  has a value of 1.21,  $\alpha_2 = 0.744$  and  $\alpha_3 = 0.628$ ;  $D_g$  is expressed in  $\text{cm}^2 \text{s}^{-1}$ ,  $R_i$  (for the given values of  $\alpha$ 's) in  $\text{mm h}^{-1}$  and  $A_b$  in  $\text{h}^{-1}$ . The below-cloud scavenging rate during precipitation for a highly soluble gas like HCl will, according to Eq. (6.5), amount to  $0.45 \text{ h}^{-1}$  ( $D_g = 0.19 \text{ cm}^2 \text{s}^{-1}$  and  $R_i = 1.5 \text{ mm h}^{-1}$ ). In contrast to elevated  $\text{SO}_2$  plumes, irreversibly soluble gases such as HCl show a maximum wet deposition flux within a few hundred metres. This is also in agreement with results of the washout experiments of Ten Brink et al. (1988).

#### *User specified substance*

The below-cloud scavenging rate of gases readily soluble in water is entirely parameterised by a molecular diffusion coefficient in air ( $D_g$  in  $\text{cm}^2 \text{s}^{-1}$ ), which can be specified by the user. If not specified by the user, the model estimates  $D_g$  from (Durham et al., 1981):

$$D_g = k M^{-0.5}, \quad (6.6)$$

where  $M$  is the molecular weight [ $\text{g/mol}$ ] and  $k$  is a conversion constant ( $k = 1 \text{ cm}^2 \text{s}^{-1} \text{g}^{1/2} \text{mol}^{-1/2}$ ). Washout of sparingly soluble gases is not incorporated in this model because of its small contribution to the total wet deposition.

#### *SO<sub>2</sub>*

In the case of  $\text{SO}_2$ , the process of uptake is controlled by the (slow) conversion to bisulphite ( $\text{HSO}_3^-$ ) in the falling raindrop, which means that the  $\text{SO}_2$  concentration in the drop is in (near) equilibrium with the surrounding air (Barrie, 1978; Ten Brink et al., 1988). The approach used in this model for below-cloud equilibrium scavenging, avoids the washout peaks near sources as observed for irreversibly soluble gases (Ten Brink et al., 1988), but ignores vertical redistribution of plumes. At larger distances from a source, in-cloud scavenging will dominate the total wet deposition anyway (Hales, 1978).

#### *NO<sub>x</sub>*

Local below-cloud scavenging is assumed to be of minor importance for  $\text{NO}_x$ , because primary emitted  $\text{NO}_x$  species have low water solubility.

#### *NH<sub>3</sub>*

Eq. 6.5 is used, with molecular diffusion coefficient  $D_g = 1/17 = 0.24 \text{ cm}^2 \text{s}^{-1}$ .

### **6.2.2 Below-cloud scavenging of particles**

Wet scavenging of aerosols is an efficient process (Slinn, 1982). Falling raindrops collide with aerosol particles and collect them. Basic mechanisms are impaction, interception and Brownian motion, indicating that there is a strong dependency on particle size as well as drop size. For the below-cloud scavenging rate  $A_b$  [ $\text{h}^{-1}$ ] of particles an expression given by Janssen and Ten Brink (1985) has been adopted, which is similar to that of gases:

$$A_b = \alpha_4 \varepsilon R_i^{\alpha_5} \quad (6.7)$$

where  $\alpha_4$  and  $\alpha_5$  are drop-size distribution dependent parameters and  $\varepsilon$  is the particle-droplet collision efficiency, which is a function of both particle size and droplet size. For the same conditions as defined for Eq. (6.5),  $\alpha_4$  has a value of 1.326 and  $\alpha_5 = 0.816$ . The  $\varepsilon$  values used have been given by Slinn (1982) as a function of droplet size and range for 1 mm droplets from unity for large particles ( $> 10 \mu\text{m}$ ) down to  $10^{-4}$  for particles in the 0.1-1  $\mu\text{m}$  diameter range. In Figure 6.1,  $\varepsilon$  is plotted as a function of particle size and drop size using semi-empirical relations given by Slinn (1982). See also Table 6.2 for  $\varepsilon$  values for the 6 particle classes in OPS.



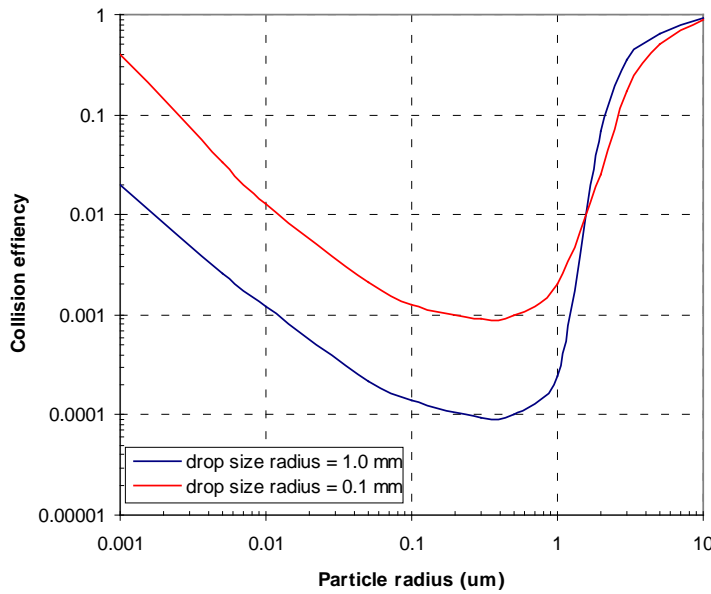


Figure 6.1 Semi-empirical relation between the collision efficiency  $\varepsilon$  and collected particle sizes for two drop sizes (Slinn, 1982).

For the below cloud scavenging rate of  $\text{SO}_4^{2-}$ ,  $\text{NO}_3^-$  and  $\text{NH}_4^+$  aerosols we use Eq. (6.7), with  $\varepsilon = 0.31$  (corresponding to particle size class 4 in Table 6.2).

### 6.3 Effects of dry and wet periods on average scavenging rates

The scavenging rates  $A=A_{in}$ ,  $A_b$  [ $\text{h}^{-1}$ ] as defined so far, refer to situations during precipitation events. What really needs describing is the wet deposition as an average for a large number of cases, including situations with no precipitation at all and situations with extended rainfall. When significant amounts of a pollutant are removed by single precipitation events, then we cannot simply use a time-averaged scavenging rate but have to account for the statistical distribution of wet and dry periods (Rodhe and Grandell, 1972). Here, it is assumed that rain events occur according to a Poisson distribution. The change in airborne pollutant mass  $M$  in time due to wet deposition is then found as (Van Egmond et al., 1986):

$$\frac{dM}{dt} = - \frac{M}{(\tau_w + \tau_d)} [1 - \exp(-A\tau_w)], \quad (6.8)$$

with  $\tau_w$  being the average length of rainfall periods and  $\tau_d$  the average length of dry periods, related to the probability of wet deposition  $P_p$  by  $P_p = \tau_w/(\tau_w + \tau_d)$ .

$P_p$  and  $\tau_w$  are determined from hourly observations of rainfall amount and duration at 12 stations, where rainfall duration is measured with a 6-min resolution. In the current version of the model,  $P_p$  and  $\tau_w$  are used with no spatial variation. Dependency on wind direction and stability is however, taken into account. It should be pointed out in this context that values for  $\tau_w$  and  $P_p$  are derived from Eulerian rainfall statistics, while they are used for a characterisation of wet deposition in a Lagrangian reference frame. Hamrud et al. (1981) found little difference between Eulerian and Lagrangian statistics by following trajectories along observation sites. Because they based their conclusions on data with a 6-h resolution, it is not certain that these findings are also valid for our case with the higher time resolution. Due to lack of

information, we assume that for large distances the Lagrangian ( $\tau_w$ ) and Eulerian ( $\tau_{w, Euler}$ ) lengths of rainfall periods are equal.

Monthly mean  $P_p$  values calculated from 12-year KNMI observations vary from 0.040 in August to 0.10 in December;  $\tau_{w, Euler}$  values vary from 1.3 h in August to 2.5 h in March. Rodhe and Grandell (1972) found much higher  $\tau_{w, Euler}$  values in Sweden: 9 h in winter and 4 h in summer. However, they based their calculations on two-hourly values of precipitation amounts. If the model is fed by 6-hourly synoptical data, then it is not possible to calculate  $\tau_w$  from the data. In such a case, fixed monthly values are used, derived from the above mentioned KNMI data.

In OPS, the following expression for  $\tau_w$  is used:

$$\tau_w = \max \left( \tau_{w, Euler} \left[ 1 - \exp \left( - \frac{0.4 \frac{x}{u}}{\tau_{w, Euler}} \right) \right], 0.1 \right). \quad (6.9)$$

The effect of this expression at short distances  $x$  is that  $\tau_w \approx 0.4 \frac{x}{u}$ ; for large distances,  $\tau_w$  is equal to  $\tau_{w, Euler}$ .

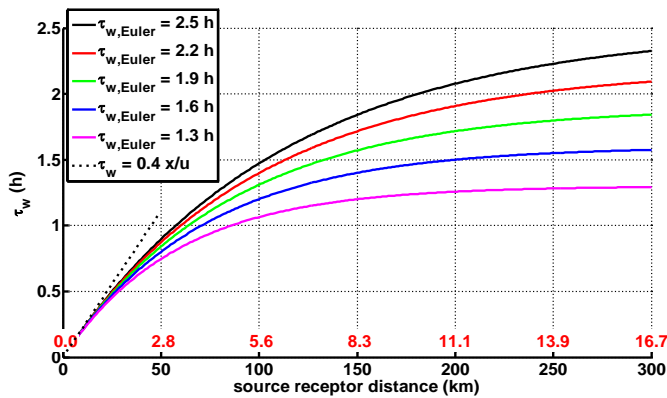


Figure 6.2 Average length of rainfall periods  $\tau_w$  as function of source receptor distance for different values of  $\tau_{w, Euler}$  (ranging from 1.3 to 2.5 h). Wind speed 5 m/s. In red the travel times in h.

The resulting effective scavenging rate  $\Lambda_{eff} [h^{-1}]$  is given by:

$$\Lambda_{eff} = \frac{P_p}{\tau_w} [1 - \exp(-\Lambda \tau_w)]. \quad (6.10)$$

At short distances  $x$ , we have  $\tau_w \approx 0.4 \frac{x}{u}$ ; this means that scavenging is not during the whole rain period, but only during 0.4 times the travel time. In this case,  $\tau_w$  is small and

$$\Lambda_{eff} = \frac{P_p}{\tau_w} [1 - \exp(-\Lambda \tau_w)] \approx \frac{P_p}{\tau_w} [1 - (1 - \Lambda \tau_w)] = \Lambda P_p \text{ ('continuous drizzle approach').}$$

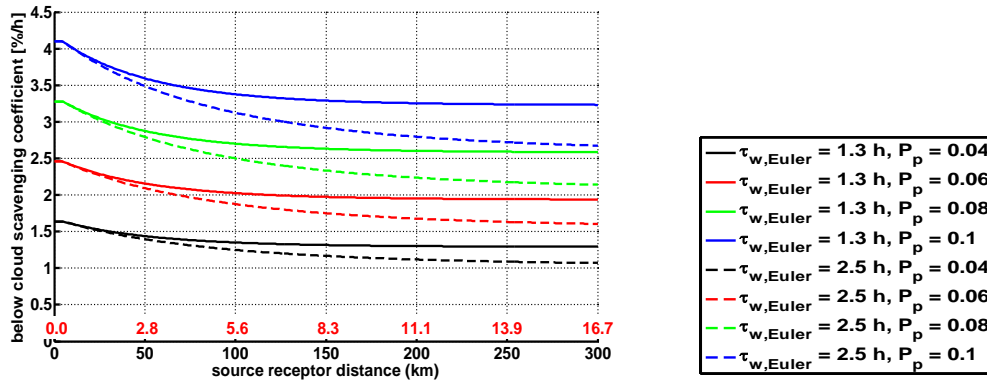


Figure 6.3 Below cloud scavenging coefficient [%/h] as function of source receptor distance for different values of  $\tau_{w,Euler}$  and precipitation probability  $P_p$ . Rain intensity 1 mm/h, wind speed 5 m/s, molecular diffusion coefficient of  $NH_3$ . In red the travel times in h.

The approach for calculating effective deposition rates on the basis of Poisson-distributed dry and wet periods as given here is checked against average rates obtained from an hour-by-hour approach in section 4.2 of van Jaarsveld (1995). Van Jaarsveld also shows that for short distances the drizzle approach is acceptable.

This model requires as input,  $W$  at the beginning of a shower (Eq. 6.1). On the basis of Poisson distributed dry and wet periods, Van Jaarsveld and Onderdelinden (1986) have given a relation between this  $W$  and  $W$ 's derived from measurements of average concentrations in air and rain:

$$W_{avg} = \frac{z_i}{R_i \tau_w} \left[ 1 - \exp\left(-\frac{W R_i}{z_i} \tau_w\right) \right]. \quad (6.11)$$

This relation sets a clear upper limit on average scavenging ratios. Assuming  $z_i = 1000$  m,  $R_i = 1.3 \cdot 10^{-3}$  m/h,  $\tau_w = 2.7$  h and  $W \rightarrow \infty$ ,  $W_{avg}$  will be  $2.8 \cdot 10^5$ . Much higher  $W_{avg}$  values derived from measurements may indicate erroneous results. For substances very effectively scavenged ( $A \rightarrow \infty$ ),  $A_{eff}$  will become equal to  $1/(\tau_w + \tau_d)$ . This means that wet deposition will be determined by the number of rain events in a certain period rather than by the amount or duration of rainfall.

## 6.4 Combined in-cloud and below-cloud scavenging

The combined below- and in-cloud scavenging rate is usually much higher than the below-cloud scavenging rate. On the other hand, in-cloud scavenging can only have effect if the pollutant is able to penetrate clouds. Plumes from high stacks and especially those with additional plume rise will be sucked more into convective clouds than surface-based plumes. The time scale on which plumes reach the cloud base is tentatively taken as the time in which the vertical dimension of plumes will grow equal to the difference between the effective plume height and the assumed cloud base height, where the cloud base height is taken equal to the mixing height. In addition, a processing time within the cloud is assumed before full in-cloud scavenging can take place. This time can be translated into an additional shift  $\Delta z$  in the distance between stack and cloud base. This results in the following expression for the wet scavenging rate of irreversibly (superscript  $i$ ) soluble substances  $A_{w,eff}^i$  [ $h^{-1}$ ], describing the gradual change from below-cloud scavenging ( $pr = 0$ ), to in-cloud scavenging ( $pr = 1$ ):

$$A_{w,eff}^i = A_{in,eff} pr + A_{b,eff} (1 - pr), \quad , \quad pr = \exp\left[-\frac{(h' + \Delta z)^2}{2 \sigma_z^2 c_w}\right] \quad (6.12)$$

with  $\Delta z = 5$  m and where  $h'$  and  $c_w$  are defined as:

$$\begin{aligned}
 &\text{point sources : } h' = \max(0, z_i - h); \quad c_w = 1 \\
 &\text{within area sources : } h' = z_i - h + \sigma_z \left( \frac{s_a/2 - x}{s_a/2} - 1 \right); \quad c_w = 3, \\
 &\text{outside area sources : } h' = z_i - h - \frac{s_a^3}{1600 x^2}; \quad c_w = 1.
 \end{aligned} \tag{6.13}$$

For short travel times  $t = x/u$  [h] (shorter than 1 hour, close to the source), we use an extra correction to correct for the fact that in a very small plume with high concentrations there is no instantaneous wet scavenging of all material:

$$pr = pr \cdot t, \quad 0 < t < 1 \text{ h}. \tag{6.14}$$

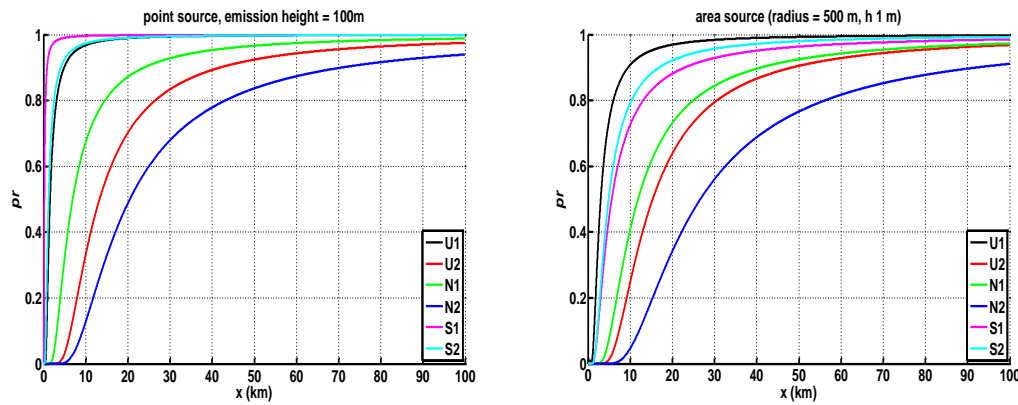


Figure 6.4: Distributing factor  $pr$  (according to Eq. 6.12) between below-cloud and in-cloud scavenging as function of source-receptor distance  $x$  for different meteo classes  $U$ : unstable,  $N$ : neutral,  $S$ : stable.  $\sigma_z$  computed as a  $x^b$ , (see eq. 3.18), mixing height as in Table 2.5).  $pr = 0 \rightarrow$  below cloud scavenging,  $pr = 1 \rightarrow$  in-cloud scavenging. Left panel: point source with emission height 100 m, right panel: area source with emission height of 1 m. Note that in the case of a point source in meteo class  $S1$ , the emission is above the mixing height.

## 6.5 Scavenging of reversibly soluble gases

When concentrations in air and droplets are in (near) equilibrium during the scavenging process due to limited solubility and/or slow reactions in the drop, a correction for the concentration in air at the ground is used for the scavenging rate of reversibly (superscript  $r$ ) soluble substances  $A_{w,eff}^r$  [ $\text{h}^{-1}$ ]:

$$A_{w,eff}^r = A_{w,eff}^i \frac{C(z=0)}{\overline{C(z)}}, \tag{6.15}$$

where  $\overline{C(z)}$  is the average mixed-layer concentration. This solution ignores any vertical redistribution of plumes as is the case when the equilibrium is not instantaneous. An example of a reversibly soluble gas is  $\text{SO}_2$ . This gas is slowly converted to bisulphite ( $\text{HSO}_3^-$ ) in falling raindrops and the  $\text{SO}_2$  concentration in the drops is in (near) equilibrium with the surrounding air (Barrie, 1978). The approach followed here implies that as long as elevated  $\text{SO}_2$  plumes do not touch the ground close to the source, they have no impact on wet deposition. This is confirmed by washout experiments (Ten Brink et al., 1988).  $\text{NH}_3$  is treated as an irreversibly soluble gas, because  $\text{NH}_3$  inside the droplets is assumed to be quickly converted to  $\text{NH}_4^+$ .

For three examples of this equilibrium process, see Figure 6.5.

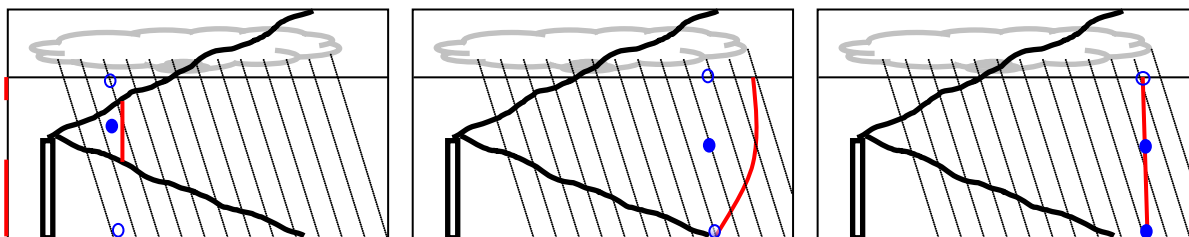


Figure 6.5: Wet deposition process for reversibly soluble gases; cloud base at the mixing height. In black the stack and plume, in red the vertical concentration profile, the blue dots are droplets. In the left panel, the plume has not yet reached the ground and pollutant caught inside the droplet evaporates below the plume: ratio  $C(z=0)/\overline{C(z)} = 0 \rightarrow$  no net wet deposition. In the middle panel, the droplet gets saturated with pollutant in the upper part of the plume; in the lower part, due to a lower concentration outside of the droplet, the pollutant in the droplet evaporates and the net wet deposition decreases by the ratio  $C(z=0)/\overline{C(z)}$ . In the right panel, we have a well mixed plume ( $C(z=0)/\overline{C(z)} = 1$ ) and now the concentration remains the same in the lower part of the plume.

## 6.6 Overview of wet scavenging parameters

Table 6.1 Wet scavenging parameters for acidifying components as applied in OPS

Component	below-cloud scavenging	in-cloud scavenging
		scavenging ratio $W$ (Eq. 6.1)
<u>Primary:</u>		
SO <sub>2</sub>	yes, reversible (Eq. 6.5, 6.15)	$5 \cdot 10^4 \cdot [\text{NH}_3]/[\text{SO}_2]$
NO <sub>x</sub>	no	$2 \cdot 10^4 \cdot [\text{NO}_2]/[\text{NO}_x]$
NO	no	0
NO <sub>2</sub>	no	0
HNO <sub>2</sub>	no	$3.3 \cdot 10^5$
PAN	no	0
NH <sub>3</sub>	yes, irreversible (Eq. 6.5) $D_g = 0.24 \text{ cm}^2 \text{ s}^{-1}$	$1.4 \cdot 10^6$
<u>Secondary:</u>		
SO <sub>4</sub> <sup>2-</sup> aerosol	yes, Eq. 6.7, $\varepsilon = 0.31$	$2.0 \cdot 10^6$
NH <sub>4</sub> <sup>+</sup> aerosol	yes, Eq. 6.7, $\varepsilon = 0.31$	$1.4 \cdot 10^7$
NO <sub>3</sub> t	yes, Eq. 6.7, $\varepsilon = 0.31$	$1.4 \cdot 10^7$
NO <sub>3</sub> <sup>-</sup> aerosol	yes, Eq. 6.7, $\varepsilon = 0.31$	$1.4 \cdot 10^7$
HNO <sub>3</sub>	no	$1.4 \cdot 10^7$

# [SO<sub>2</sub>] and [NH<sub>3</sub>] are average background concentrations (ppb) in the area between source and receptor.

Table 6.2 Wet deposition parameters for 6 particle classes, as used in OPS.

particle size classes		1	2	3	4	5	6
size range	µm	<0.95	0.95-2.5	2.5-4	4-10	10-20	>20
mass median diameter	µm	0.2	1.6	3	6	14	40
standard distribution fine	%	70	12	8	5.5	2.5	2
standard distribution medium	%	53	16	12	11.5	4.2	3.3
standard distribution coarse	%	42	19	14	14.5	5.9	4.6
in-cloud scavenging ratio	(-)	$2.4 \cdot 10^5$	$1 \cdot 10^6$	$1 \cdot 10^6$	$5 \cdot 10^6$	$9 \cdot 10^6$	$9 \cdot 10^6$
collision efficiency $\epsilon$ (Figure 6.1, Slinn, 1982)	(-)	$1.2 \cdot 10^{-4}$	$3 \cdot 10^{-4}$	$5 \cdot 10^{-4}$	0.31	0.9	1

It might be clear that any form of reactive scavenging in this model is based on empirical parameters. Extrapolating to situations very different from those where parameters were derived can lead to significant errors in the computed wet deposition.

## 6.7 Verification and validation studies

A comparison between the parameterisations of Barrie (1981) for SO<sub>2</sub> scavenging and the one used in OPS, depending on the NH<sub>3</sub>/SO<sub>2</sub> ratio, can be found in van Jaarsveld (2004). Wet deposition fluxes in the Netherlands are compared to measurements for the period 1980-2002 in van Jaarsveld (2004). A comparison between modelled and measured wet deposition levels of ammonium, nitrate and sulphate over the period 1992-2008 was reported in van der Swaluw et al. (2011).

## 6.8 References

- Barrie L.A. (1978) An improved model of reversible SO<sub>2</sub>-washout by rain. *Atmospheric Environment* **12**, 407-412.
- Barrie L.A. (1981) The prediction of rain acidity and SO<sub>2</sub> scavenging in eastern North America. *Atmospheric Environment* **15**, 31-41.
- Barrie L.A. (1992) Scavenging ratios: black magic or a useful scientific tool? In: Schwartz S.E. and Slinn W.G.N, editors. *Precipitation scavenging and atmosphere-surface exchange*, Volume 1. Hemisphere Publ. Corp., Washington. p. 403-419.
- Best A.C. (1950) The size distribution of raindrops. *Quart. J.R. meteor. Soc.* **76**, 16-36.
- Chan W.H. and Chung D.H.S. (1986) Regional-scale precipitation scavenging of SO<sub>2</sub>, SO<sub>4</sub>, NO<sub>3</sub>, and NHO<sub>3</sub>. *Atmospheric Environment* **20**, 1397-1402.
- Durham J.L., Overton J.H., and Aneja V.P. (1981) Influence of gaseous nitric acid on sulfate production and acidity in rain. *Atmospheric Environment* **15**, 1059-1068.
- Hales J.M. (1978) Wet removal of sulfur compounds from the atmosphere. *Atmospheric Environment* **12**, 389-399.
- Hamrud M., Rodhe H. and Grandell J. (1981) A numerical comparison between Lagrangian and Eulerian rainfall statistics. *Tellus* **33**, 235-241.
- Haul P.R. (1978) Preliminary estimates of the washout coefficient for sulphur dioxide using data from an East Midlands ground level monitoring network: Short communication. *Atmospheric Environment* **12**, 2515-2517.
- Janssen A.J. and Brink H.M. ten (1985) De samenstelling van neerslag onder een rookgaspluim: modellering, berekening en validatie. Netherlands Energy Research Foundation, Petten, the Netherlands. Report ECN-170.
- Levine S.Z. and Schwartz S.E. (1982) In-cloud and below-cloud scavenging of nitric acid vapor. *Atmospheric Environment* **16**, 1725-1734
- Marshall J.S. and Palmer M.W.M. (1948) The distribution of raindrops with size. *J. Meteorol.* **5**, 165-166.
- Misra P.K., Chan W.H., Chung D. and Tang A.J.S. (1985) Scavenging ratios of acidic pollutants and their use in long-range transport models. *Atmospheric Environment* **19**, 1471-1475.

- Rodhe H. and Grandell J. (1972) On the removal time of aerosol particles from the atmosphere by precipitation scavenging. *Tellus* **XXIV**, 442-454.
- Scire J.S. and Venkatram A. (1985) The contribution of in-cloud oxidation of SO<sub>2</sub> to wet scavenging of sulfur in convective clouds. *Atmospheric Environment* **19**, 637-650.
- Seinfeld J.H. (1986) *Atmospheric chemistry and physics of air pollution*. John Wiley & Sons, New York.
- Slinn W.G.N (1982) Predictions for particle deposition to vegetative canopies. *Atmospheric Environment* **16**, 1785-1794.
- Ten Brink H.M., Janssen A.J. and Slanina J. (1988) Plume wash-out near a coal-fired power plant: measurements and model calculations. *Atmospheric Environment* **22**, 177-187.
- Van der Swaluw, Eric, Asman, Willem A.H., van Jaarsveld, Hans, Hoogerbrugge, Ronald (2011). Wet deposition of ammonium, nitrate and sulfate in the Netherlands over the period 1992–2008, *Atmospheric Environment*, Volume 45, Issue 23, July 2011, Pages 3819-3826, 10.1016/j.atmosenv.2011.04.017.
- Van Egmond N.D., Jaarsveld J.A. van and Onderdelinden D. (1986) The Dutch aerosol study: general overview and preliminary results. In: Lee S.D, Schneider T., Grant, L.D. and Verkerk P.J., editors. In: *Aerosols: Research, Risk Assessment and Control Strategies*. Lewis Publ., Chelsea, USA. p. 269-282.
- Van Jaarsveld and Onderdelinden (1986): Modelmatige beschrijving van concentratie en depositie van kolen relevante componenten in NL veroorzaakt door emissies in Europa, PEO report NOK-LUK 3, RIVM report 2282 02 002, Bilthoven, the Netherlands.
- Van Jaarsveld J. A. (1995) Modelling the long-term atmospheric behaviour of pollutants on various spatial scales. Ph.D. Thesis, Utrecht University, the Netherlands
- Van Jaarsveld, J.A., Bleeker, A. and Hoogervorst, N.J.P. (2000) Evaluatie ammoniakredukties met behulp van metingen en modelberekeningen. RIVM rapport 722108025, RIVM, Bilthoven.
- Van Jaarsveld J.A. (2004) Description and validation of OPS-Pro 4.1, RIVM report 500045001/2004.

## 7. Chemical transformation

In the OPS model, the chemical transformation process is modelled as a reaction which transforms a primary emitted species into one or two secondary species, which are transported in the same plume. No special local (near the emission source) dispersion and deposition effects are taken into account for reaction products, because these products will be formed gradually after the primary pollutant is emitted into the atmosphere. Conversion rates can be parameterised as functions of parameters such as global radiation, temperature, time of day or others included in the climatological data set created by the pre-processor. It is not possible to use conversion rates in dependence of absolute species concentrations, since concentration distributions of sources are calculated independently.

The set-up of the present model permits only a description of a reaction rate by a pseudo first-order reaction rate constant  $k_c$ . The differential equation for the pollutant concentration  $C$  is then given by:

$$\frac{dC}{dt} = k_c C \quad (7.1)$$

$k_c$  is not necessarily a constant, but can also be taken as a function of time of day, radiation, temperature etc. If  $k_c$  is a function of the actual concentration  $C$ , OPS linearises the differential equation by using not the actual concentration, but a background concentration, which is read from yearly averaged background concentration maps. The necessary relationships for  $k_c$  can be provided by chemically more detailed models.

### 7.1 Non-acidifying substances

The chemical conversion rate  $k_c$  for gaseous substances can be given as a constant and/or as a variable related to the solar radiation measured in a certain period. This conversion rate can be specified using two parameters:

$a$  - a constant conversion rate [% h<sup>-1</sup>]

$b$  - a variable conversion rate, dependent on the solar radiation [% h<sup>-1</sup> W<sup>-1</sup> m<sup>2</sup>].

$b$  varies from one stability/mixing height class to the other. The model calculates the conversion rate  $k_c$  [% h<sup>-1</sup>] for a given class according to:

$$k_c = a + b Q_r, \quad (7.2)$$

where  $Q_r$  is the global solar radiation [W m<sup>-2</sup>], which has been incorporated in the meteo-statistics as a function of the meteorological class. Long-term average values of  $Q_r$  in the Netherlands are given in Table 7.1.

Table 7.1 Average global radiation [W m<sup>-2</sup>] per (local) stability class

	U1	U2	N1	N2	S1	S2
Global radiation $Q_r$ [W m <sup>-2</sup> ]	206	378	20	22	2	3

When running the model for multiple sources, the effective value of the conversion rate cannot be precisely determined beforehand as solar radiation and its variation over the day depend on the stability/mixing height class. The model calculates this effective value from a mass-weighted



averaging of the conversion rates of the separate classes and emission sources, and is as such included in the model output.

In contrast with the acidifying compounds, the conversion process is envisaged here exclusively as a removal term. Dispersion and deposition of the reaction product(s) are not included.

## 7.2 Acidifying and eutrophying substances

As already described in the introductory section, the acidifying and eutrophying components include:

sulphur compounds ( $\text{SO}_x$ )	sulphur dioxide ( $\text{SO}_2$ ) sulphate ( $\text{SO}_4^{2-}$ )
oxidised nitrogen compounds ( $\text{NO}_y$ )	nitrogen oxides (NO and $\text{NO}_2$ ) peroxyacetyl nitrate (PAN) nitrous acid ( $\text{HNO}_2$ ) nitric acid ( $\text{HNO}_3$ ) nitrate ( $\text{NO}_3^-$ )
reduced nitrogen compounds ( $\text{NH}_y$ )	ammonia ( $\text{NH}_3$ ) ammonium ( $\text{NH}_4^+$ )

The gaseous  $\text{SO}_2$ ,  $\text{NO}_x$  (largely in the form of NO, a small fraction is emitted as  $\text{NO}_2$ ) and  $\text{NH}_3$  are primary emitted pollutants, while the gaseous  $\text{NO}_2$ , PAN,  $\text{HNO}_2$  and  $\text{HNO}_3$  and the non-gaseous  $\text{SO}_4^{2-}$ ,  $\text{NO}_3^-$  and  $\text{NH}_4^+$  are formed from the primary pollutants in the atmosphere under influence of concentrations of, for example, ozone ( $\text{O}_3$ ) or free OH-radicals. In OPS, however, the primary oxidised nitrogen pollutant is defined as the sum of NO and  $\text{NO}_2$ , further denoted as  $\text{NO}_x$ . The secondary products  $\text{SO}_4^{2-}$ ,  $\text{NO}_3^-$  and  $\text{NH}_4^+$  form mainly ammonia salts having low vapour pressures and consequently appearing as aerosols in the atmosphere (Stelson and Seinfeld, 1982a). The life cycles of the sulphur, nitrogen oxide and ammonium compounds taken into account in the model are given in Figure 7.1.

In case of sulphur and reduced nitrogen, one primary ( $\text{SO}_2$  and  $\text{NH}_3$ , respectively) and one reaction product is transported ( $\text{SO}_4^{2-}$  and  $\text{NH}_4^+$ , respectively) while for oxidised nitrogen, one primary ( $\text{NO}_x = \text{NO} + \text{NO}_2$ ) and two reaction products ( $\text{HNO}_3$  and  $\text{NO}_3^-$ ) are transported.


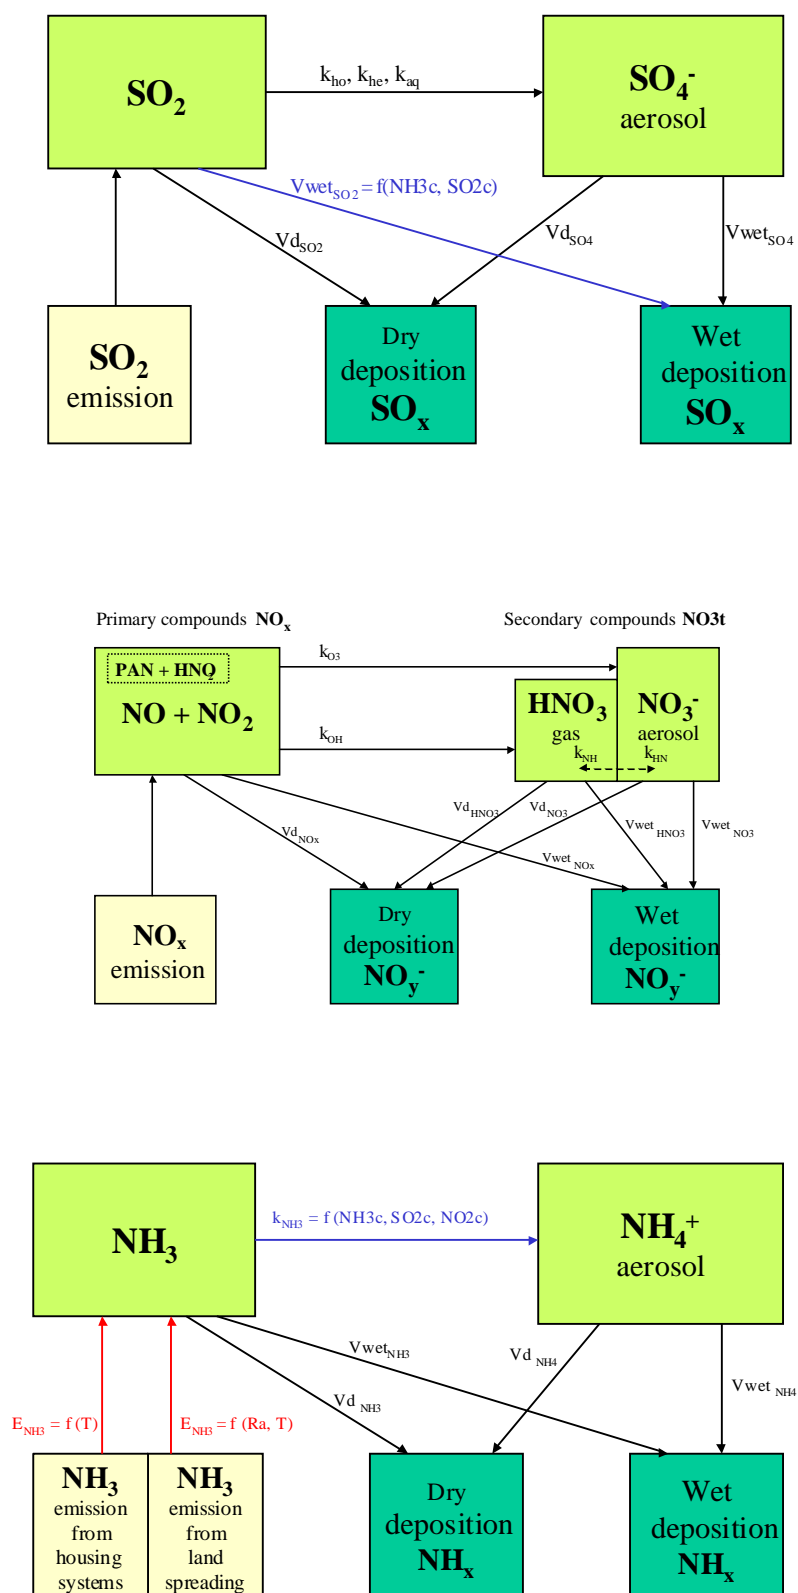


Figure 7.1: Emission, conversion and deposition paths of the OPS model for acidifying compounds.

## 7.2.1 Sulphur compounds

Combustion of fossil fuels is the main source of atmospheric SO<sub>2</sub> in industrialised areas. The atmospheric chemistry of sulphur can be divided into gas-phase, heterogeneous and aqueous-phase reactions. From the gas-phase reactions the most important is the oxidation by OH radicals:



Prevailing evidence indicates that the HOSO<sub>2</sub> radical ultimately leads to the formation of H<sub>2</sub>SO<sub>4</sub>, with regeneration of the OH radical (Stockwell and Calvert, 1983):



Heterogeneous reactions are defined here as reactions taking place within or on solid or aqueous particles other than cloud droplets. The primary process in this kind of reactions is the adsorption of SO<sub>2</sub> by particles in which humidity plays an important role (Liberti *et al.*, 1978). Subsequent conversion of adsorbed SO<sub>2</sub> into sulphate depends highly on the nature of the aerosol. Using reaction chamber experiments, Haury *et al.* (1978) showed that SO<sub>2</sub> oxidation is catalysed through the presence of transition metals, but that their results cannot be easily generalised and applied to atmospheric conditions. Möller (1980) suggests initial oxidation rates in industrial plumes larger than  $1 \times 10^{-5} \text{ s}^{-1}$ , but only a small portion of atmospheric SO<sub>2</sub> will be oxidised in this way due to saturation of the particle surface. For the heterogeneous reactions an overall average oxidation rate of  $1.7 \times 10^{-6} \text{ s}^{-1}$  is adopted here, which is 20% higher than the value suggested by De Leeuw *et al.* (1985).

Aqueous-phase processes encompass extensive chemical transformations, many of them being oxidative in nature. In addition, there are numerous rapid equilibria in the aqueous phase. The importance of the aqueous phase transformation has been emphasised by many researchers. e.g. Möller (1980) and Lamb *et al.* (1987). Oxidation in cloud water by dissolved ozone (O<sub>3</sub>), hydrogen peroxide (H<sub>2</sub>O<sub>2</sub>) and by O<sub>2</sub> catalyzed by metal ions are generally indicated as the most important mechanisms. Some authors suggest a dominating influence of NH<sub>3</sub> (pH > 5) on the oxidation of aqueous SO<sub>2</sub> (Stelson *et al.*, 1979; Behra *et al.*, 1989). This phenomenon is especially important in areas with high NH<sub>3</sub> emissions such as the Netherlands, which means that in the present case overall conversion rates are expected to be higher than elsewhere. An average oxidation rate in water droplets was estimated by Möller (1980) at  $5.0 \times 10^{-5} \text{ s}^{-1}$ . A value of  $4 \times 10^{-5} \text{ s}^{-1}$  is currently used in the OPS model.

A suitable parameterisation of aqueous-phase processes for the present model cannot be more than a bulk parameterisation i.e. considering clouds as black boxes passing by at a certain probability with SO<sub>2</sub> going in and sulphate aerosol coming out at a certain rate. A parameter suitable to indicating the presence of clouds would be the observed cloud cover. Since this parameter is not directly available in the meteorological data set used, the precipitation probability  $P_p$  was chosen instead. This parameter is more representative for the presence of precipitating clouds and, averaged over a longer period, might also be indicative for non-precipitating clouds.

Under European conditions, most of the H<sub>2</sub>SO<sub>4</sub> will react with NH<sub>3</sub> to yield an NH<sub>4</sub><sup>+</sup> containing aerosol. This is a one-way reaction and the aerosol will not evaporate again:



and



These reactions form the link between sulphur and ammonia in the atmosphere.

### 7.2.1.1 Implementation of SO<sub>x</sub> chemistry in the model

The following rate expression for the formation of SO<sub>4</sub><sup>2-</sup> aerosol includes contributions from the gas-phase, heterogeneous and aqueous-phase oxidation:

$$\frac{d[\text{SO}_4^{2-}]}{dt} = (k_{ho}[\text{OH}] + k_{he} + k_{aq} f_{aq} P_p)[\text{SO}_2], \quad (7.7)$$

where  $k_{ho}$ ,  $k_{he}$  and  $k_{aq}$  are the respective gas-phase, heterogeneous and aqueous-phase oxidation rates and  $P_p$  the (measured) precipitation probability;  $f_{aq}$  is an empirical factor that not only accounts for the ratio cloud presence/precipitation duration, but also for the fact that the aqueous-phase sulphate formed will only partly appear as sulphate aerosol in the air. Both effects are assumed to be of equal importance ( $f_{aq} = 1$ ). The OH radical concentration [ $\text{molec cm}^{-3}$ ] is taken to be proportional to the global radiation  $Q_r$  [ $\text{W m}^{-2}$ ] following Van Egmond and Kesseboom (1985):

$$[\text{OH}] = c_r Q_r, \quad (7.8)$$

where  $c_r$  is a proportionality constant [ $\text{molec cm}^{-3} \text{W}^{-1} \text{m}^2$ ]. Both  $Q_r$  and  $P_p$  are part of the meteorological input data set of the model. By parameterising  $[\text{OH}]$  as a function of  $Q_r$ , the diurnal and seasonal variations are automatically included for the gas-phase oxidation. Parameter values used in the model are listed in Table 7.2. A value of  $7.35 \times 10^3$  is calculated for  $c_r$  on the basis of an average noontime OH concentration for sunny days in summer months of  $1.6 \times 10^6 \text{ molec cm}^{-3}$ , as measured in Jülich (Germany) in the 1980-1983 period (Hübler *et al.*, 1984; Perner *et al.*, 1987). Van Egmond and Kesseboom (1985) estimated a  $c_r$  value of  $3.54 \times 10^3$  for the winter half year (October-April). The annual mean for the OH concentration of  $0.59 \times 10^6 \text{ molec cm}^{-3}$  obtained using Eq. (7.8) falls within the range of  $(0.3\text{--}3) \times 10^6 \text{ molec cm}^{-3}$ , a result found in a literature review by Hewitt and Harrison (1985). Total SO<sub>2</sub> calculated oxidation rates range from  $1.7 \times 10^{-6} \text{ s}^{-1}$  on clear nights to  $9.0 \times 10^{-6} \text{ s}^{-1}$  in daytime in the summer, with a yearly average rate of  $6.4 \times 10^{-6} \text{ s}^{-1}$ . The EMEP (Lagrangian) model uses a sine function to describe the total oxidation rate throughout the year with a minimum daily value in December of  $1 \times 10^{-6}$  to  $5 \times 10^{-6} \text{ s}^{-1}$  (daily average in June) with a yearly average of  $3 \times 10^{-6} \text{ s}^{-1}$  (Iversen *et al.*, 1991).

Table 7.2 Kinetic data and reaction rates [ $\text{cm}^3 \text{molec}^{-1} \text{s}^{-1}$ ] for sulphur compounds used in the model

Parameter	Used in relation <sup>a</sup>	Remarks	Value	Ref. <sup>b</sup>	Units
$c_r$	$[\text{OH}] = c_r Q_r$	summer (Apr.-Oct.)	7345	(1),(7)	$\text{molec cm}^{-3} \text{W}^{-1} \text{m}^2$
		winter (Oct.-Apr.)	3540		
		yearly average	5443		
$k_{ho}$	$\text{SO}_2 + \text{OH} \rightarrow \text{sulphate}$	gas phase	$3.44 \cdot 10^{-12}$	(2) <sup>c</sup>	$\text{cm}^3 \text{molec}^{-1} \text{s}^{-1}$
$k_{he}$	$\text{SO}_2 \rightarrow \text{sulphate}$	Particle phase	$1.7 \cdot 10^{-6}$	(3)	$\text{s}^{-1}$
$k_{aq}$	$\text{SO}_2 \rightarrow \text{sulphate}$	Aqueous phase	$4.0 \cdot 10^{-5}$	(9)	$\text{s}^{-1}$

<sup>a)</sup> All concentrations in  $\text{molec cm}^{-3}$ ; global radiation  $Q_r$  in  $\text{W m}^{-2}$

<sup>b)</sup> (1) Van Egmond and Kesseboom (1985); (2) Calvert *et al.* (1978); (3) de Leeuw *et al.* (1985) report  $1.4 \cdot 10^{-6}$ ; (7) Hewitt and Harrison (1985); (9) adapted from Möller (1980), Möller gives  $5.0 \cdot 10^{-5}$

<sup>c)</sup> Calvert *et al.* (1978) report  $1.1 \cdot 10^{-12} \text{ cm}^3 \text{molec}^{-1} \text{s}^{-1}$ .

## 7.2.2 Nitrogen oxides

As stated earlier, this model was not set up to simulate complex chemistry. All relations between chemical components must be described as first-order or pseudo first-order relations. However, the structure of the model allows for easy inclusion of empirical or semi-empirical parameterisations. A brief overview of the most important reaction paths and their parameterisation follows.

The relation between concentrations of NO, NO<sub>2</sub> and O<sub>3</sub> is to a large extent explained by the photo-stationary equilibrium:




where the equilibrium constant is proportional to the UV intensity.

The reaction of NO<sub>2</sub> with OH to form nitric acid is the main chemical loss mechanism for NO<sub>2</sub> during daytime:



At night, NO<sub>2</sub> is assumed to be lost by reaction with ozone to form particulate nitrate through the following series of reactions:



Hov *et al.* (1988) suggest that in a night-time situation the first reaction in (7.11) will be the rate-determining step. The net reaction can be written as  $2\text{NO}_2 + \text{O}_3 + \text{H}_2\text{O} \rightarrow 2\text{NO}_3^- + 2\text{H}^+ + \text{O}_2$ , with a reaction rate  $k_{\text{O}_3}$  of  $2.1 \times 10^{-13} \exp(-2450/T) \text{ cm}^3 \cdot \text{molecule}^{-1} \text{ s}^{-1}$ . This leads to an average night-time NO<sub>2</sub> > NO<sub>3</sub><sup>-</sup> conversion rate of  $2.4 \times 10^{-5} \text{ s}^{-1}$ . Other authors consider the hydrolysis reaction (7.11 iii) as limiting ( $k = 1.3 \times 10^{-21} \text{ cm}^3 \text{ molec}^{-1} \text{ s}^{-1}$ ), leading to much lower rates. Van Egmond and Kesseboom (1983) used a first-order rate of  $5.56 \times 10^{-6} \text{ s}^{-1}$  for the night-time NO<sub>2</sub> > NO<sub>3</sub><sup>-</sup> conversion, the rate adopted in the OPS model.

During daylight hours, the NO<sub>3</sub> radical formed in (7.11) will be decomposed due to photolysis reactions of which  $\text{NO}_3 + h\nu \rightarrow \text{NO}_2 + \text{O}$  is the most important (Magnotta and Johnston, 1980).

Other (temporary) sinks for NO<sub>2</sub> are the reaction with peroxyacetyl radicals, resulting in the formation of peroxyacetyl nitrate (PAN):



and reactions which form nitrous acid (HNO<sub>2</sub>):



The decomposition of PAN is an important function of temperature (Hov *et al.*, 1988). Measurements in Delft carried out by TNO indicate a PAN concentration which, on average, is only in the order of 5% of the NO<sub>2</sub> concentration (Ogilvie, 1982). The deposition properties are also uncertain but probably not very different from those of NO<sub>2</sub>; it was therefore decided not to take PAN into account as a separate component for this model but to consider it as a part of NO<sub>x</sub>.

Nitrous acid ( $\text{HNO}_2$ ) has been studied far less extensively than for example,  $\text{HNO}_3$ . The build-up of  $\text{HNO}_2$  observed during the night-time hours is still not fully explained; heterogeneous pathways have been favoured by Kessler and Platt (1984), for example. Heikes and Thompson (1983) have shown, however, that an aerosol formation mechanism is physically unlikely. The overall reaction (7.13) was postulated on results of smog chamber experiments (Cox and Jenkin, 1987; Lammel *et al.*, 1989). Rapid photolytic decomposition takes place during the day. Slanina *et al.* (1990) report average  $\text{HNO}_2$  concentrations of 0.64 ppb for a forest site in the Netherlands (Speulderbos), which is in the order of 4 % of  $\text{NO} + \text{NO}_2$  concentrations. Similar results are reported by Kitto and Harrison (1992).

The gaseous nitric acid may react with ammonia to form ammonium nitrate aerosol:



Temperature and relative humidity have a great influence on the equilibrium concentration of  $\text{NH}_4\text{NO}_3$ . Stelson and Seinfeld (1982b) indicate equilibrium constants at 80% relative humidity of 0.3 ppb<sup>2</sup> at 10 °C and 10 ppb<sup>2</sup> at 25 °C. Due to the relatively high ammonia concentrations in the Netherlands and other European countries, it may be expected that nitrate aerosol is the dominant form, especially in wintertime.

### 7.2.2.1 Implementation of $\text{NO}_y$ chemistry in the model

Modelling concentrations of  $\text{NO}_2$  using the photo-stationary equilibrium reaction (7.9) requires estimates of  $\text{O}_3$  (background) concentrations on a local scale. Such  $\text{O}_3$  concentrations are strongly influenced by neighbouring NO sources, making this approach unsuited to this model. Basically, the OPS model calculates contributions of sources independent of each other, so empirical relations between NO and  $\text{NO}_2$  concentrations cannot be used unless the 'background'  $\text{NO}_2$  concentration is taken into account. An alternative would be an iterative approach, i.e. first calculating total concentrations linearly and then the non-linear relations using the results of the first step as the background levels. The calculated  $\text{NO}_2$ , PAN and  $\text{HNO}_2$  concentrations would not be very accurate anyway. These considerations have led to the choice of modelling the sum of NO,  $\text{NO}_2$ , PAN and  $\text{HNO}_2$  as a single conservative species  $\text{NO}_x$ . The  $\text{NO}_2$  concentration needed in the reactions (7.10) - (7.11) is taken as a fraction of the calculated  $\text{NO}_x$  concentration. Necessary  $\text{NO}_2/\text{NO}_x$  ratios are derived from observations as a function of atmospheric stability and trajectory length according to the classification of meteorological situations used in the model. Furthermore, the model uses maps of (prescribed) annual mean background concentrations of  $\text{SO}_2$ ,  $\text{NO}_2$  and  $\text{NH}_3$  as a basis for spatial and annual differences in chemistry parameterisations. Because the  $\text{NO}_x$  species have rather different dry and wet deposition properties, the deposition properties of  $\text{NO}_x$  are adjusted using the aforementioned  $\text{NO}_2/\text{NO}_x$  ratios and a (fixed)  $\text{HNO}_2/\text{NO}_x$  ratio.

Note that modelled ' $\text{NO}_x$ ' consist of  $\text{NO} + \text{NO}_2 + \text{HNO}_2 + \text{PAN}$ , including a 4% contribution of  $\text{HNO}_2$  and a possible PAN contribution of 5% to the  $\text{NO}_2$  concentration. However, measurements of  $\text{NO}_x$  usually consist only of  $\text{NO} + \text{NO}_2$ . At an average  $\text{NO}_2/\text{NO}_x$  ratio of 0.65, the modelled  $\text{NO}_x$  ( $\text{NO} + \text{NO}_2 + \text{HNO}_2 + \text{PAN}$ ) concentration may be systematically 8% higher than measured  $\text{NO}_x$  ( $\text{NO} + \text{NO}_2$ ) concentrations. In order to keep the model output consistent to reported concentrations, an extra 8% reduction is applied to the model output of  $\text{NO}_x$  concentrations.

Secondary-formed species are much less influenced by local sources. In such cases it is much less of a problem to use empirical, averaged relations between NO,  $\text{NO}_2$  and  $\text{O}_3$ . The production of  $\text{HNO}_3$  for a given class  $s$ , and a transport distance  $x$ , is modelled as:

$$\frac{d(\text{HNO}_3)}{dt} = k_{OH} [\text{OH}(x,s)] r_{n,eff}(x,s) [\text{NO}_x], \quad (7.15)$$

similarly to the time averaged nighttime formation of  $\text{NO}_3^-$ :

$$\frac{d[\text{NO}_3^-]}{dt} = k_{O_3} [\text{NO}_x] f_n(x,s), \quad (7.16)$$

where  $k_{OH}$  is the second-order reaction rate constant ( $\text{molec}^{-1} \text{cm}^3 \text{s}^{-1}$ ) of reaction (7.10) and  $k_{O_3}$  the first-order rate ( $\text{s}^{-1}$ ) of reaction (7.11).  $[\text{OH}(x,s)]$  is the OH radical concentration ( $\text{molec cm}^{-3}$ ) calculated with Eq. (7.8),  $r_{n,eff}(x,s)$  the spatially variable  $\text{NO}_2/\text{NO}_x$  ratio, and  $f_n(x,s)$  the relative frequency of occurrence of night-time hours. Values for  $k_{OH}$  and  $k_{O_3}$  are given in Table 7.3.

Table 7.3 Kinetic data and reaction rates for  $\text{NO}_y$  compounds used in the OPS model

Parameter	Used in relation <sup>a</sup>	Remarks	Value	Ref. <sup>b</sup>	Units
$k_{OH}$	$\text{NO}_2 + \text{OH} \rightarrow \text{HNO}_3$	Daytime	$1.035 \times 10^{-11}$	(2)	$\text{cm}^3 \text{molec}^{-1} \text{s}^{-1}$
$k_{O_3}$	$\text{NO}_2 \rightarrow \text{nitrate}$	Nighttime	$5.56 \times 10^{-6}$	(1)	$\text{s}^{-1}$

<sup>a</sup>) All concentrations in  $\text{molec cm}^{-3}$ ; global radiation  $Q_r$  in  $\text{W m}^{-2}$

<sup>b</sup>) (1) Van Egmond and Kesseboom (1983); (2) Baulch *et al.* (1982)

The spatially variable  $\text{NO}_2/\text{NO}_x$  ratio is defined in terms of a stability dependent factor and a spatially variable one:

$$r_{n,eff}(x,s) = \bar{r}_n(x,s) f_{n\_space}. \quad (7.17)$$

Table 7.4 presents the data for  $\bar{r}_n(x,s)$  and  $f_n(x,s)$  for the different classes for both summer and winter seasons on the basis of five years of measurements.

Table 7.4 Statistical data on night time  $\text{NO}_2/\text{NO}_x$  ratios and relative occurrences of night time hours for the meteorological classes used in the OPS model. The data are derived from LML observations at rural stations over the 1980-1985 period.

	Period	Trajectory length (km)	Meteorological classes					
			U1	U2	N1	N2	S1	S2
NO <sub>2</sub> /NO <sub>x</sub> ratio: $\bar{r}_n(x,s)$	Summer	10	0.78	0.78	0.78	0.78	0.78	0.78
		100	0.78	0.78	0.78	0.78	0.78	0.78
		300	0.78	0.78	0.78	0.78	0.78	0.78
		1000	0.78	0.78	0.78	0.78	0.78	0.78
	Winter	10	0.47	0.47	0.62	0.69	0.39	0.58
		100	0.47	0.47	0.62	0.69	0.39	0.58
		300	0.47	0.47	0.62	0.69	0.39	0.58
		1000	0.47	0.47	0.62	0.69	0.39	0.58
Relative frequency of nighttime hours: $f_n(x,s)$	Summer	10	0	0	0.61	0.61	1.00	0.98
		100	0.17	0.17	0.68	0.68	0.63	0.83
		300	0.43	0.43	0.44	0.44	0.42	0.44
		1000	0.43	0.43	0.44	0.44	0.42	0.44
	Winter	10	0	0	0.66	0.66	1.00	0.99
		100	0.25	0.25	0.71	0.71	0.77	0.92
		300	0.62	0.64	0.74	0.63	0.64	0.63
		1000	0.62	0.74	0.74	0.63	0.64	0.63

It can be concluded from Table 7.4 that it is more important to include seasonal variations in the parameterisations than variations in stability and/or mixing height.

In the (former) TREND model, expression (7.16) was more elaborated in the relation with  $O_3$  (background) concentrations, while variations in  $O_3$ ,  $\bar{r}_n$  and  $f_n$  data were derived from measurements at the Cabauw meteorological tower (Van Jaarsveld, 1995). This approach is not followed in the OPS model, because it did not prove to improve the results very much.

The parameter  $\bar{r}_n$  provides diurnal and seasonal variations in  $NO_2/NO_x$  ratios to some extent. In the OPS model, also a spatial variation is introduced. This spatial variation is derived from a map of annual mean (background)  $NO_2$  concentrations in combination with an empirical relation between  $NO_2$  and  $NO_x$  concentrations (see Eq. 7.25). The spatial variation factor,  $f_{n\_space}$ , is calculated as:

$$f_{n\_space} = \frac{[NO_2]_{bg}}{0.65[NO_x]_{bg}} = \frac{[NO_2]_{bg}}{0.65 \exp\left(\frac{[NO_2]_{bg} + 12.4}{8.6}\right)}, \quad (7.18)$$

with  $[NO_2]_{bg}$  in ppb. The value 0.65 represents the average  $NO_2/NO_x$  ratio for the Netherlands, so  $f_{n\_space}$  has unity value when averaged over the Netherlands. Equation (7.18) is applicable to annual mean  $[NO_2]_{bg}$  values greater than 10 ppb, a value exceeded for almost all areas in the Netherlands;  $f_{n\_space}$  has a range of 0.50 (urban areas) up to 1.2 (coastal area of Friesland).

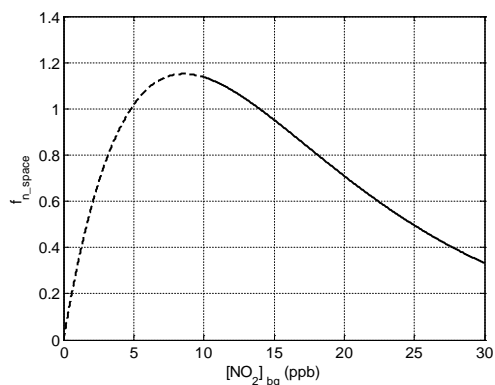


Figure 7.2:  $f_{n\_space}$  as a function of background  $NO_2$  concentration.

The yearly average conversion rates obtained are  $4.4 \times 10^{-6} \text{ s}^{-1}$  for the  $NO_2 \rightarrow HNO_3$  reaction and  $6.9 \times 10^{-6} \text{ s}^{-1}$  for the  $NO_2 \rightarrow NO_3^-$  reaction. From a model intercomparison (Derwent *et al.*, 1989), it appears that these values are more than a factor of 2-3 lower than the values used in the Harwell (Derwent and Nodop, 1986) and the EMEP (Lagrangian) models. These models also use prescribed  $O_3$  and OH concentrations and are confronted with the effects on the chemistry of non-instantaneous mixing. This could be one of the reasons why these models strongly underestimate  $NO_x$  concentrations, while  $HNO_3$  and  $NO_3^-$  concentrations are in reasonable agreement with the measurements.

The nitric acid produced is in equilibrium with particulate nitrate through reaction (7.14). Because of the very different dry deposition properties of  $HNO_3$  and  $NO_3^-$  it is necessary to make the ratio between the two as realistic as possible, but the set-up of the present model does not allow the explicit description of equilibrium reactions.

In the OPS model, the ratio  $f_{HNO_3}$  between the (gaseous)  $HNO_3$  and the total secondary compound,  $NO_3t$  ( $= HNO_3 + NO_3^-$ ), is modelled solely as a function of the  $NH_3$  concentration in the area according to:

$$f_{HNO_3} = \frac{[HNO_3]}{([HNO_3] + [NO_3^-])} = 0.024 \left( \frac{[NH_3]_{bg}}{1000} \right)^{-0.44} \quad (7.19)$$



in which  $[\text{NH}_3]_{bg}$  is the local (prescribed) background concentration of  $\text{NH}_3$  in ppb (see section 7.3 for method and values).

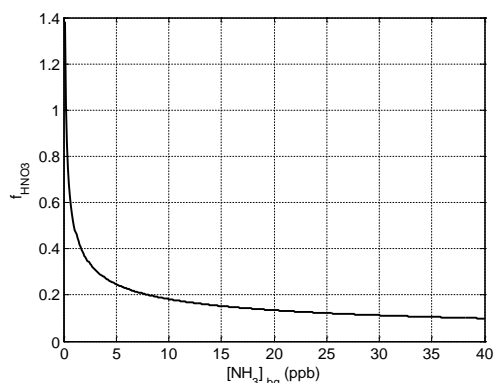


Figure 7.3:  $f_{\text{HNO}_3}$  as function of  $\text{NH}_3$  concentration.

The formulation of  $f_{\text{HNO}_3}$  is determined by a best fit to  $\text{NH}_3$  and  $\text{HNO}_3$  concentration results of a 1D chemistry model applied for the typical Dutch pollution climate for a period of several months. Because of the relatively high  $\text{NH}_3$  concentrations in the Netherlands, we can expect higher nitrate aerosol concentrations than elsewhere in Europe. This is what actually is seen in the EMEP network (Hjellbrekke, 1999).


The factor  $(1 - f_{\text{HNO}_3})$  is used to produce model output of  $\text{NO}_3^-$  aerosol.

### 7.2.3 Ammonia compounds

Ammonia is predominantly released from low-level agricultural sources. Under European conditions, a major part of the gaseous  $\text{NH}_3$  will react with  $\text{H}_2\text{SO}_4$  to yield an  $\text{NH}_4^+$ -containing aerosol (reactions 7.5 and 7.6).



and



These are one-way reactions and the aerosol will not evaporate again (Asman and Janssen, 1987). A part will react with gaseous  $\text{HNO}_3$  through reaction:



and a similar equilibrium reaction with  $\text{HCl}$  will form  $\text{NH}_4\text{Cl}$  (Pio and Harrison, 1987):



For Europe as a whole, enough acid precursors are released to neutralise (in due time) all emitted  $\text{NH}_3$ . On a local scale, however, or during intensive spreading of manure, not enough acid may be present to convert all  $\text{NH}_3$ . Therefore, conversion rates are likely to vary both in space and time. In previous versions of the OPS model, a constant rate of  $8 \times 10^{-5} \text{ s}^{-1}$  ( $28.8 \% \text{ h}^{-1}$ ) was adopted because not enough information was available to make it a function of the season or other factors (Asman and Van Jaarsveld, 1992). This value was consistent with values derived from measurements (Erisman *et al.*, 1988) and,

when used in transport models, these values resulted in fair agreement with observed ammonium levels<sup>2</sup> (Asman and Janssen, 1987). Atmospheric concentration levels of sulphur dioxide have decreased since 1980 by at least a factor of 5, while  $\text{NH}_3$  concentrations have remained at roughly the same level. The assumption of a fixed conversion rate is therefore no longer justified.

### 7.2.3.1 Implementation of $\text{NH}_x$ chemistry in the model

Since  $\text{SO}_2$  and  $\text{NO}_2$  are the primary pollutants for  $\text{H}_2\text{SO}_4$  and  $\text{HNO}_3$ , respectively, we would like to parameterise the conversion rate of  $\text{NH}_3 \rightarrow \text{NH}_4^+$  as function of these concentrations. The formation of ammonium is therefore simulated using a one-dimensional model, including the relevant chemical reactions as applied in the MPA model (De Leeuw *et al.*, 1990) and also deposition processes. This model is used on the basis of actual meteorological data and supplied with background concentrations of  $\text{SO}_2$ ,  $\text{NO}_x$ ,  $\text{NH}_3$ ,  $\text{O}_3$  and OH radicals. The conversion rate follows from the production of ammonium sulphate and ammonium nitrate over a (long) period, divided by the mean ammonia concentration. The conversion rates are then translated into a parameterisation for this rate using regression analysis. This resulted in the following relation for the  $\text{NH}_3 \rightarrow \text{NH}_4$  conversion rate  $k_{\text{NH}_3}$  [%  $\text{h}^{-1}$ ]:

$$k_{\text{NH}_3} = \max(1, 0.8 + 2.4 C_1 + 18.9 C_2 + 5.4 (C_2)^4 - 0.51 (C_2)^6), \quad (7.24)$$

where  $C_1$  is the ratio of background concentrations  $[\text{NO}_2]/[\text{NH}_3]$  (ppb/ppb) and  $C_2 = \min([\text{SO}_2]/[\text{NH}_3], 3)$  (ppb/ppb).

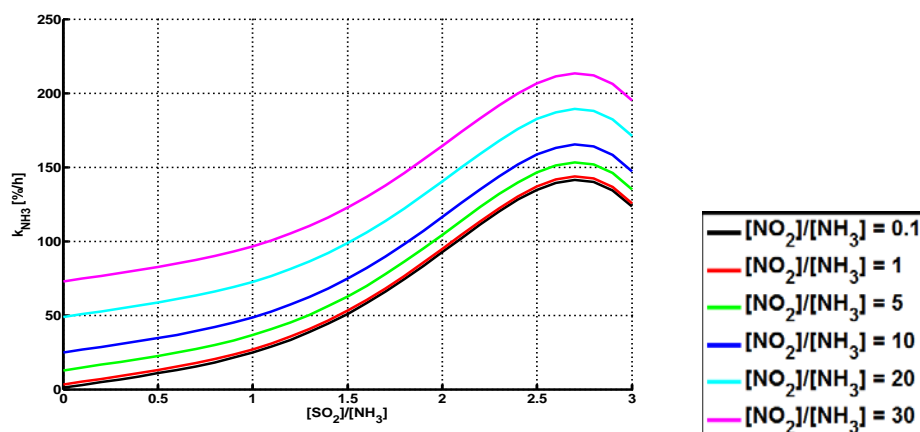


Figure 7.4:  $k_{\text{NH}_3}$  [%  $\text{h}^{-1}$ ] as function of  $C_2 = [\text{SO}_2]/[\text{NH}_3]$ , for different values of  $C_1 = [\text{NO}_2]/[\text{NH}_3]$ . Note that 200% per hour should be interpreted as 100% per half an hour.

<sup>2</sup> These ammonium measurements were not corrected for blank filter values.

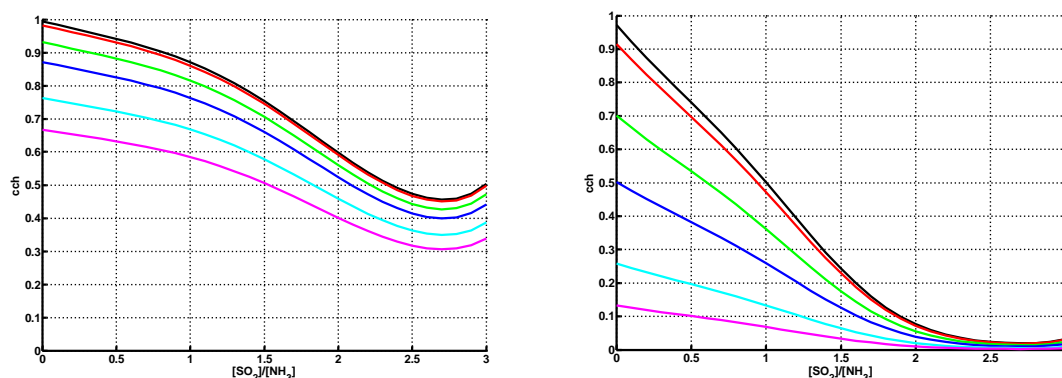


Figure 7.5: Source depletion factor  $cch$  [-] for chemical conversion of  $NH_3$ .  $cch$  is given as function of  $C_2 = [SO_2]/[NH_3]$ , for different values of  $C_1 = [NO_2]/[NH_3]$ . Wind speed = 5 m/s, distance from source = 10 km (left panel) or 50 km (right panel). Colors the same as in previous figure.

When averaged over the Netherlands,  $k_{NH_3}$  amounts to approx.  $16\% \text{ h}^{-1}$  ( $4.4 \times 10^{-5} \text{ s}^{-1}$ ) in 1980 and approx.  $5\% \text{ h}^{-1}$  ( $1.4 \times 10^{-5} \text{ s}^{-1}$ ) in 1997.

### 7.3 Prescribed concentration levels (background concentrations)

The OPS model cannot take changes in atmospheric composition due to chemical reactions or deposition processes directly into account. However, if one can quantify the effect of changing precursor levels on the (bulk) reactions and translate this into simple functions of the absolute precursor levels, then such functions can be used in models as OPS. The model then needs maps of precursor concentrations with sufficient spatial and temporal detail. One way to derive such simplified functions is to use a (complex) non-linear model to describe time series of concentration levels of the relevant compounds for a longer period and then fit a mathematical function to relevant model outputs.

For the modelling of transport and deposition of acidifying compounds, (existing) levels of  $SO_2$ ,  $NO_2$  and  $NH_3$  have been found to be of great importance because of the chemical interactions. The most important is probably the role of  $NH_3$  in the reaction of sulphuric acid to ammonia sulphates and nitric acid to ammonia nitrates. As such, the  $NH_3$  is consumed, depending indirectly on levels of  $SO_2$  and  $NO_2$ . A similar interrelation exists for the formation of secondary aerosols. If one considers the dramatic decrease of especially  $SO_2$  in the past decades (see Figure 7.8), then it is important to include these background concentrations as input data to the OPS model.

A summary of where background concentrations are used in the model is given in the following table. Note that also non-chemical processes make use of the background concentrations.

Table 7. 5: Summary of use of background concentrations in the OPS model

background concentrations	ratio	process
$SO_2, NH_3$	$SO_2/NH_3$	$NH_3 \rightarrow NH_4$ conversion
$NO_x, NH_3$	$NO_2/NH_3$	$NH_3 \rightarrow NH_4$ conversion
$NO_x$	$NO_2/NO_x$	$NO_2 \rightarrow HNO_3$ conversion
$SO_2, NH_3$	N/S	in-cloud scavenging ratio $SO_2$
$NO_x$	$NO_2/NO_x$	in-cloud scavenging ratio $NO_x$
$NH_3$	$HNO_3/NO_3\text{-total}$	canopy resistance $R_c(NO_3\text{-total})$
$NO_x$	$NO_2/NO_x$	canopy resistance $R_c(NO_x)$

NH <sub>3</sub>		compensation point NH <sub>3</sub>
-----------------	--	------------------------------------

Background concentrations of SO<sub>2</sub>, NO<sub>x</sub> and NH<sub>3</sub> are included as gridded maps in the OPS model. These maps encompass a large part of Western Europe and have a spatial resolution of 1 x 1 km<sup>2</sup> for the Netherlands and 5 x 5 km<sup>2</sup> for the foreign countries. Maps of existing concentration levels are preferably based on measurements; however, current networks are not dense enough to produce maps with sufficient detail. The method selected here is to use the OPS model in an iterative procedure, calibrating the model results with available measurements. Each iteration, OPS uses updated background concentrations of all three components; in this way, non-linearities are approximated in a stepwise linear way. The creation of background maps consists of three steps, of which step 1 and 2 are performed within this iterative procedure; the iteration stops if the grid averaged concentration differs less than 0.5%.

### 1. Computation

Concentration maps are calculated with the OPS model for the sample years 1984, 1994, 2005, 2012 and the future year 2020, using detailed emission data.

### 2. Calibration

Modelled concentrations (computed with a separate OPS-computation at receptor points) are compared with observations of the LML network and the maps are multiplied by the average ratio observed/modelled for each of the sample years.

### 3. Interpolation in time

For each year (starting in 1980), trend factors relative to the sample years are determined from the observations. The concentration map for a specific year is then calculated by scaling one of the sample year maps with this trend factor. The trend factor for the map of the future year is equal to 1 by definition.

Table 7.6 Representative period for each sample year for background maps

sample year	representative for period
1984	< 1990
1994	1990-2000
2005	2001-2006
2012	2007-X <sup>(1)</sup>
2020	(X+1)-2020

<sup>(1)</sup> X is halfway the year for which the calculation is performed and 2020

The background concentration of NO<sub>2</sub> is derived from the background NO<sub>x</sub> concentration using a simple empirical relation derived from LML observations. This relation is:

$$[\text{NO}_2] = \beta_1 \ln([\text{NO}_x]) + \beta_2, \quad (7.25)$$

with [] concentrations in ppbv and empirical parameters  $\beta_1 = 8.6$ ,  $\beta_2 = -12.4$ . This relation has been derived from 1993 LML-measurements. Since this function drops below zero for low values of [NO<sub>x</sub>], a linear function is used for  $[\text{NO}_x] \leq \exp(1 - \frac{\beta_2}{\beta_1})$ , that touches the ln-function at  $\exp(1 - \frac{\beta_2}{\beta_1})$  and is zero for [NO<sub>x</sub>] = 0 ppbv.

This conversion function typically explains more than 90% of the variation in yearly averaged measured NO<sub>2</sub> concentrations.

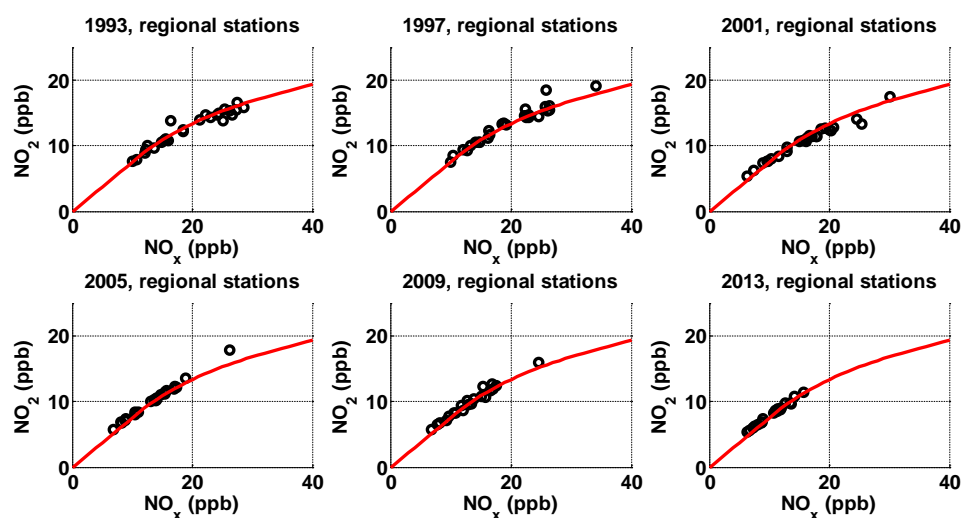


Figure 7.6: Yearly averaged  $\text{NO}_2$ - vs.  $\text{NO}_x$ -concentration for regional LML-stations. In red the  $\text{NO}_x \rightarrow \text{NO}_2$ -conversion function.

The calibrated maps of the background concentrations of  $\text{SO}_2$ ,  $\text{NO}_x$  and  $\text{NH}_3$  for the year 2005 are given in Figure 7.7.

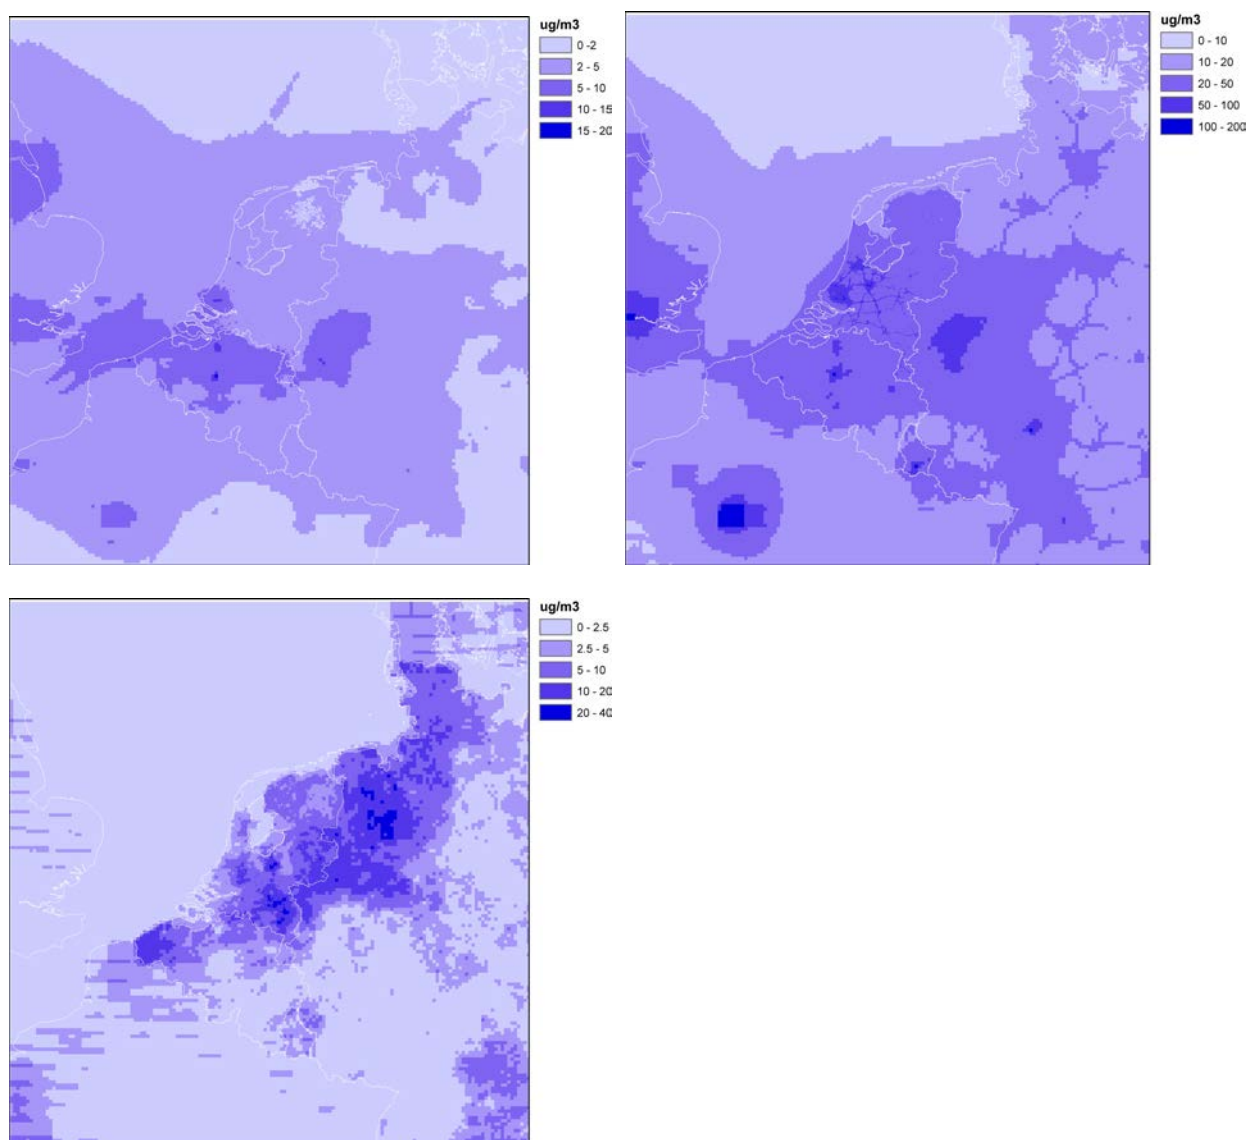


Figure 7.7 background concentration maps for 2005; Left upper panel:  $\text{SO}_2$ , right upper:  $\text{NO}_x$ , bottom:  $\text{NH}_3$ .

The calibration factors that are currently in use are summarised in Table 7.7; the calibration factor for the future year is taken equal to the calibration factor for 2012.

Table 7.7 Calibration factors applied to the calculated concentration maps

	Map 1984	Map 1994	Map 2005	Map 2012
$\text{SO}_2$	1.04	0.96	0.69	0.72
$\text{NO}_x$	0.93	0.94	0.77	0.94
$\text{NH}_3$	0.83	0.83	0.94	1.12

The yearly mean concentrations, used in the calculation of the trend factors, are presented in Figure 7.8.

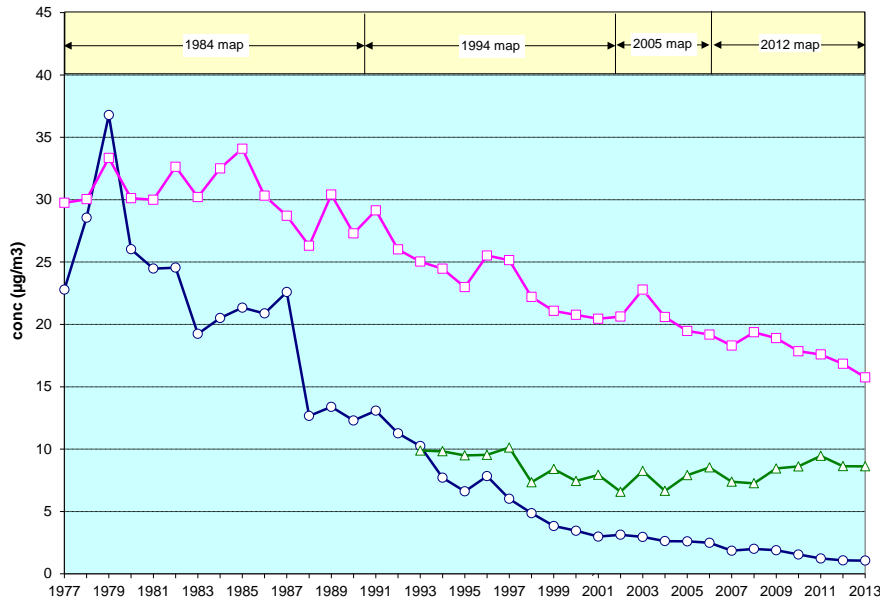


Figure 7.8 Average annual concentrations ( $\mu\text{g}/\text{m}^3$ ) of  $\text{SO}_2$ ,  $\text{NO}_2$  and  $\text{NH}_3$ , derived from measurements at the regional stations of the LML network.

## 7.4 Secondary species in OPS

The production and deposition of secondary substances is the only process that is not treated analytically in OPS. This means that a numerical time stepping procedure is used in order to estimate the depleted source strength  $\tilde{Q}_{\text{sec,num}}$  [g/s] of secondary substances. The time step in this procedure depends on the distance between the source and receptor and (for area sources) on the amount of decayed primary substance. The processes inside one time step are:

- loss of primary substance due to dry deposition, wet deposition and chemical conversion
- production of secondary substance due to chemical conversion of the primary substance
- loss of secondary substance due to dry deposition and wet deposition.

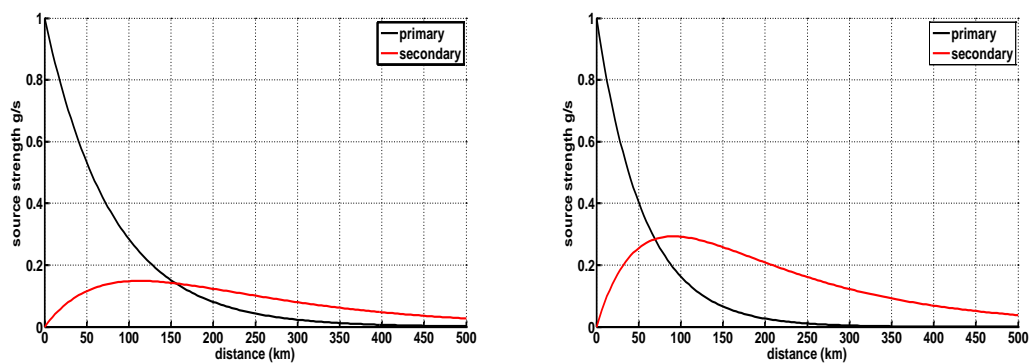


Figure 7.9 Examples of depleted source strength of primary (black) and secondary (red) substance as function of downwind distance, calculated in the numerical time stepping procedure. Left panel: chemical conversion rate 4 %/h, right panel: 10 %/h. Mixing height 800 m, wind speed: 3 m/s, initial primary source strength = 1 g/s, deposition velocity 0.8 cm/s (primary) and 0.1 cm/s (secondary). Wet deposition rates 6 %/h (primary and secondary).

The time stepping procedure takes place inside a sector with constant mixing height and with a constant transport velocity. To correct the source strength for this simplification, a correction is computed, based on the ratio between the analytically determined depleted source strength of the primary substance  $\tilde{Q}_{pri}$  and those of the numerical procedure  $\tilde{Q}_{pri,num}$  :

$$\tilde{Q}_{sec} = \tilde{Q}_{sec,num} \frac{\tilde{Q}_{pri}}{\tilde{Q}_{pri,num}}. \quad (7.26)$$

Concentrations of the secondary substance are computed according to Eq. 3.7, in combination with 3.8 and 3.9 or 3.15.

## 7.5 References

- Asman W.A.H. and Janssen A.J. (1987) A long-range transport model for ammonia and ammonium for Europe. *Atmospheric Environment* **21**, 2099-2119.
- Asman W.A.H. and Jaarsveld J.A. van (1992) A variable-resolution transport model applied for  $\text{NH}_x$  in Europe. *Atmospheric Environment* **26A**, 445-464.
- Baulch D.L., Cox, R.A. Crutzen P.J., Hampson R.F. Jr., Kerr, F.A. Troe, J. and Watson R.P. (1982) Evaluated kinetic and photochemical data for atmospheric chemistry: *J. Phys. Chem. Ref. Data* **11** (Suppl. 1), 327-496.
- Behra P., Sigg L. and Stumm W. (1989) Dominating influence of  $\text{NH}_3$  on the oxidation of aqueous  $\text{SO}_2$ : The coupling of  $\text{NH}_3$  and  $\text{SO}_2$  in atmospheric water. *Atmospheric Environment* **23**, 2691-2707.
- Calvert J.G., Su F., Bottenheim J.W. and Strausz O.P. (1978) Mechanism of the homogeneous oxidation of sulfur dioxide in the troposphere. *Atmospheric Environment* **12**, 197-226.
- Cox R.A. and Jenkin M.E. (1987) Kinetics of the formation of nitrous acid from the thermal reaction of nitrogen dioxide and water vapour. In: *Physico-Chemical Behaviour of Atmospheric Pollutants: Proceedings of the 4th European Symposium*; Stresa, Italy. D. Reidel, Dordrecht, the Netherlands.
- De Leeuw F.A.A.M., Kesseboom H. and Egmond N.D. van (1985) Numerieke verspreidingsmodellen voor de interpretatie van de meetresultaten van het Nationaal Meetnet voor Luchtverontreiniging; ontwikkeling 1982-1985. RIVM, Bilthoven, the Netherlands. Report no. 842017002.
- De Leeuw F.A.A.M., Rheineck Leyssius H.J. van and Bultjes P.J.H. (1990) Calculation of long term averaged ground level ozone concentrations. *Atmospheric Environment* **24A**, 185-193.
- Derwent R.G. and Nodop K. (1986) Long-range transport deposition of acidic nitrogen species in north-west Europe. *Nature* **324**, 356-358.
- Derwent R.G., Hov Ø., Asman W.A.H., Jaarsveld J.A. van and Leeuw F.A.A.M. de (1989) An intercomparison of long-term atmospheric transport models; the budgets of acidifying species for the Netherlands. *Atmospheric Environment* **23**, 1893-1909.
- Erisman J.W., Vermetten A.W.M., Asman W.A.H., Waijers-Ijpelaar A. and Slanina J. (1988) Vertical distribution of gases and aerosols: The vertical behaviour of ammonia and related components in the lower atmosphere. *Atmospheric Environment* **22**, 1153-1160.
- Haury G., Jordan S. and Hofmann C. (1978) Experimental investigation of the aerosol-catalyzed oxidation of  $\text{SO}_2$  under atmospheric conditions. *Atmospheric Environment* **12**, 281-287.
- Heikes B.G. and Thompson A.M. (1983) Effects of heterogeneous processes on  $\text{NO}_3$ , HONO and  $\text{HNO}_3$  chemistry in the troposphere. *J. Geophys. Res.* **88**, 10883-10895.
- Hewitt C.N. and Harrison R.M. (1985) Tropospheric concentrations of the hydroxyl radical - A review. *Atmospheric Environment* **19**, 545-554.
- Hjellbrekke A.G. (1999) Data Report 1997; Part 1: Annual summaries. EMEP/CCC-Report 3/99, Norwegian Institute for Air Research, Kjeller, Norway.
- Hov Ø., Eliassen A. and Simpson D. (1988) Calculation of distribution of  $\text{NO}_x$  compounds in Europe. In: Isaksen I.S.A., editor. *Tropospheric Ozone*. D. Reidel, Dordrecht, the Netherlands. p. 239-261.
- Hübner G., Perner D., Platt U., Tönnissen A. and Ehhalt D.H. (1984) Groundlevel OH radical concentration: New measurements by optical absorption. *J. Geophys. Res.* **89**, 1309-1320.



- Iversen T., Halvorsen N.E., Mylona S. and Sandnes H. (1991) Calculated budgets for airborne acidifying components in Europe; 1985,1987,1988,1989 and 1990. The Norwegian Meteorological Institute, Oslo, Norway. EMEP/MSC-W Report 1/91.
- Kessler C. and Platt U. (1984) Nitrous acid in polluted air masses: sources and formation pathways. In: Versino, B. and Angeletti, editors. Physico-Chemical Behaviour of Atmospheric Pollutants. Proceedings of the European symposium; Varese, Italy. D. Reidel, Dordrecht, the Netherlands.
- Kitto A.M.N. and Harrison R.M. (1992) Nitrous and nitric acid measurements at sites in south-east England. *Atmospheric Environment* **26A**, 235-241.
- Lamb D. Miller D.F., Robinson N.F. and Gertler A.W. (1987) The importance of liquid water concentration in the atmospheric oxidation of SO<sub>2</sub>. *Atmospheric Environment* **21**, 2333-2344.
- Lammel G., Perner D. and Warneck P. (1989) Nitrous acid at Mainz: observation and implication for its formation mechanism. In: Restelli G. and Angeletti G., editors. Physico-Chemical Behaviour of Atmospheric Pollutants: Proceedings of the 5th European symposium; Varese, Italy. D. Reidel, Dordrecht, the Netherlands.
- Liberti A. Brocco D. and Possanzini M. (1978) Absorption and oxidation of sulfur dioxide on particles. *Atmospheric Environment* **12**, 255-261
- Magnotta F. and Johnston H.S. (1980) Photodissociation quantum yields for the NO<sub>3</sub> free radical. *Geophys. Res. Lett.* **7**, 769-772.
- Möller D. (1980) Kinetic model of atmospheric SO<sub>2</sub> oxidation based on published data. *Atmospheric Environment* **14**, 1067-1076.
- Ogilvie F.R. (1982) Buitenluchtverontreiniging in Delft in 1980. TNO, Delft, the Netherlands. Report G 980.
- Perner D., Platt U., Trainer M., Hübler G., Drummond J., Junkermann W., Rudolph J., Schubert B. and Ehhalt D.H. (1987) Measurements of tropospheric OH concentrations: A comparison of field data with model predictions. *J. Atmos. Chem.* **5**, 185-216.
- Pio C.A. and Harrison R.M. (1987) The equilibrium of ammonium chloride aerosol with gaseous hydrochloric acid and ammonia under tropospheric conditions. *Atmospheric Environment* **21**, 1243-1246.
- Slanina J., Keuken M.P., Arends B., Veltkamp A.C. and Wyers G.P. (1990) Acidification research at ECN. Contribution to the Dutch Priority Programme on Acidification. ECN, Petten, the Netherlands.
- Stelson A.W., Friedlander S.K. and Seinfeld J.H. (1979) A note on the equilibrium relation ship between ammonia and nitric acid and particulate ammonium nitrate. *Atmospheric Environment* **13**, 369-371.
- Stelson A.W. and Seinfeld J.H. (1982a) Relative humidity and pH dependence of the vapor pressure of ammonium nitrate-nitric acid solutions at 25 °C. *Atmospheric Environment* **16**, 993-1000.
- Stelson A.W. and Seinfeld J.H. (1982b) Relative humidity and temperature dependence of ammonium nitrate dissociation constant. *Atmospheric Environment* **16**, 983-992.
- Stockwell W.R. and Calvert J.G. (1983) The mechanism of the HO-SO<sub>2</sub> reaction. *Atmospheric Environment* **17**, 2231-2235.
- Van Egmond N.D. and Kesseboom H. (1983) Mesoscale air pollution dispersion models-II. Lagrangian PUFF-model, and comparison with Eulerian GRID model. *Atmospheric Environment*, **17**, 265-274.
- Van Egmond N.D. and Kesseboom H. (1985) A numerical mesoscale model for long- term average NO<sub>x</sub> and NO<sub>2</sub>-concentration. *Atmospheric Environment* **19**, 587- 595.
- Van Jaarsveld J. A. (1995) Modelling the long-term atmospheric behaviour of pollutants on various spatial scales. Ph.D. Thesis, Utrecht University, the Netherlands.
- Van Jaarsveld, J.A., Bleeker, A. and Hoogervorst, N.J.P. (2000) Evaluatie ammoniakredukties met behulp van metingen en modelberekeningen. RIVM, Bilthoven, the Netherlands. Report no. 722108025.