


Data USB and UART bridge

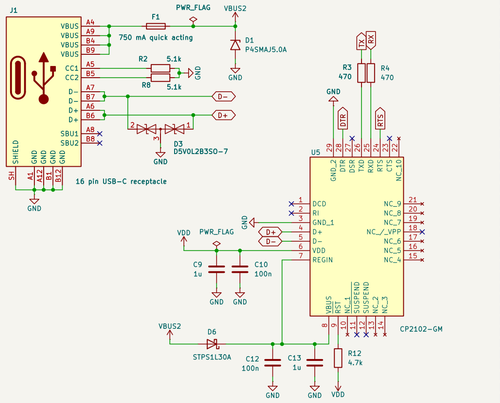


Reset and boot pin configuration

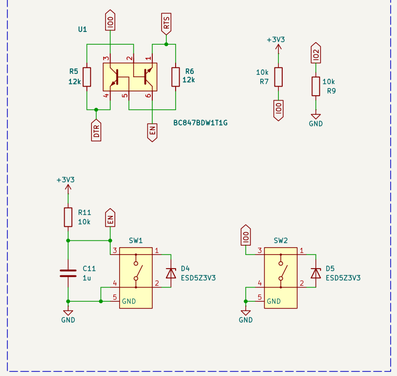


ESP32 module

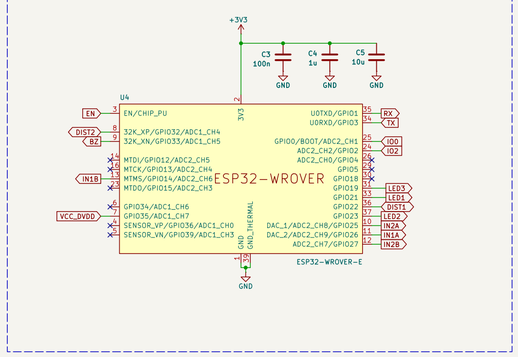


Buzzer




Blinkers

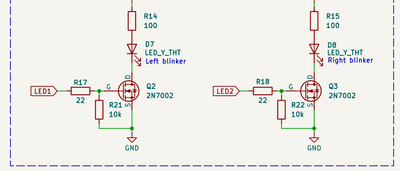


Low battery indicator




Power delivery USB and PD control

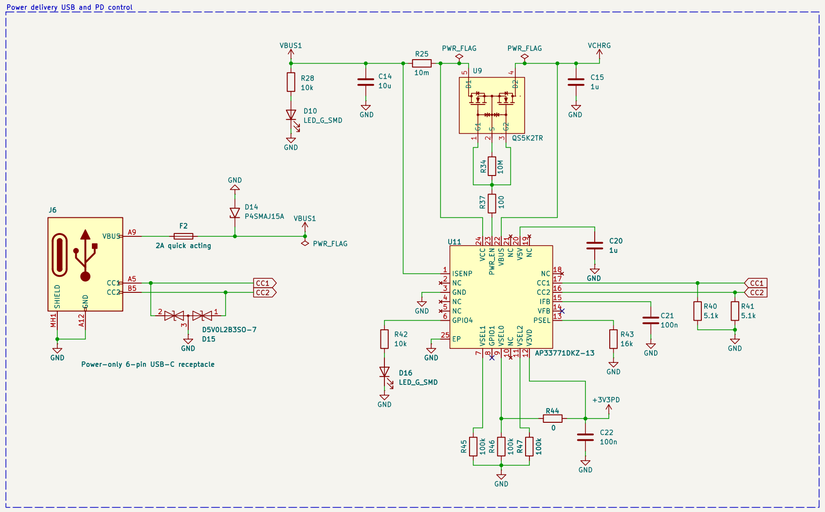


2S1P battery charger




Battery output enable

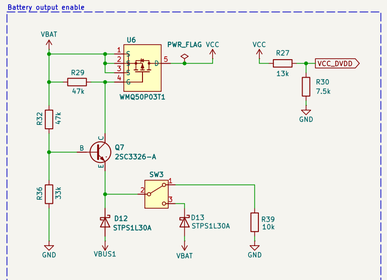


Voltage regulators

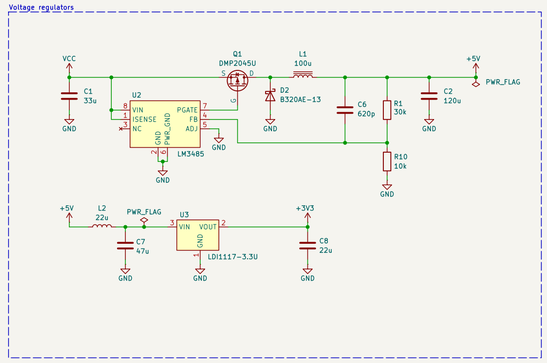


Battery

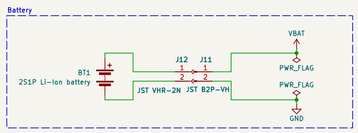


Motor control

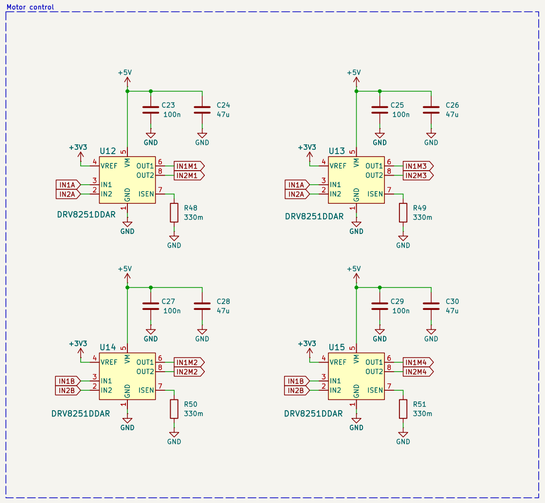


Motor units

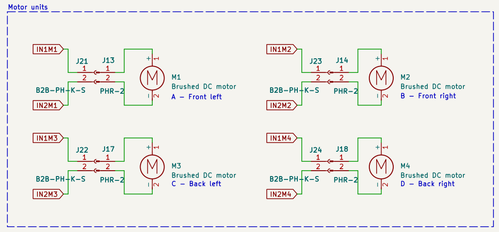

Distance sensors

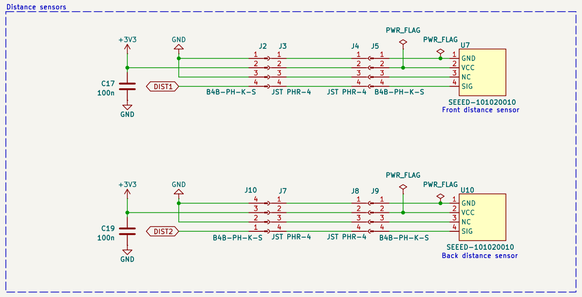

Test points

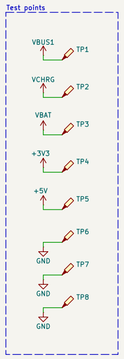

Mounting holes



Jakov Begović

Sheet: /
File: Robot-auto.kicad_sch

Title: Robot upravljan kontrolerom v2 – Robot auto

Size: User	Date: 2026-10-26	Rev: v1.0
KiCad E.D.A. 10.0.6		Id: 1/1