

## GM300-3 Gate Module

### Features

- Photocathode gate module
- 3 ns gate time (FWHM)
- 1 ns rise/fall time
- 300 KHz repetition rate
- Trigger input
- N version gated normally off
- P version gated normally on
- No drift at low repetition rate: PMT compatible



### Parameters

	Minimum	Maximum
Gate Time $T_g$	3 ns FWHM*	Unlimited (D.C.)
Repetition Rate	0 Hz "Single Shot"	300 KHz global, 2.5 MHz burst mode
ON Voltage Output	-200 V	
OFF Voltage Output	+50 V	
Trigger Input	+3.2 V into 50 $\Omega$	+5.5 V into 50 $\Omega$
Power Supply	+10 V	+14 V
Quiescent Current @ +12 V	180 mA (1 A inrush current)	
Jitter	30 ps r.m.s.	
Maximum Capacitance Load	250 pF	
Minimum Resistance Load	10 M $\Omega$	

\*Actual gate time is dependent on the detector. This gate time is the minimum that the GM300-3 can provide.

### Mechanical

	Housed	Bare PCB
Height	26 mm	13 mm
Width	56 mm	38 mm
Length	86 mm (106 mm including connectors)	80 mm (106 mm including connectors*)
Weight	115 g	45 g
Trigger Input Connector	SMA	
Power Supply Connector	SMB	
Gate Pulse Connector	SMA	

\* Right-angled connectors would reduce the total length to 100 mm and enable easier access. Available on request.

### Photek Limited


26 Castleham Road, St Leonards on Sea,  
East Sussex, TN38 9NS, United Kingdom.  
T +44 (0)1424 850555 F +44 (0)1424 850051  
E sales@photek.co.uk W www.Photek.co.uk

Datasheet No.	DS024
Issue	01
Date	12 March 2012



Typical Timing Parameters

Leading Edge Propagation Delay	$T_{d1}$	50 ns
Trailing Edge Propagation Delay	$T_{d2}$	40 ns
Trigger / Gate Offset Time $T_t - T_g$	$T_{d1} - T_{d2}$	10 ns
Minimum Gate Width in Inverted Mode	$T_g$	50 ns
Propagation Delay Temperature Co-efficient		40 ( $\pm 5$ ) ps / °C
Gate Width Temperature Co-efficient		$\pm 10$ ps / °C


GM300-3N

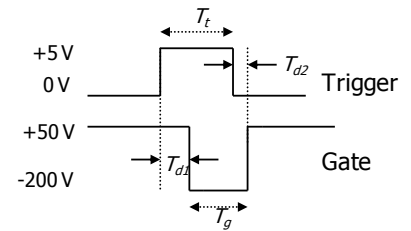





GM300-3P

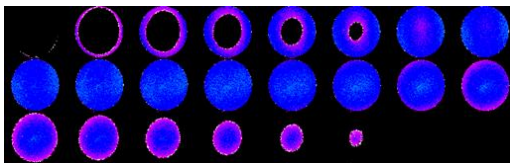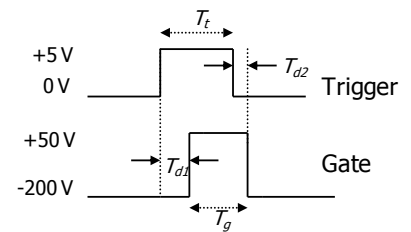

GM300-3N Laser Walkthrough  
200 ps/frame

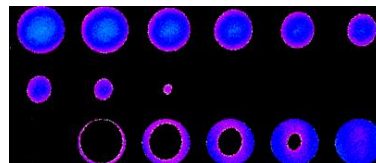

GM300-3P Laser Walkthrough  
200 ps/frame

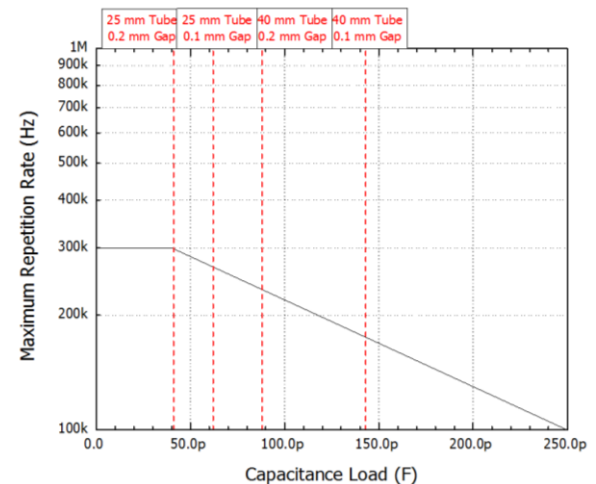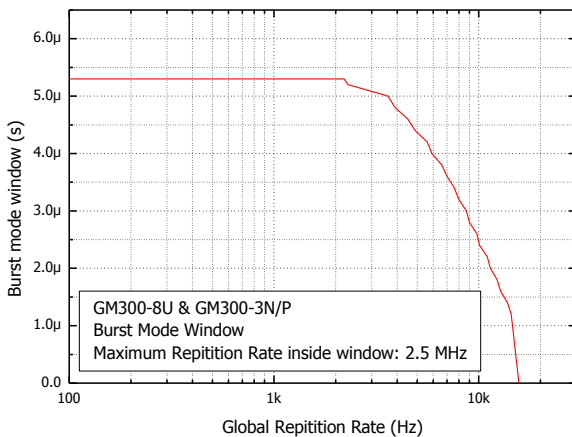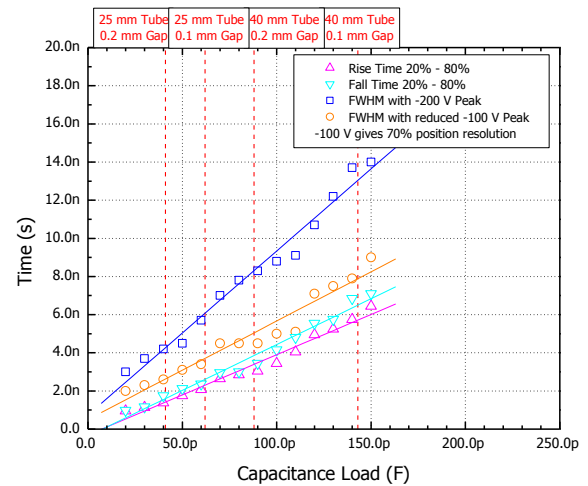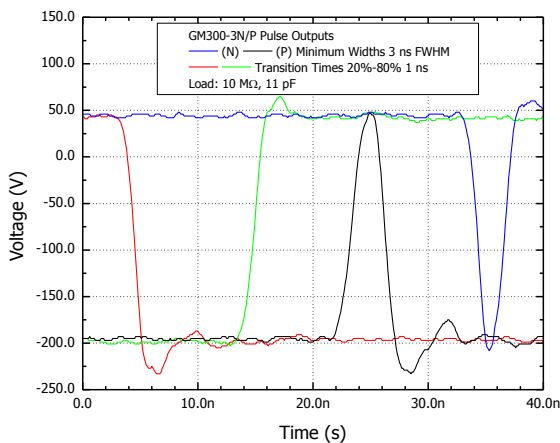

Photek Ltd reserves the right to update and improve this specification without prior notice

Photek Limited

26 Castleham Road, St Leonards on Sea,  
East Sussex, TN38 9NS, United Kingdom.  
T +44 (0)1424 850555 F +44 (0)1424 850051  
E sales@photek.co.uk W www.Photek.co.uk

Datasheet No.	DS024
Issue	01
Date	12 March 2012