


86.61mm

157.35mm

View from Bottom side (Scale 1:1)

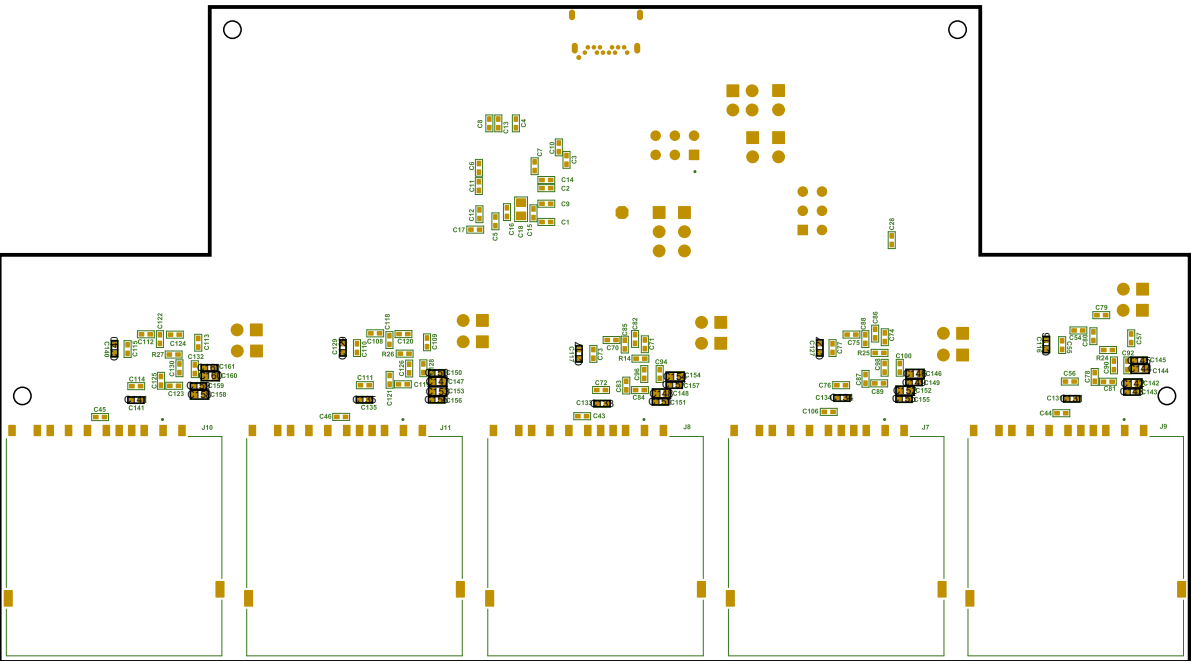

A

B

C


D

E

1

1

Top Layer (Scale 1:1)

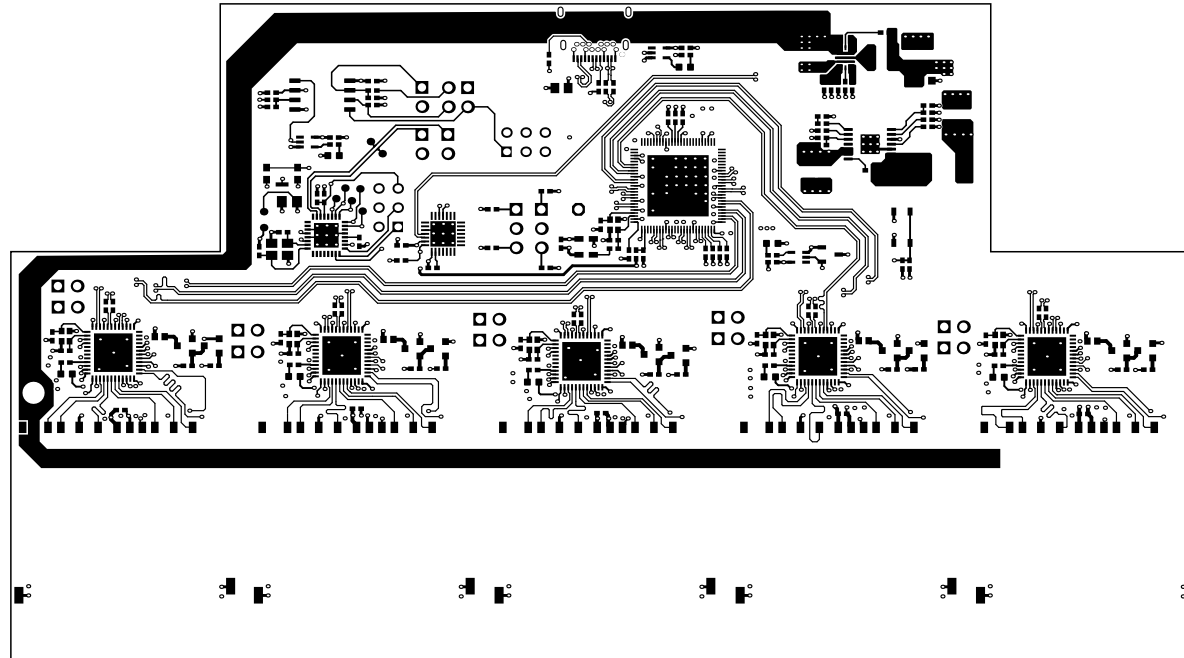

2

2

3

3

4

4

A

B

C

D

E

A

B

C

D

E

1

1

Int1_GND1 (Scale 1:1)

2


2

3

3

4

4

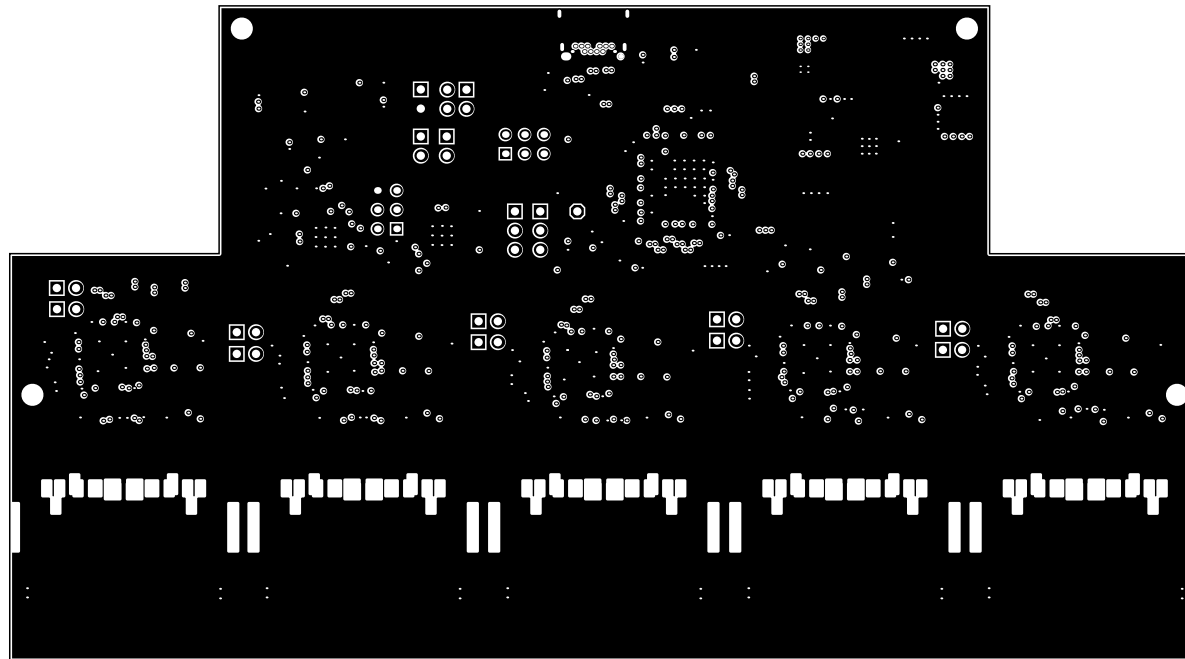

A

B

C

D

E

A

B

C

D

E


1

1

Int2 Sig1 (Scale 1:1)

2

2

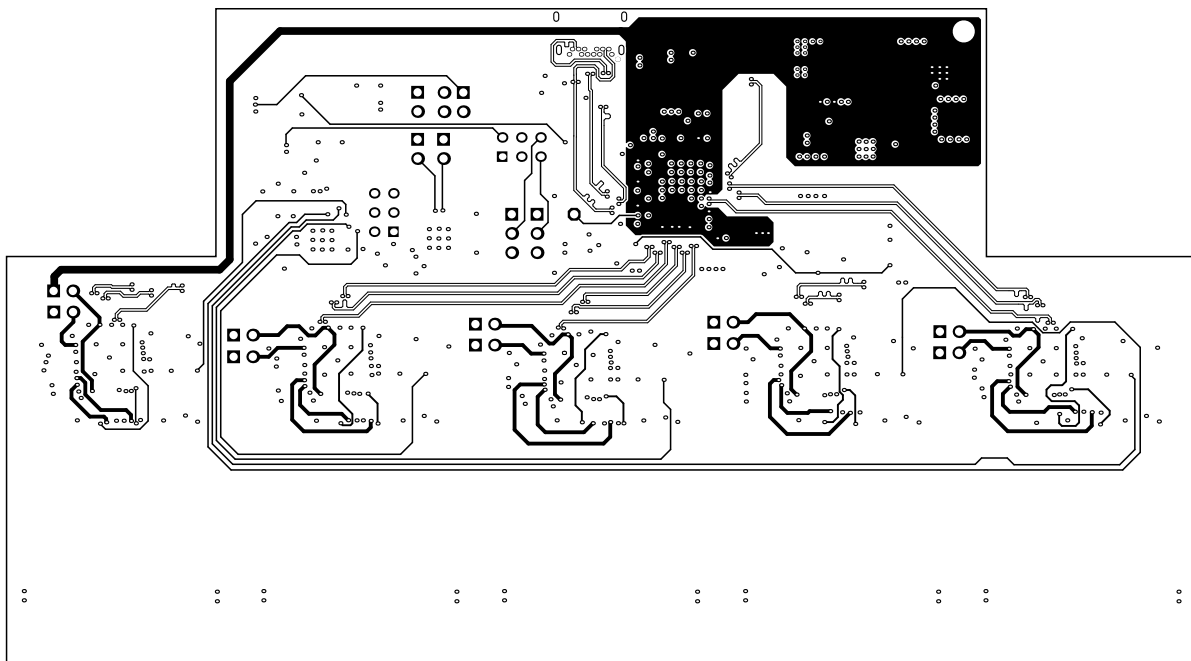

3

3

4

4

A

B

C

D

E

A

B

C

D

E

1

1

Int3_PWR1 (Scale 1:1)

2


2


3

3

4

4

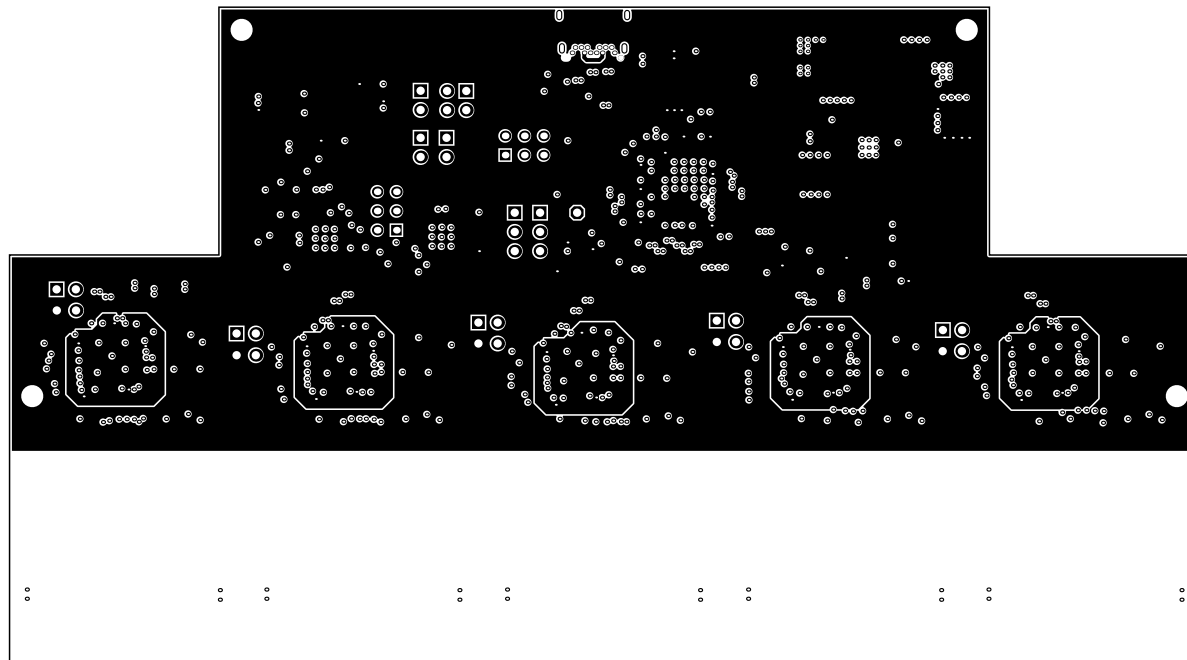

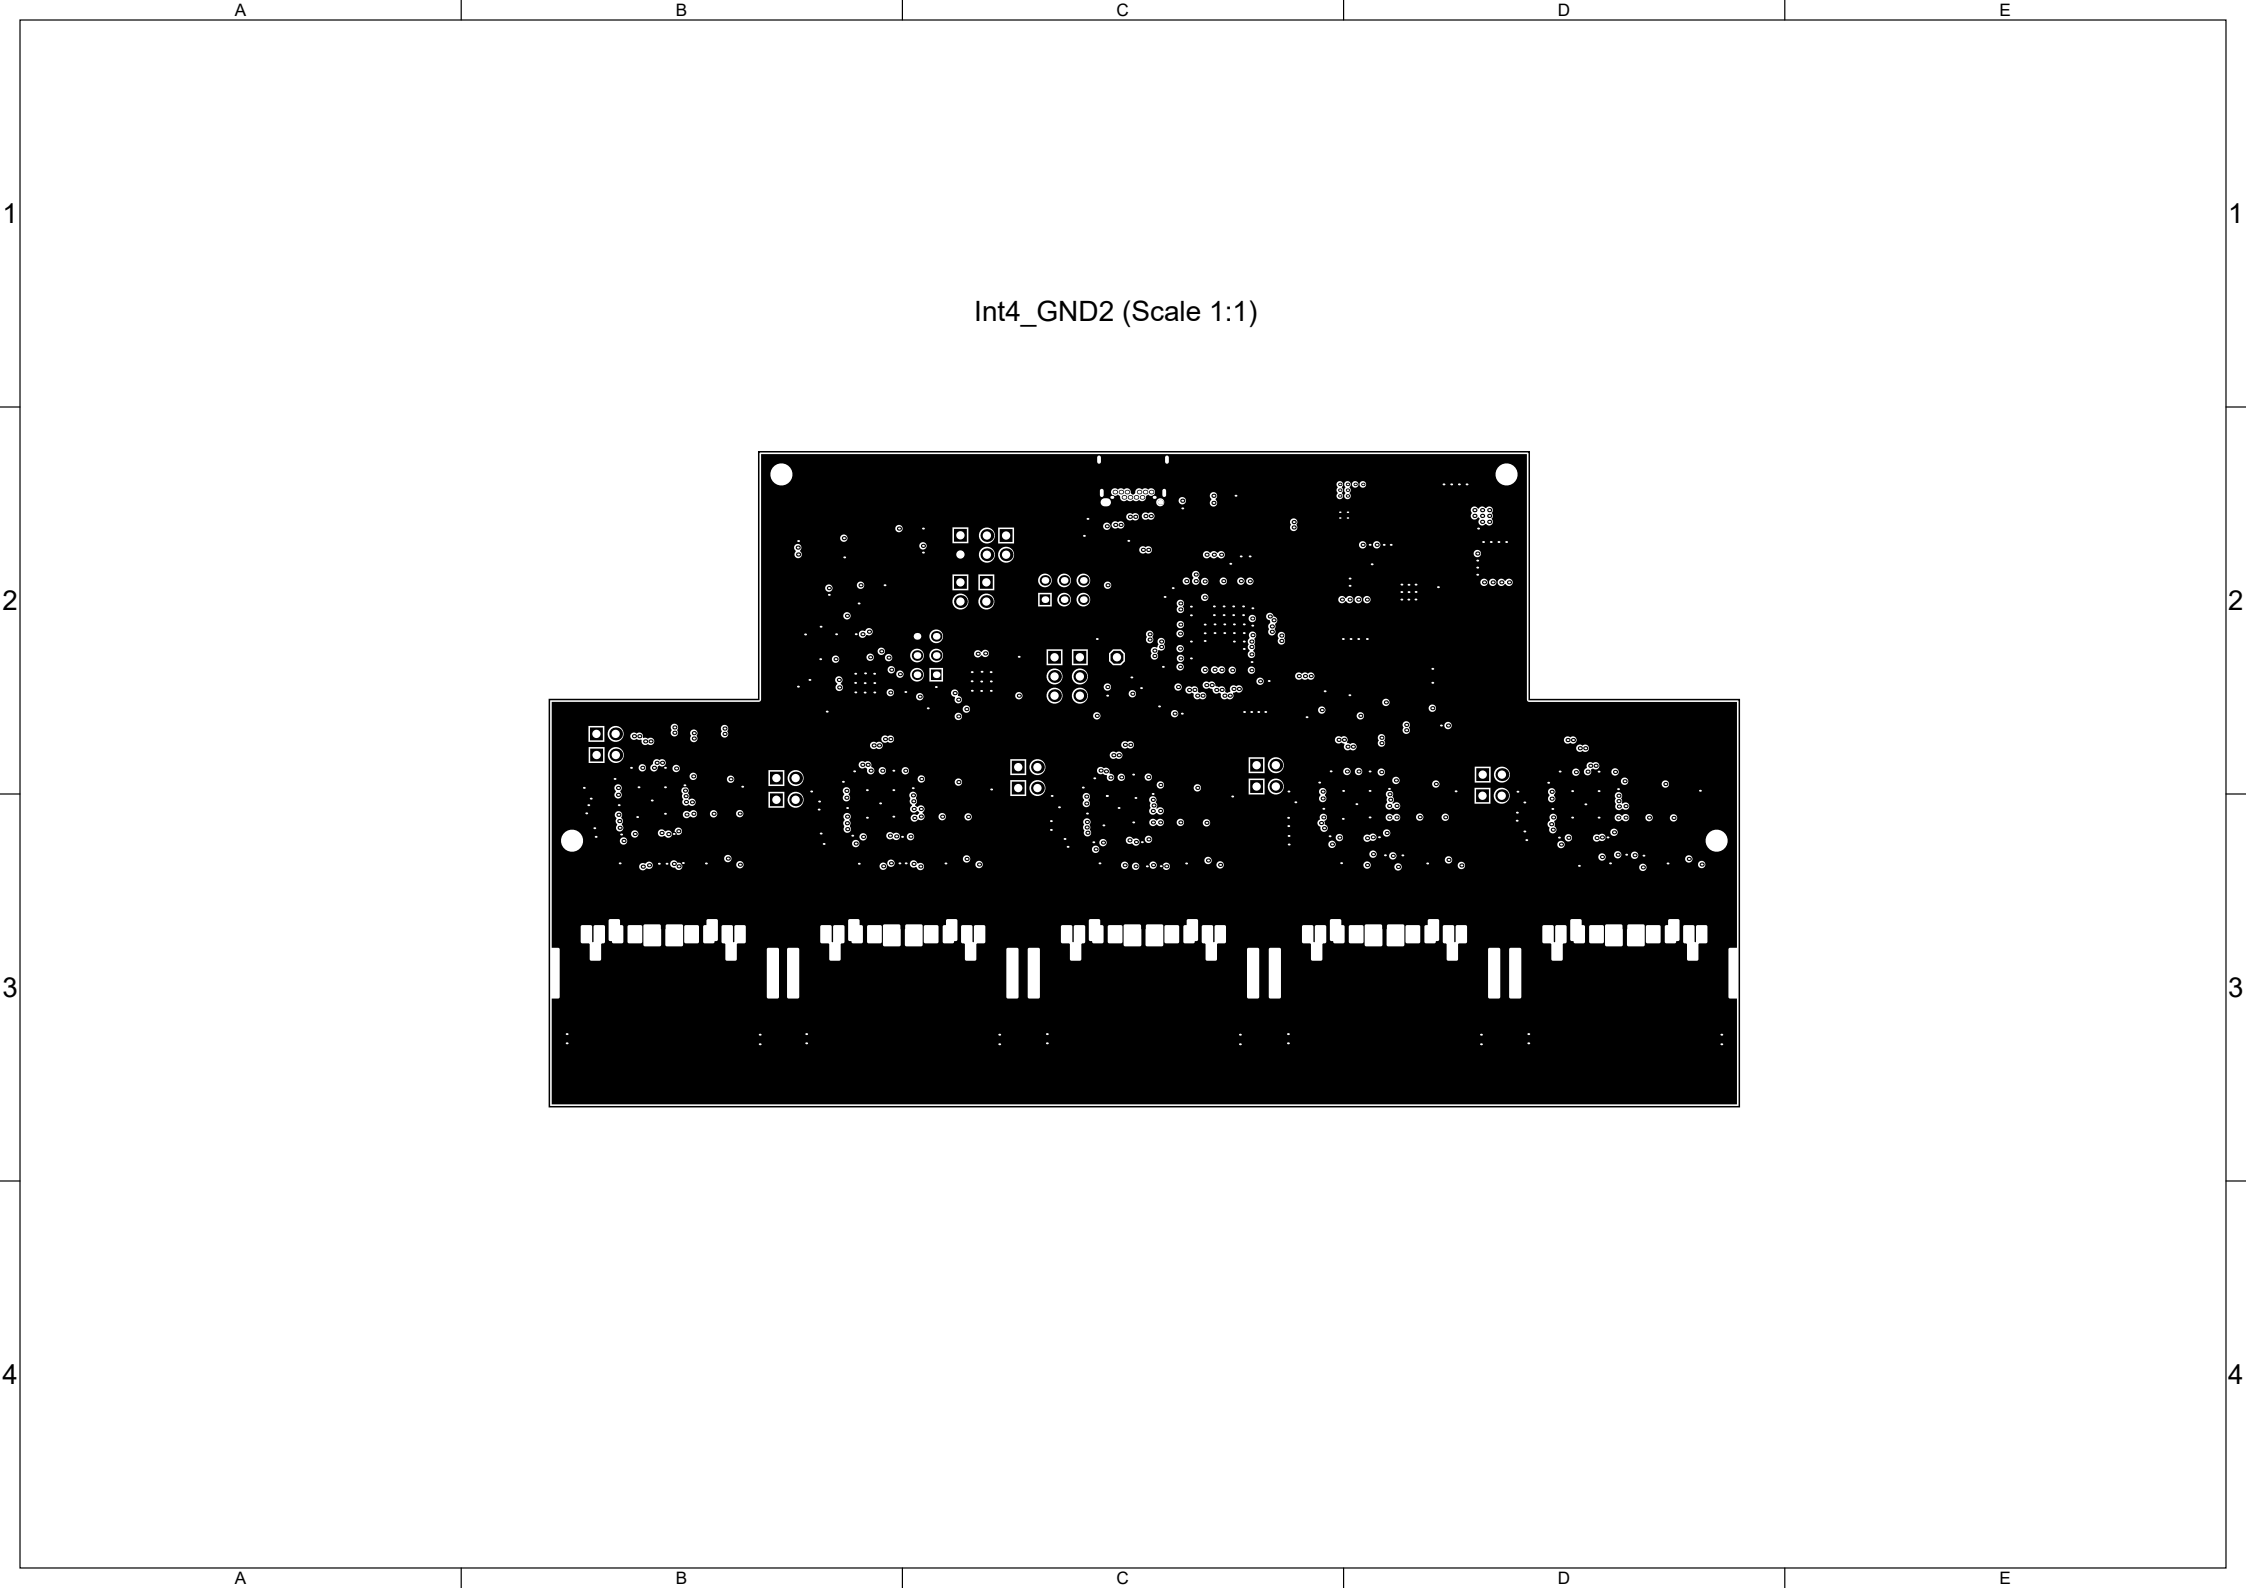

A

B

C

D

E

1

1

Bottom Layer (Scale 1:1)

2


2

3

3

4

4

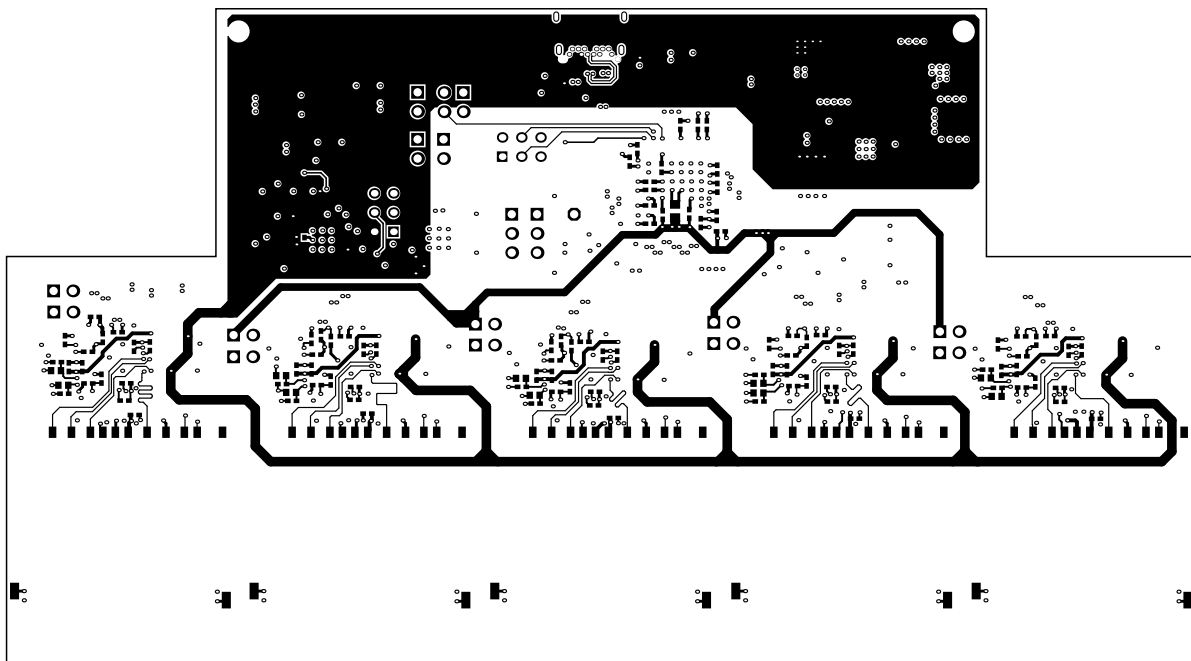

A


B

C

D

E

Drill Drawing View (Scale 1:1)

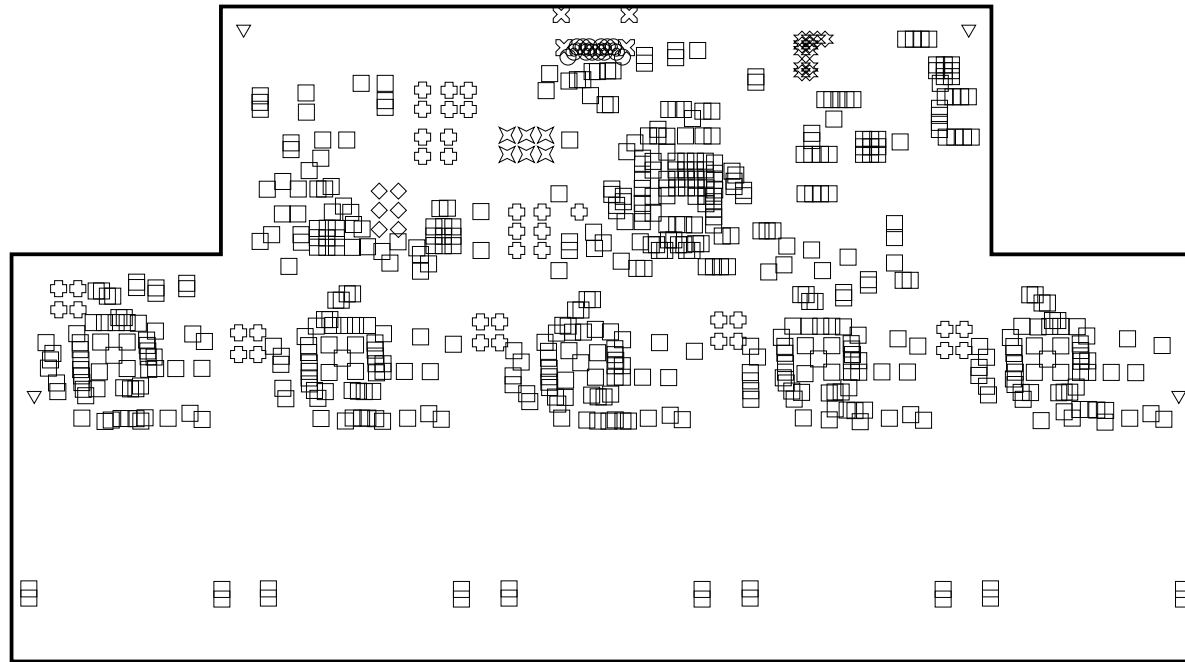

Drill Table

Symbol	Count	Hole Size	Plated	Hole Tolerance
☆	12	0.20mm	Plated	
□	572	0.25mm	Plated	
⊙	12	0.40mm	Plated	
⊗	4	0.50mm	Plated	
○	2	0.65mm	Non-Plated	
✕	6	0.89mm	Plated	
◇	6	0.89mm	Plated	
⊕	37	1.10mm	Plated	
▽	4	2.50mm	Plated	
655 Total				

Layer Stack Legend

Material	Layer	Thickness	Dielectric Material	Type	Gerber
	Top Overlay			Legend	GTO
	Surface Material			Solder Mask	GTS
CF-004	Top Solder	0.03mm	SM-001		
Prepreg	Top Layer	0.04mm		Signal	GTL
		0.10mm	PP-015	Dielectric	
CF-003	Int1_GND1	0.02mm		Signal	G1
Core		0.55mm	Core-037	Dielectric	
CF-003	Int2 Sig1	0.02mm		Signal	G2
Prepreg		0.11mm	PP-016	Dielectric	
CF-003	Int3_PWR1	0.02mm		Signal	G3
Core		0.55mm	Core-037	Dielectric	
CF-003	Int4_GND2	0.02mm		Signal	G4
Prepreg		0.10mm	PP-015	Dielectric	
CF-004	Bottom Layer	0.04mm		Signal	GBL
Surface Material	Bottom Solder	0.03mm	SM-001	Solder Mask	GBS
	Bottom Overlay			Legend	GBO
Total thickness: 1.59mm					