

Accessibility by and to transit; comparison with transit Supply Index results

James Reynolds

2025-07-10

Introduction

Currie and Senbergs [2007] and Currie [2010] previously developed a transit Supply Index (SI) to compare public transport frequency and coverage between across geographic areas (such as census districts). Code to calculate SI scores from GTFS datasets was recently developed as an R package¹, with SI scores² also provided as an input to a forthcoming paper on how transit service levels impact housing prices³.

The SI provides a combined measure of both accessibility ‘by transit’ and ‘to transit’ by including service frequency and service coverage in the calculations. However, the extent to which ‘by transit’ or ‘to transit’ might influence housing prices is unclear, as the Liang et al. [in press] modeling included only the (combined) SI score. To further explore and compare how housing prices might be influenced by transit accessibility (both ‘by’ and ‘to’ transit) a set of corresponding scores need to be calculated.

This note describes the development of these ‘by’ and ‘to’ transit scores, as a follow up to the SI scores previously provided. The rest of this document is structured as follows: the next section outlines the context of the SI. Methods used to develop the ‘by’ and ‘to’ transit accessibility metrics are then described, followed by presentation of results for SA1s in Victoria. The results, including differences to the SI scores are then discussed.

Research context: the Supply Index

The Supply Index (SI) equation is shown in the margin figure⁴, in which: (1) $SI_{area,time}$ is the Supply Index for the area of interest and a given period of time; (2) $Area_{Bn}$ is the buffer area for each stop (n) within the area of interest. In Currie and Senbergs (2007) this was based on a radius of 400 metres for bus and tram stops, and 800

¹ See Reynolds et al. [under review] and <https://github.com/James-Reynolds/gtfssupplyindex>

² For SA1s accross all of Victoria for the week starting 27/04/23

³ Liang et al. [in press]

$$SI_{area,time} = \sum \frac{Area_{Bn}}{Area_{area}} * SI_{n,time} \quad (1)$$

⁴ Minor adjustments have been made to generalise the equation, as Currie and Senbergs (2007) focus was the context of Melbourne’s Census Collection Districts (CCD) and calculations based on a week of transit service. CCDs predate the introduction of Statistical Areas 1, 2, 3, and 4 (SA1, SA2, SA3, SA4), and other geographical divisions currently used by the Australian Bureau of Statistics (ABS), which may be more familiar to readers.

metres for railway stations; (3) $Area_{area}$ is the area of the area of interest; and (4) $SL_{n,time}$ is the number of transit arrivals for each stop for a given time period.

Methodology

The SI equation lends itself to a simple separation into coverage and frequency components, as per equations 2 and 3. For coverage, this is a measure of how much of each area of interest is within the buffer areas of nearby transit stops. However, as the buffer areas of nearby stops might overlap it is possible to have a coverage value that is larger than 100%.

The frequency measure is a summation of the number of transit arrivals (for the given time period) at stops where there is some overlap of the stop buffer area with the area of interest.

$$Coverage_{area} = \sum \frac{Area_{Bn}}{Area_{area}} \quad (2)$$

$$Frequency_{area,time} = \sum SL_{n,time} \text{ for } \frac{Area_{Bn}}{Area_{area}} > 0 \quad (3)$$

Coverage calculation

As shown in Figure 1, the gtfssupplyindex consists of a number of R functions that perform parts of the SI calculation, starting with: a definition of the buffer distances to be used, a shape file (defining the areas of interest), a gtfs file. These are variously transformed into different tables (e.g. buffer_distance, areas_of_interest, list_gtfs etc.), culminating in the si_by_area table that produces a SI score for each area of interest (or the si_by_area_and_hour table that produces SI scores for each area of interest for each hour of the day)

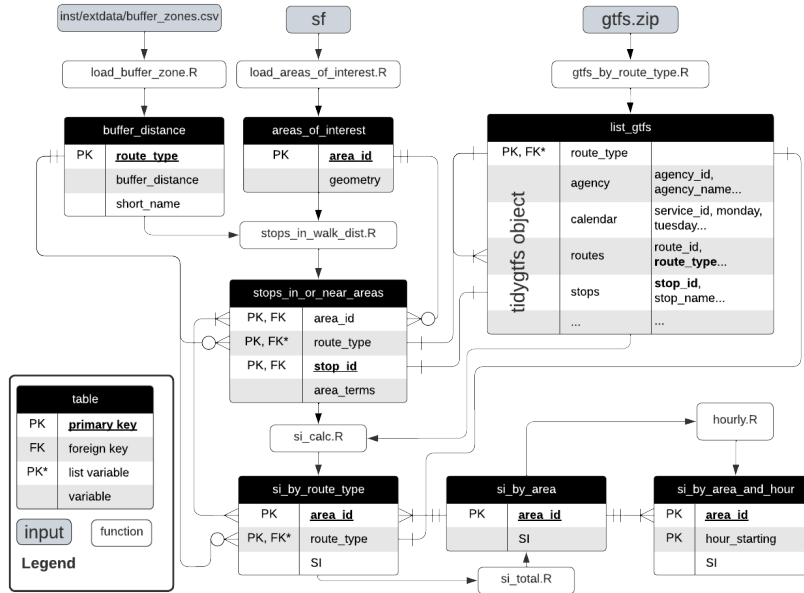


Figure 1: gtfssupplyindex package structure

The `stops_in_or_near_areas` table is key to calculating coverage, as this table details the `area_terms` for each combination of `area_id`, `route_type` and `stop_id`. Calculation of the $Coverage_{area}$ value for each area will therefore be a matter of adding the `area_terms` for all combinations of `route_type` and `stop_id` that apply to each area of interest (defined by `area_id`).

Frequency calculation

Mornington Penninsula test data

The `gtfssupplyindex` package includes a set of test data, sourced from the ABS SA1 (2021) boundaries and the Mornington Penninsula Tourist Railway GTFS feed. This GTFS feed includes only three stations and a small number of trips, and so is useful for testing that code runs as expected, and to hand-verify calculation results.

Victoria

Results

Mornington Penninsula

The calculated coverages are shown in Table 1, while Figure 2 shows a plot of the parts of the SA1s that are within the buffer areas around each of the stations.

```
## Reading layer `mornington_sa12021' from data source
##   `/Library/Frameworks/R.framework/Versions/4.4-arm64/Resources/library/gtfssupplyindex/extdata/morn
##   using driver `GeoJSON'
## Simple feature collection with 392 features and 1 field
## Geometry type: MULTIPOLYGON
## Dimension:      XY
## Bounding box:   xmin: 144.6514 ymin: -38.49738 xmax: 145.2615 ymax: -38.16239
## Geodetic CRS:   WGS 84

## Warning: attribute variables are assumed to be spatially constant throughout
## all geometries
```

Table 1: Mornington Penninsula Tourist Railway coverage by SA1

area_id	coverage
21402138114	0.5298114
21402138115	0.0651631
21402138128	0.1514726

area_id	coverage
21402138502	0.0354876
21402138507	0.0162559
21402138508	0.0478445
21402159101	0.7999912
21402159102	0.0168220
21402159105	0.6779951
21402159107	0.6453927
21402159111	0.9776828
21402159112	0.0113615
21402159113	0.1753479
21402159114	0.9531028
21402159115	0.9729829
21402159119	0.8572666
21402159121	0.8591658
21402159122	0.0693544
21402159124	1.0000000
21402159131	1.0000000
21402159134	0.7596671
21402159135	0.1037503
21402159136	1.0000000
21402159202	0.0000451
21402159203	0.4499354
21402159208	0.1885829
21402159210	0.1158566
21402159212	0.0503650
21402159215	0.9882572
21402159221	0.5639974

Results appear consistent with expectations, with most SA1s having only partial coverage. Three SA1s, however, have 100% coverage⁵, matching the three small SA1s⁶ within the walking catchment of the south-western-most station. The result for area_id 21402159111 also meets expectations, being the SA1 that is almost, but not quite, completely covered by parts of the south-western and centre-most station buffer areas⁷.

⁵ 21402159134, 21402159131 and 21402159136

⁶ Dark blue, light blue and purple

⁷ Being 98% covered, in light green

Discussion and conclusions

References

Graham Currie. Quantifying spatial gaps in public transport supply based on social needs. *Journal of Transport*

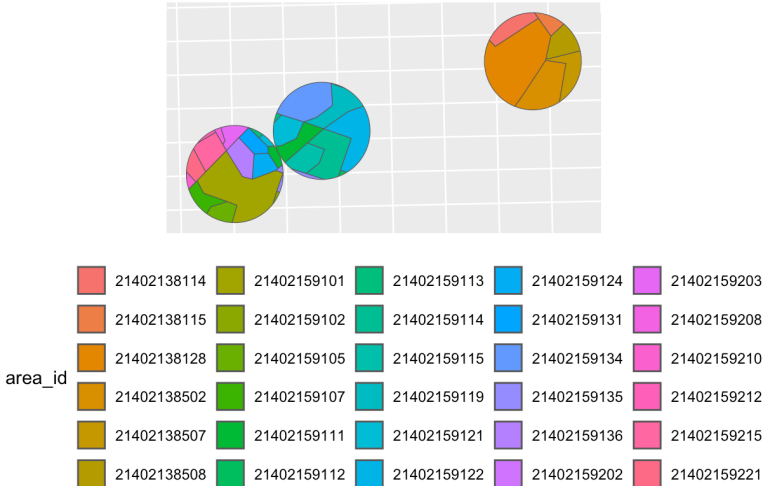


Figure 2: Mornington Peninsula SA1 coverage plot

Geography, 18(1):31–41, 2010. ISSN 0966-6923. DOI:
<https://doi.org/10.1016/j.jtrangeo.2008.12.002>. URL <https://www.sciencedirect.com/science/article/pii/S0966692308001518>.

Graham Currie and Zed Senbergs. Identifying spatial gaps in public transport provision for socially disadvantaged Australians: the Melbourne needs-gap study. In *Australasian Transport Research Forum*. Australasian Transport Research Forum, 2007.

Jian Liang, Graham Currie, Kang Mo Koo, and James Reynolds. Exploring factors affecting how transit service level influences housing prices by individual transit mode. *Available at SSRN 5144567*, in press.

James Reynolds, Graham Currie, and Yanda Qu. Social needs and gaps in transit service: new gtfs tools & updates to 2021 data. In *Australasian Transport Research Forum 2025*, Auckland, New Zealand, under review.