
Verification Hoodie

Style number	**VT-HD-001**
Revision	**R1 — Ready for manufacturer review**
Issued	**2026-10-12**
Garment	**Pullover hoodie (template hoodie-pullover v1)**
Construction	**pullover · two-panel lined hood, drawcord through eyelets, kangaroo pocket, dropped shoulder, rib cuffs, rib hem band**
Season	**—**
Collection / set	**—**
Sizes	**XS, S, M, L, XL (base M)**
Colorways	**Main**

Revision notes
Verification run: Verification Hoodie

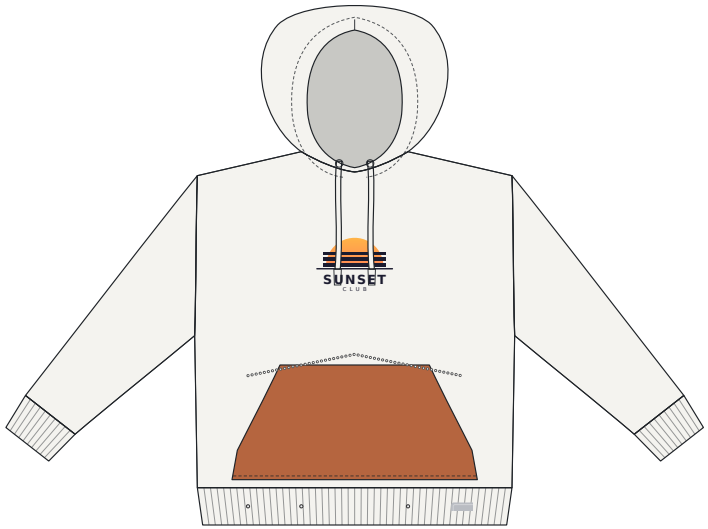


Front

Appearance preview (ghost mockup)





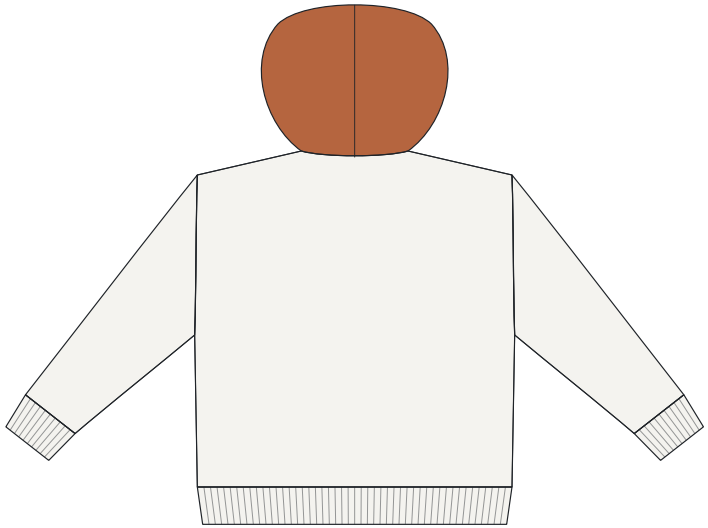


Back


Mockups are appearance previews. They do not simulate fit or drape and are not color standards.

Technical flats

Numbered callouts refer to the table below. Drawn at nominal scale for size M; flats are not patterns.

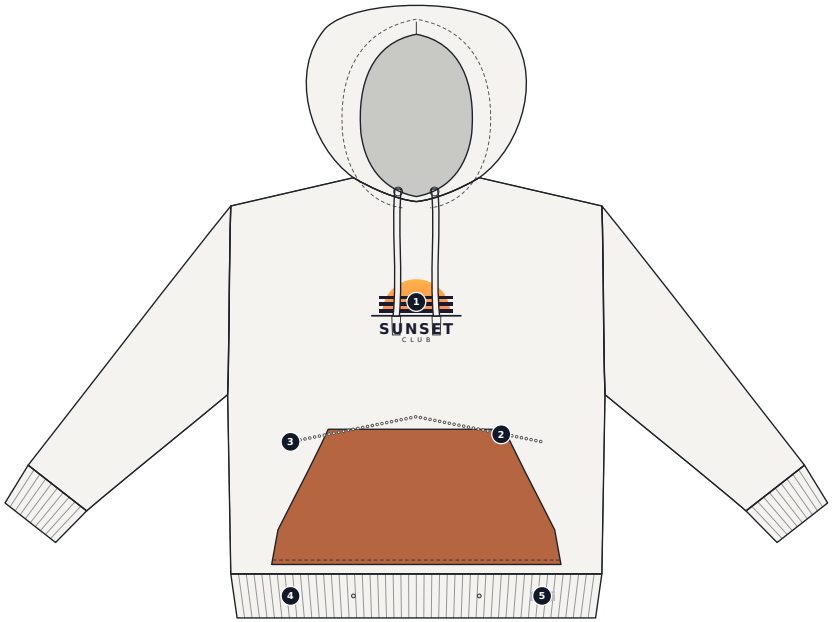

FRONT

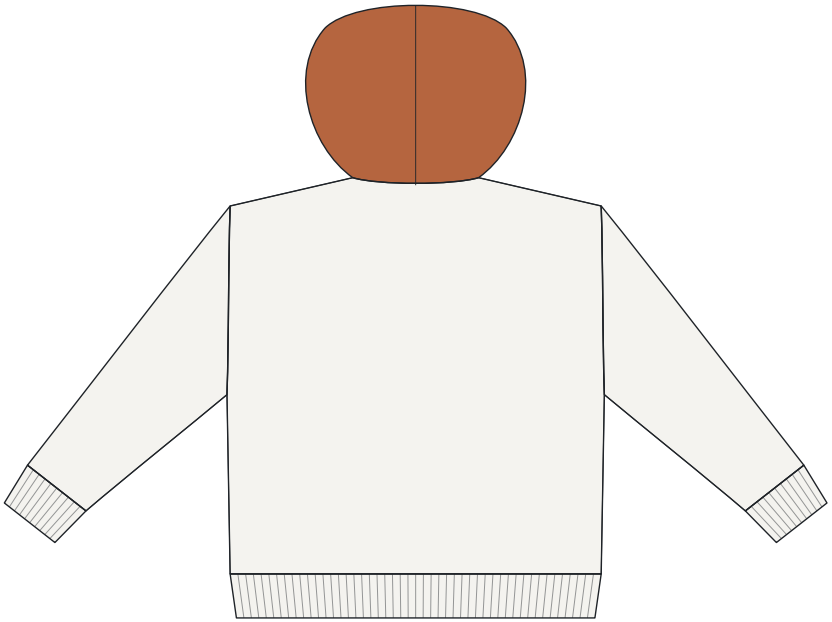

BACK

#	View	Item	Specification
1	front	Logo	Embroidery · 18 × 13.5 cm · Top of artwork: 2 cm below, centered from Center chest
2	front	Stitching — Pocket topstitch (openings & top)	Double needle appearance, thread Clay. Twin-needle topstitch 6 mm on pocket openings and top, 10 SPI.
3	front	Rhinestones	53 × rhinestone SS16 (3.9 mm), Crystal, hotfix
4	front	Studs	4 × stud 6 mm (6 mm), Nickel, prong set
5	front	Metal badge plate	Metal badge plate, Brushed silver, 40 mm. Visual placement only.

Colorways & color references

Screen colors are display approximations only. Physical color must be approved against the referenced standard or a lab dip. No color-standard codes are generated by this application.

Component	Main
Front body	Optic white 400 g brushed fleece
Back body	Optic white 400 g brushed fleece
Left sleeve (wearer’s left)	Optic white 400 g brushed fleece
Right sleeve (wearer’s right)	Optic white 400 g brushed fleece
Hood (outer)	front: Optic white; back: Clay
Hood lining	Optic white French terry
Kangaroo pocket	Clay 400 g brushed fleece
Left cuff	Optic white 2x2 cotton rib
Right cuff	Optic white 2x2 cotton rib
Hem band	Optic white 2x2 cotton rib
Drawcord	Optic white Flat cotton drawcord 12 mm

Palette

Color	Screen value	Color standard (user supplied)	Approval status
Optic white	#F4F3EF	Not supplied	not submitted
Clay	#B5653F	Not supplied	not submitted

Materials & bill of materials

Fabric consumption is never inferred from the drawing; quantities shown are as entered. Counted quantities come directly from placed items.

Materials

Material	Type	Composition	Weight	Finish	Supplier / ref	Used on	Notes
400 g brushed fleece	fabric	80% cotton, 20% polyester	400 g/m²	—	Example Mill / EM-F400	Front body, Back body, Left sleeve (wearer's left), Right sleeve (wearer's right), Hood (outer), Kangaroo pocket	
2x2 cotton rib	rib	95% cotton, 5% elastane	320 g/m²	—	Example Mill / EM-R22	Left cuff, Right cuff, Hem band	
Flat cotton drawcord 12 mm	trim	100% cotton	n/a	—	Example Trims / ET-DC12	Drawcord	
French terry	fabric	100% cotton	330 g/m²	—	Example Mill / EM-FT330	Hood lining	

Bill of materials

Category	Component	Material / trim	Description	Qty	Unit	Qty type	Colorways	Supplier ref	Notes
fabric	Front body, Back body, Left sleeve (wearer's left), Right sleeve (wearer's right), Hood (outer), Kangaroo pocket	**400 g brushed fleece**	80% cotton, 20% polyester · 400 g/m²	—	m	not entered	All	EM-F400	
fabric	Hood lining	**French terry**	100% cotton · 330 g/m²	—	m	not entered	All	EM-FT330	
rib	Left cuff, Right cuff, Hem band	**2x2 cotton rib**	95% cotton, 5% elastane · 320 g/m²	—	m	not entered	All	EM-R22	
trim	Drawcord	**Flat cotton drawcord 12 mm**	100% cotton	—	m	not entered	All	ET-DC12	
thread	1 seam	**Thread — Clay**	Match to color standard	—	cones	not entered	All	—	
embellishment	Garment	**Rhinestone SS16 — Crystal**	3.9 mm, hotfix	53	pcs	counted	All	—	
embellishment	Hem band	**Stud 6 mm — Nickel**	6 mm, prong set	4	pcs	counted	All	—	
hardware	Hem band	**Metal badge plate — Brushed silver**	40 mm	1	pcs	counted	All	—	

Artwork, placement & application

Placement offsets are measured from the named reference point on the finished garment. Appearance previews are not machine files (no embroidery DST or separations are produced).




Artwork	Logo
Source file	logo.svg (SVG, kept as uploaded)
Method	Embroidery
Finished size	**18 W × 13.5 H cm**
Placement	Top of artwork: 2 cm below, centered from Center chest
Reference	Center chest — Center front, 110 mm below the HPS line (template reference).
Rotation	0°
Tolerance	± 0.5 cm
View / panels	front · Front body (clipped to these panels)
Colors	—
Notes	—

Embellishments & hardware


Item	Type	Size	Finish	Qty	Attachment / note
Rhinestones	rhinestone SS16	3.9 mm	Crystal	53	hotfix · counted from placements.
Studs	stud 6 mm	6 mm	Nickel	4	prong set · counted from placements.
Metal badge plate	Metal badge plate	40 mm	Brushed silver	1	Visual placement only.

Measurement diagrams

Points of measure (POM) for the garment laid flat. Diagrams show where to measure; they are not drawn to the size table values.

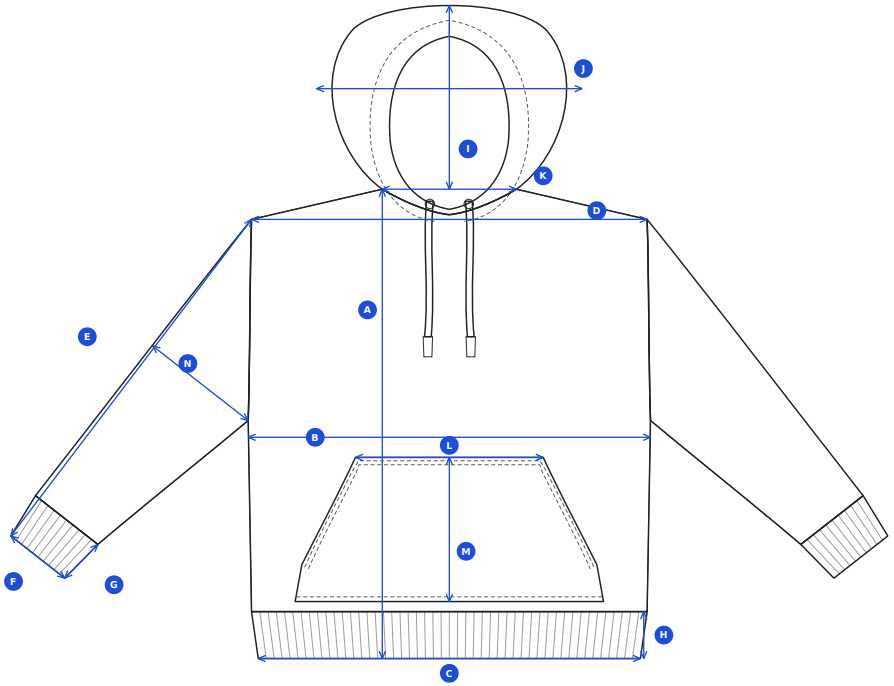

FRONT

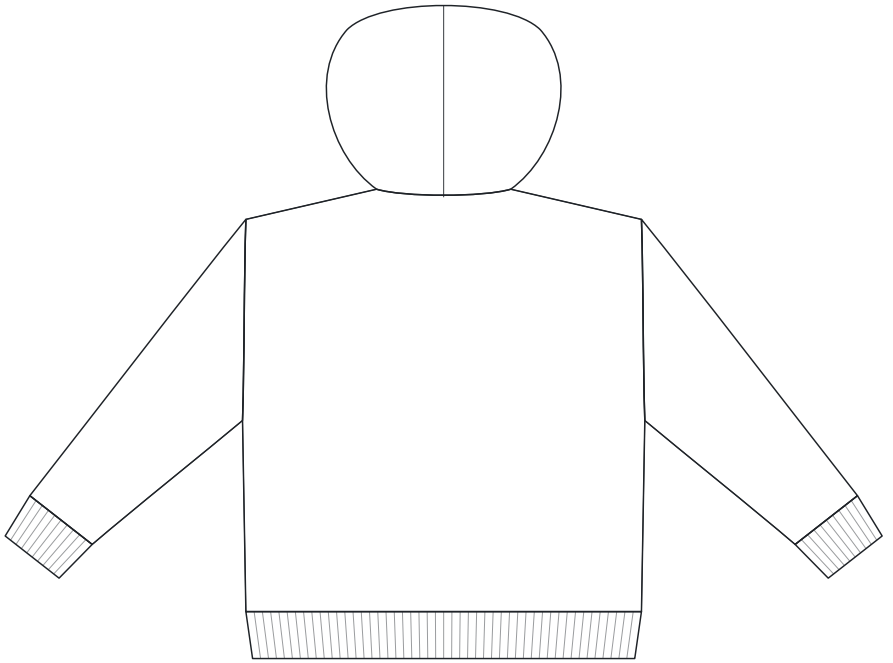

BACK

POM	Description	How to measure
A	Body length from HPS (incl. hem band)	From high point shoulder straight down to the bottom edge of the hem band.
B	Chest width (1" below armhole)	Straight across, edge to edge, 25 mm below the underarm point.
C	Hem band width (relaxed)	Across the bottom edge of the hem band, relaxed.
D	Across shoulder	Shoulder point to shoulder point.
E	Sleeve length from shoulder point (incl. cuff)	Along the top of the sleeve from shoulder point to cuff edge.
F	Cuff opening (relaxed, half)	Across the cuff edge, relaxed.
G	Cuff height	From cuff seam to cuff edge.

Measurement diagrams (continued)

POM	Description	How to measure
H	Hem band height	From hem band seam to bottom edge.
I	Hood height	From the HPS line straight up to the top of the hood, hood laid flat.
J	Hood width (flat, widest)	Across the widest point of the hood laid flat.
K	Neck width (seam to seam)	HPS to HPS at the hood seam.
L	Pocket width at top	Across the top edge of the kangaroo pocket.
M	Pocket height	Center pocket from top edge to bottom attach seam.
N	Bicep (half)	From the underarm point perpendicular to the top sleeve fold.

Size specification (centimetres)

Base size M. * = template default value, † = POM not yet confirmed. Values are as entered — no grading rules are applied by this application. V1 does not simulate fit or drape.

POM	Description	Tol −	Tol +	XS	S	M (base)	L	XL	Status
A	Body length from HPS (incl. hem band)	1.27	1.27	68	69	**70**	71	72	Confirmed
B	Chest width (1" below armhole)	1.27	1.27	56	58	**60**	62	64	Confirmed
C	Hem band width (relaxed)	1.27	1.27	53	55	**57**	59	61	Confirmed
D	Across shoulder	0.95	0.95	55	57	**59**	61	63	Confirmed
E	Sleeve length from shoulder point (incl. cuff)	0.95	0.95	57.3	58.3	**59.3**	60.3	61.3	Confirmed
F	Cuff opening (relaxed, half)	0.64	0.64	9.6	9.9	**10.2**	10.5	10.8	Confirmed
G	Cuff height	0.32	0.32	7	7	**7**	7	7	Confirmed
H	Hem band height	0.32	0.32	7	7	**7**	7	7	Confirmed
I	Hood height	0.95	0.95	26.4	26.9	**27.4**	27.9	28.4	Confirmed
J	Hood width (flat, widest)	0.95	0.95	38.6	39.1	**39.6**	40.1	40.6	Confirmed
K	Neck width (seam to seam)	0.64	0.64	19.4	19.7	**20**	20.3	20.6	Confirmed
L	Pocket width at top	0.64	0.64	26	27	**28**	29	30	Confirmed
M	Pocket height	0.64	0.64	20.5	21	**21.5**	22	22.5	Confirmed
N	Bicep (half)	0.64	0.64	17.1	17.6	**18.1**	18.6	19.1	Confirmed

Construction notes & details


No construction notes entered.

Stitching

Dashes on the flats are illustrative. Stitch type, SPI, and seam construction are defined only by the notes below.

Layer	Seams	Appearance	Thread color	Manufacturing notes
Stitching — Pocket topstitch (openings & top)	Pocket topstitch (openings & top)	Double needle	Clay	Twin-needle topstitch 6 mm on pocket openings and top, 10 SPI.

Detail views

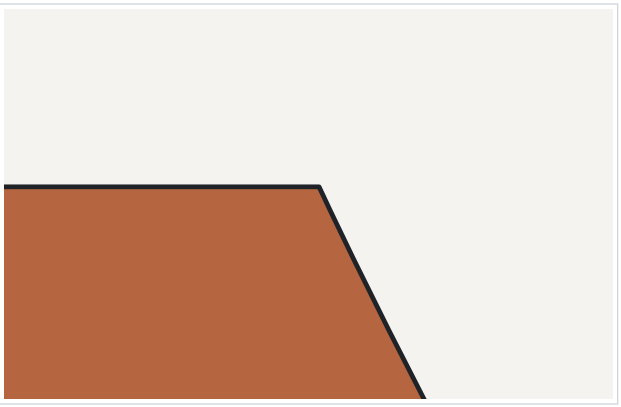

Pocket topstitch (openings & top) (front)

Garment structure

Pullover hoodie: pullover; two-panel lined hood, drawcord through eyelets, kangaroo pocket, dropped shoulder, rib cuffs, rib hem band. Decorative items (including decorative zippers or hardware) do not change this construction unless a separate garment template is used.

Revision history

Revision	Date	Type	Notes
R1	2026-10-12	Ready for manufacturer review	Verification run: Verification Hoodie

This document is a specification issued for review and sampling. It is not a manufacturer approval and does not replace physical sample approval.

Specification checks

All required checks passed at the time of issue.

Recommended (10)

Section	Item
materials	Material “Flat cotton drawcord 12 mm” needs a fabric weight (g/m² or oz/yd²).
colors	Color “Optic white” has no color-standard reference. Add the code you have verified (screen color is not a match).
colors	Color “Clay” has no color-standard reference. Add the code you have verified (screen color is not a match).
artwork	“Logo”: no artwork ID yet.
bom	BOM “400 g brushed fleece”: quantity not entered (consumption is never inferred from the drawing).
bom	BOM “French terry”: quantity not entered (consumption is never inferred from the drawing).
bom	BOM “2x2 cotton rib”: quantity not entered (consumption is never inferred from the drawing).
bom	BOM “Flat cotton drawcord 12 mm”: quantity not entered (consumption is never inferred from the drawing).
bom	BOM “Thread — Clay”: quantity not entered.
construction	No construction notes yet — describe seams, finishes and assembly.