
Verification Sweatpants


Style number	**VT-SP-001**
Revision	**R1 — Ready for manufacturer review**
Issued	**2026-10-12**
Garment	**Straight-leg sweatpants (template sweatpants-straight v1)**
Construction	**elastic-waist · elastic waistband, internal drawcord, on-seam side pockets, back patch pocket, straight leg, hemmed opening**
Season	**—**
Collection / set	**—**
Sizes	**XS, S, M, L, XL (base M)**
Colorways	**Main**


Revision notes
Verification run: Verification Sweatpants

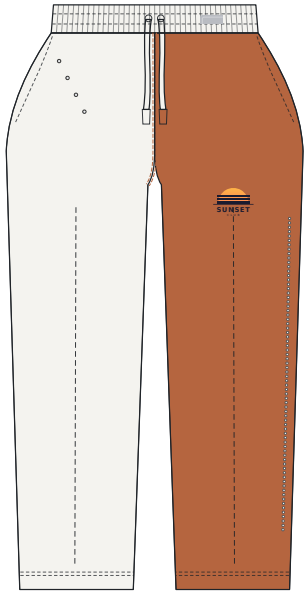

Front


Appearance preview (ghost mockup)

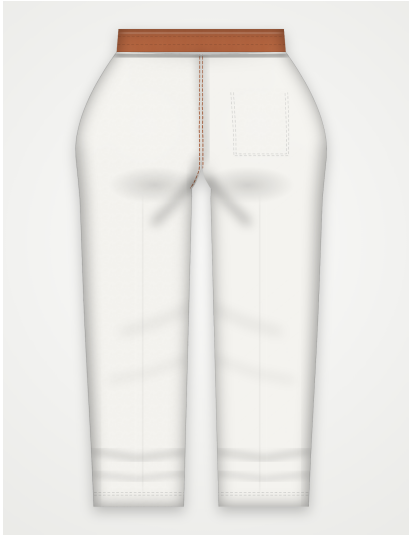

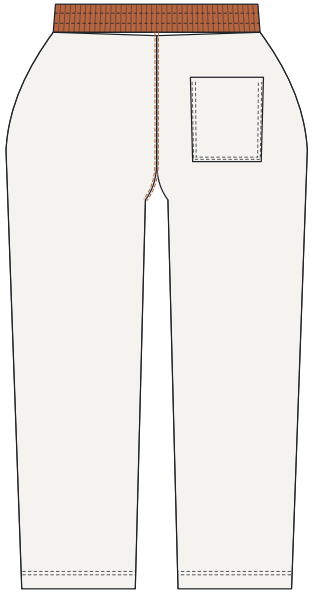Mockups are appearance previews. They do not simulate fit or drape and are not color standards.



Back

Technical flats

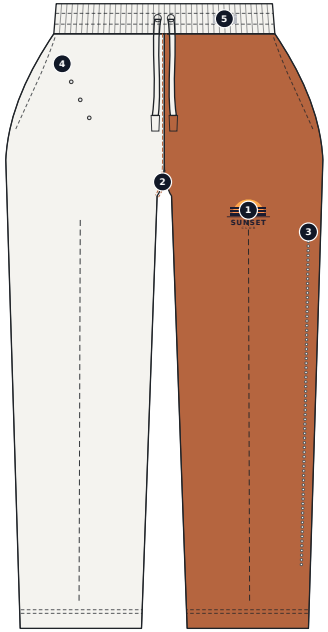Numbered callouts refer to the table below. Drawn at nominal scale for size M; flats are not patterns.



FRONT

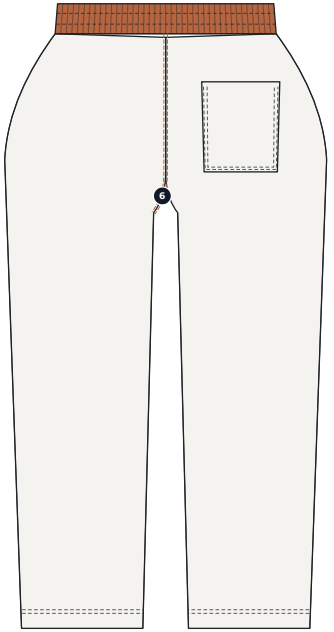

BACK

#	View	Item	Specification
1	front	Logo	Embroidery · 9 × 6.75 cm · Top of artwork: 2 cm below, centered from Left thigh
2	front	Stitching — Front rise seam, Back rise seam	Double needle appearance, thread Clay. Twin-needle 6 mm on front and back rise, 10 SPI.
3	front	Rhinestones	72 × rhinestone SS16 (3.9 mm), Crystal, hotfix
4	front	Studs	4 × stud 6 mm (6 mm), Nickel, prong set
5	front	Metal badge plate	Metal badge plate, Brushed silver, 40 mm. Visual placement only.
6	back	Stitching — Front rise seam, Back rise seam	Double needle appearance, thread Clay. Twin-needle 6 mm on front and back rise, 10 SPI.

Colorways & color references

Screen colors are display approximations only. Physical color must be approved against the referenced standard or a lab dip. No color-standard codes are generated by this application.

Component	Main
Waistband	front: Optic white; back: Clay
Right front leg (wearer’s right)	Optic white 400 g brushed fleece
Left front leg (wearer’s left)	Clay 400 g brushed fleece
Left back leg (wearer’s left)	Optic white 400 g brushed fleece
Right back leg (wearer’s right)	Optic white French terry
Back pocket	Optic white 400 g brushed fleece
Drawcord	Optic white Flat cotton drawcord 12 mm

Palette

Color	Screen value	Color standard (user supplied)	Approval status
Optic white	#F4F3EF	Not supplied	not submitted
Clay	#B5653F	Not supplied	not submitted

Materials & bill of materials

Fabric consumption is never inferred from the drawing; quantities shown are as entered. Counted quantities come directly from placed items.

Materials

Material	Type	Composition	Weight	Finish	Supplier / ref	Used on	Notes
400 g brushed fleece	fabric	80% cotton, 20% polyester	400 g/m²	—	Example Mill / EM-F400	Right front leg (wearer’s right), Left front leg (wearer’s left), Left back leg (wearer’s left), Back pocket	
2x2 cotton rib	rib	95% cotton, 5% elastane	320 g/m²	—	Example Mill / EM-R22	Waistband	
Flat cotton drawcord 12 mm	trim	100% cotton	n/a	—	Example Trims / ET-DC12	Drawcord	
French terry	fabric	100% cotton	330 g/m²	—	Example Mill / EM-FT330	Right back leg (wearer’s right)	

Bill of materials

Category	Component	Material / trim	Description	Qty	Unit	Qty type	Colorways	Supplier ref	Notes
rib	Waistband	**2x2 cotton rib**	95% cotton, 5% elastane · 320 g/m²	—	m	not entered	All	EM-R22	
fabric	Right front leg (wearer’s right), Left front leg (wearer’s left), Left back leg (wearer’s left), Back pocket	**400 g brushed fleece**	80% cotton, 20% polyester · 400 g/m²	—	m	not entered	All	EM-F400	
fabric	Right back leg (wearer’s right)	**French terry**	100% cotton · 330 g/m²	—	m	not entered	All	EM-FT330	
trim	Drawcord	**Flat cotton drawcord 12 mm**	100% cotton	—	m	not entered	All	ET-DC12	
thread	2 seams	**Thread — Clay**	Match to color standard	—	cones	not entered	All	—	
embellishment	Garment	**Rhinestone SS16 — Crystal**	3.9 mm, hotfix	72	pcs	counted	All	—	
embellishment	Right front leg (wearer’s right)	**Stud 6 mm — Nickel**	6 mm, prong set	4	pcs	counted	All	—	
hardware	Waistband	**Metal badge plate — Brushed silver**	40 mm	1	pcs	counted	All	—	

Artwork, placement & application

Placement offsets are measured from the named reference point on the finished garment. Appearance previews are not machine files (no embroidery DST or separations are produced).




Artwork	Logo
Source file	logo.svg (SVG, kept as uploaded)
Method	Embroidery
Finished size	**9 W × 6.75 H cm**
Placement	Top of artwork: 2 cm below, centered from Left thigh
Reference	Left thigh — Wearer’s left front thigh, below the pocket opening.
Rotation	0°
Tolerance	± 0.5 cm
View / panels	front · Left front leg (wearer’s left) (clipped to these panels)
Colors	—
Notes	—

Embellishments & hardware


Item	Type	Size	Finish	Qty	Attachment / note
Rhinestones	rhinestone SS16	3.9 mm	Crystal	72	hotfix · counted from placements.
Studs	stud 6 mm	6 mm	Nickel	4	prong set · counted from placements.
Metal badge plate	Metal badge plate	40 mm	Brushed silver	1	Visual placement only.

Measurement diagrams

Points of measure (POM) for the garment laid flat. Diagrams show where to measure; they are not drawn to the size table values.

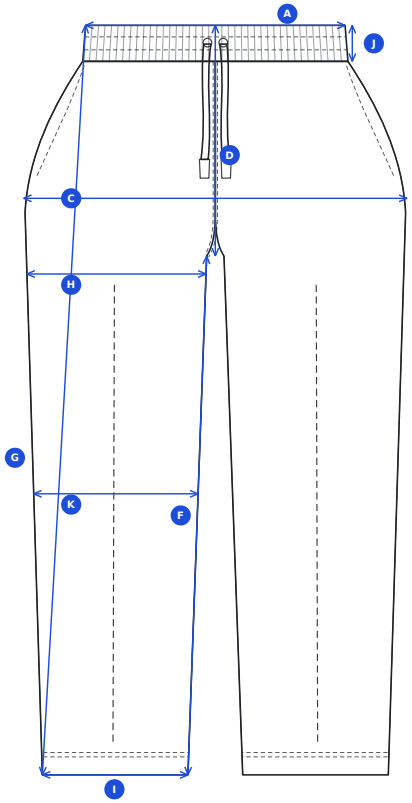

FRONT

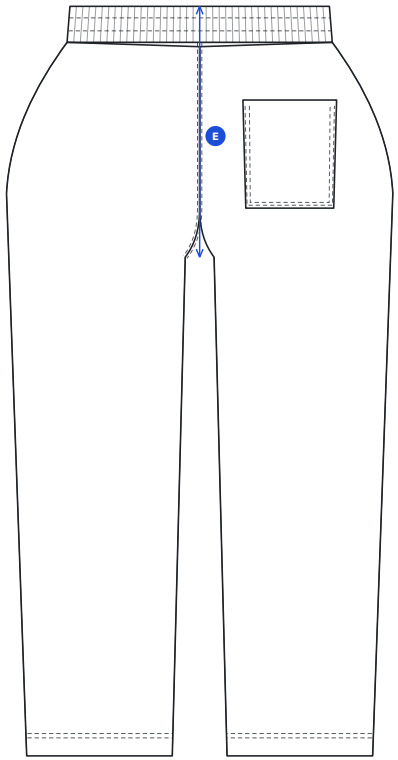

BACK

POM	Description	How to measure
A	Waist relaxed (half)	Across the top edge of the waistband, relaxed.
B	Waist extended (half)	Across the top edge of the waistband, fully stretched. Cannot be read from a drawing — enter from sample or factory spec.
C	Hip (half), 180 mm below waist top	Straight across, edge to edge, 180 mm below the top of the waistband.
D	Front rise (incl. waistband)	From the crotch seam junction to the top of the waistband at center front.
E	Back rise (incl. waistband)	From the crotch seam junction to the top of the waistband at center back.
F	Inseam	From the crotch seam junction along the inseam to the leg opening.
G	Outseam (incl. waistband)	From the top of the waistband along the side seam to the leg opening.

Measurement diagrams (continued)

POM	Description	How to measure
H	Thigh (half), 25 mm below crotch	Straight across the leg 25 mm below the crotch seam junction.
I	Leg opening (half)	Straight across the hem edge, laid flat.
J	Waistband height	From waistband seam to top edge.
K	Knee (half), 330 mm below crotch	Straight across the leg 330 mm below the crotch seam junction.

Size specification (centimetres)

Base size M. * = template default value, † = POM not yet confirmed. Values are as entered — no grading rules are applied by this application. V1 does not simulate fit or drape.

POM	Description	Tol −	Tol +	XS	S	M (base)	L	XL	Status
A	Waist relaxed (half)	1.27	1.27	32	34	**36**	38	40	Confirmed
B	Waist extended (half)	1.27	1.27	46	48	**50**	52	54	Confirmed
C	Hip (half), 180 mm below waist top	1.27	1.27	49.2	51.2	**53.2**	55.2	57.2	Confirmed
D	Front rise (incl. waistband)	0.64	0.64	30	31	**32**	33	34	Confirmed
E	Back rise (incl. waistband)	0.64	0.64	32.8	33.8	**34.8**	35.8	36.8	Confirmed
F	Inseam	0.95	0.95	72	72	**72**	72	72	Confirmed
G	Outseam (incl. waistband)	1.27	1.27	102.2	103.2	**104.2**	105.2	106.2	Confirmed
H	Thigh (half), 25 mm below crotch	0.64	0.64	23.8	24.3	**24.8**	25.3	25.8	Confirmed
I	Leg opening (half)	0.64	0.64	19.2	19.7	**20.2**	20.7	21.2	Confirmed
J	Waistband height	0.32	0.32	5	5	**5**	5	5	Confirmed
K	Knee (half), 330 mm below crotch	0.64	0.64	21.8	22.3	**22.8**	23.3	23.8	Confirmed

Construction notes & details


No construction notes entered.

Stitching


Dashes on the flats are illustrative. Stitch type, SPI, and seam construction are defined only by the notes below.

Layer	Seams	Appearance	Thread color	Manufacturing notes
Stitching — Front rise seam, Back rise seam	Front rise seam, Back rise seam	Double needle	Clay	Twin-needle 6 mm on front and back rise, 10 SPI.

Detail views

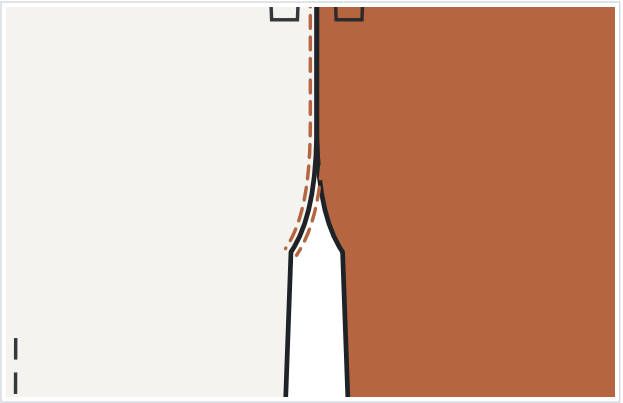

Front rise seam (front)

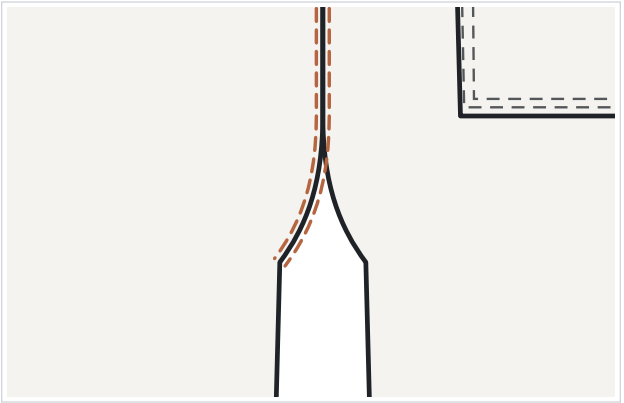

Back rise seam (back)

Garment structure

Straight-leg sweatpants: elastic-waist; elastic waistband, internal drawcord, on-seam side pockets, back patch pocket, straight leg, hemmed opening. Decorative items (including decorative zippers or hardware) do not change this construction unless a separate garment template is used.

Revision history

Revision	Date	Type	Notes
R1	2026-10-12	Ready for manufacturer review	Verification run: Verification Sweatpants

This document is a specification issued for review and sampling. It is not a manufacturer approval and does not replace physical sample approval.

Specification checks

All required checks passed at the time of issue.

Recommended (10)

Section	Item
materials	Material “Flat cotton drawcord 12 mm” needs a fabric weight (g/m² or oz/yd²).
colors	Color “Optic white” has no color-standard reference. Add the code you have verified (screen color is not a match).
colors	Color “Clay” has no color-standard reference. Add the code you have verified (screen color is not a match).
artwork	“Logo”: no artwork ID yet.
bom	BOM “2x2 cotton rib”: quantity not entered (consumption is never inferred from the drawing).
bom	BOM “400 g brushed fleece”: quantity not entered (consumption is never inferred from the drawing).
bom	BOM “French terry”: quantity not entered (consumption is never inferred from the drawing).
bom	BOM “Flat cotton drawcord 12 mm”: quantity not entered (consumption is never inferred from the drawing).
bom	BOM “Thread — Clay”: quantity not entered.
construction	No construction notes yet — describe seams, finishes and assembly.