

APP CRS	Rwy Idg	11570
284°	THRE	13
	Apt Elev	13

RNAV (RNP) Y RWY 28R




SAN FRANCISCO INTL (SFO)

GPS required. RF required. For inoperative ALSF, increase RNP 0.10* all Cats visibility to RVR 4500 and RNP 0.30* all Cats visibility to 1 $\frac{1}{2}$ mile. For uncompensated Baro-VNAV systems, procedure NA below 2°C (36°F) or above 54°C (130°F).
*Missed Approach requires minimum climb of 250 feet per NM to 2000.
#Missed Approach requires minimum climb of 325 feet per NM to 2500.



MISSED APPROACH: Climb to 3000 on track 284° to VIKYU and hold.

ATIS	NORCAL APP CON	SAN FRANCISCO TOWER	GND CON	CLNC DEL
113.7 115.8 118.85 135.45	134.5 338.2	120.5 269.1	121.8	118.2

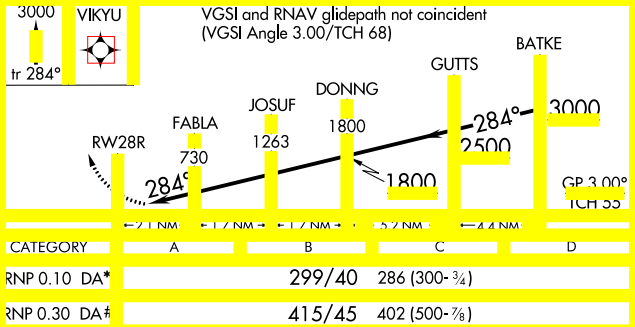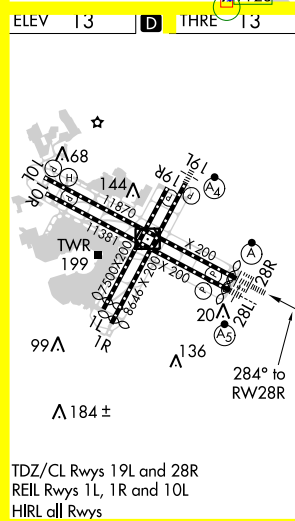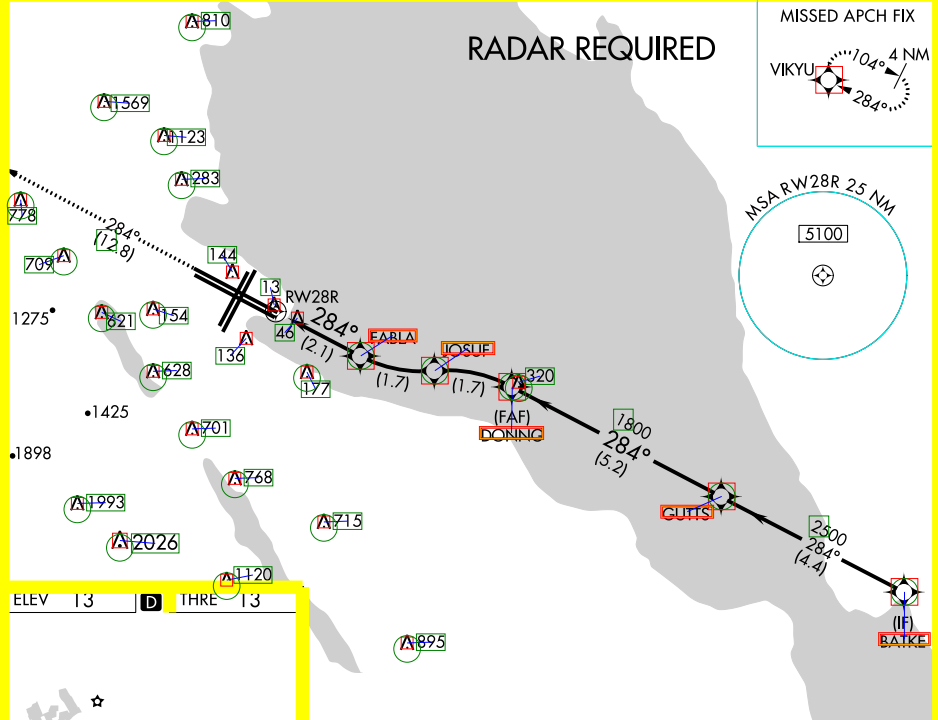

AUTHORIZATION REQUIRED

SW-2, 03 APR 2014 to 01 MAY 2014

SW-2, 03 APR 2014 to 01 MAY 2014