

APP CRS	Rwy Idg	11500
011°	TDZE	312
	Apt Elev	312

RNAV (RNP) Z RWY 1R


WASHINGTON DULLES INTL (IAD)

GPS required. For uncompensated Baro-VNAV systems, procedure NA below -14°C (6°F) or above 48°C (119°F). For inoperative ALSF-2, increase RNP 0.30 visibility to 1 3/4. Simultaneous approach authorized with ILS or LOC/DME Rwy 1L, ILS Rwy 1L (Cat III), ILS Rwy 1L (Cat III). Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 5000 via track 011° to FUREE and left turn direct HARPP and hold.

ATIS	POTOMAC APP CON	DULLES TOWER	GND CON	CLNC DEL
134.85	120.45 306.925	120.1 317.8 (Rwy 1R/19L) 120.25 348.6 (Rwy 1C/19C) 134.425 348.6 (Rwys 1L/19R and 12/30)	121.9 317.8 (EAST) 121.625 348.6 (WEST)	135.7 317.8

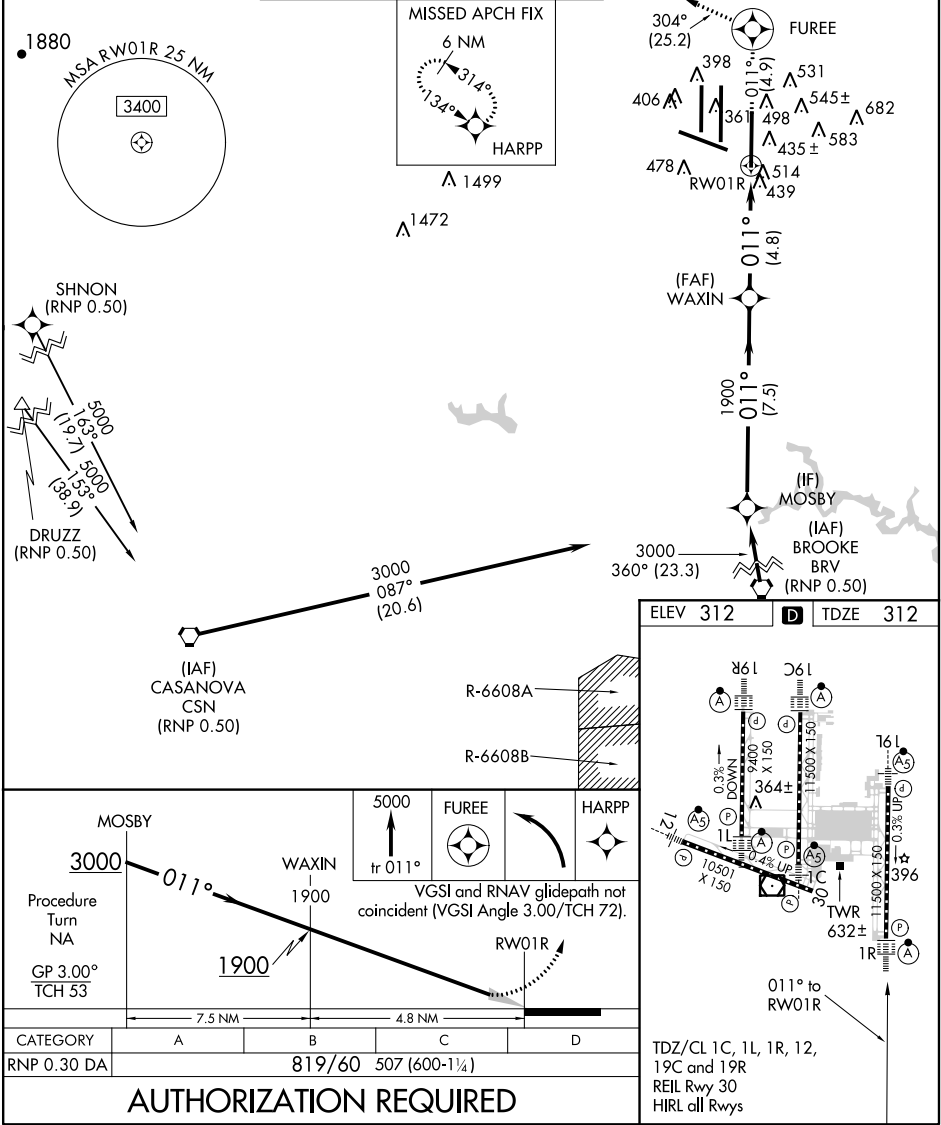

AUTHORIZATION REQUIRED

NE-3, 03 APR 2014 to 01 MAY 2014

NE-3, 03 APR 2014 to 01 MAY 2014