


IMU 1 / COMPLETE X-Y-Z / BUS 0 / 0x68

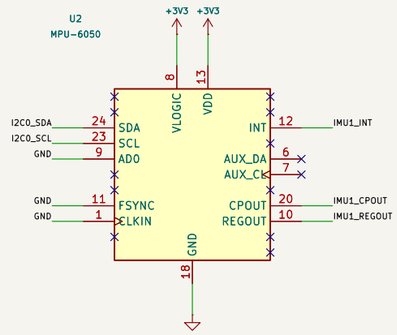


No center paste/pad. Reserved pins NC. All three packages share board axes.

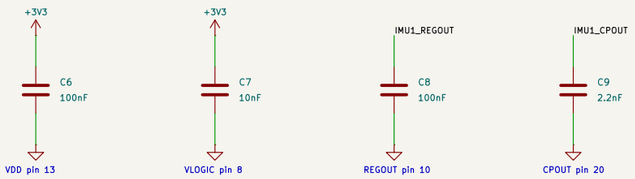


IMU 2 / COMPLETE X-Y-Z / BUS 0 / 0x69

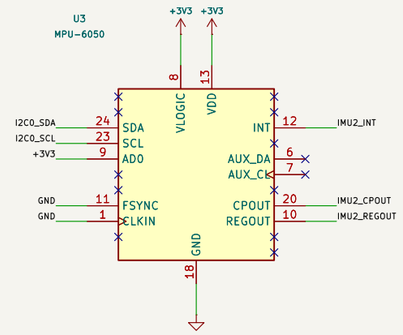


No center paste/pad. Reserved pins NC. All three packages share board axes.

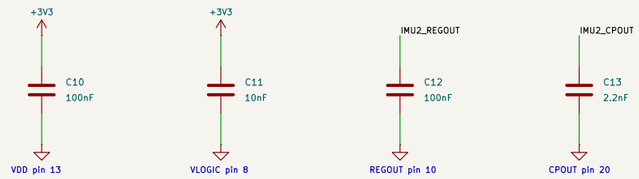


IMU 3 / COMPLETE X-Y-Z / BUS 1 / 0x68

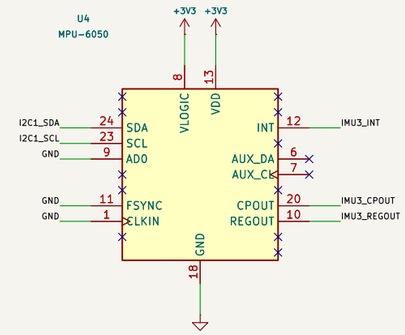

No center paste/pad. Reserved pins NC. All three packages share board axes.

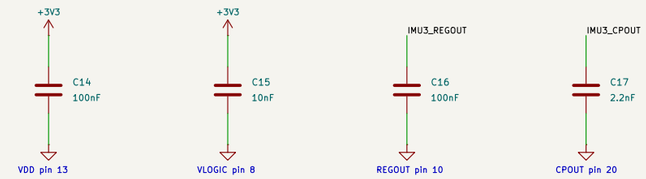


USB-C / 5V INPUT / 3.3V REGULATOR

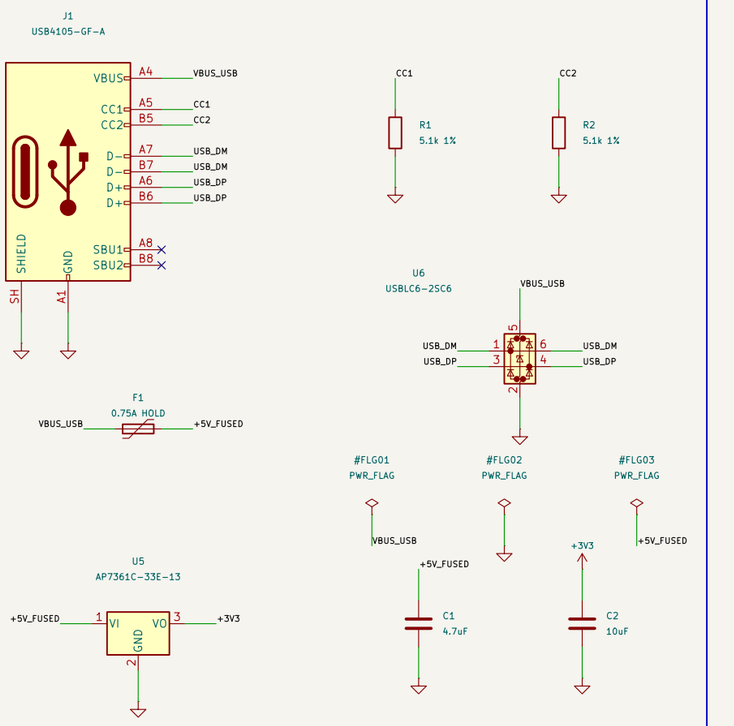

U5: pin 1 IN / pin 2 + tab GND / pin 3 OUT. Qualify thermal rise.

ESP32-S3-WROOM-1-N16R8 / NATIVE USB

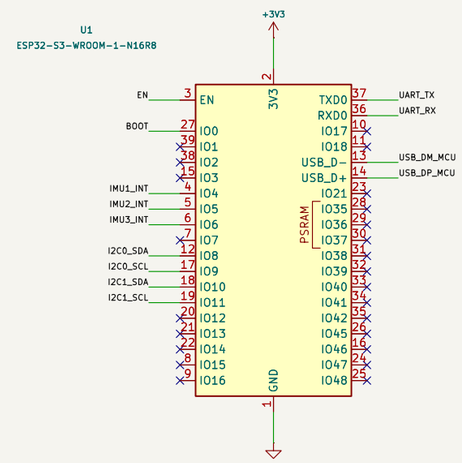


GPIO35/36/37 unused: reserved for module PSRAM.



GPIO19 = USB D-; GPIO20 = USB D+. Header TX/RX at 3.3V.

RESET / BOOT / I2C PULLUPS / USB DAMPING

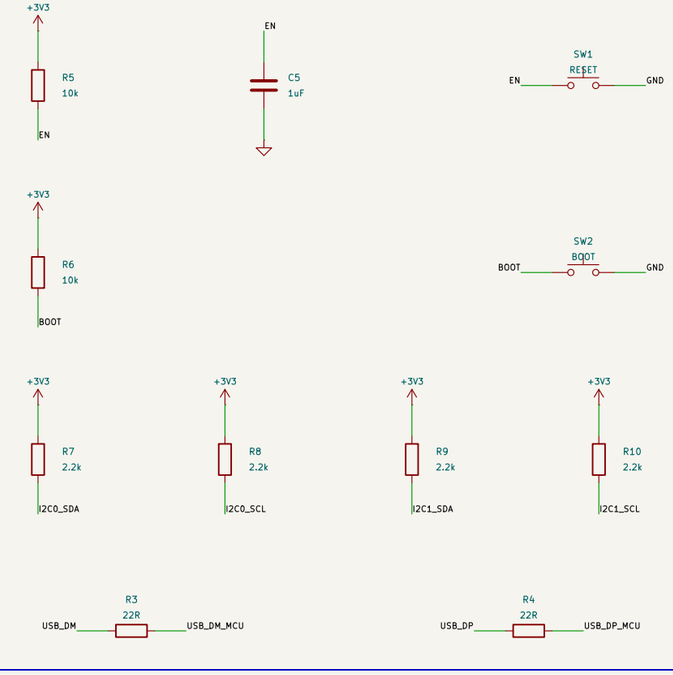

TEST POINTS / SIGNAL AND SUPPLY ACCESS



ESP32-S3-WROOM-1-N16R8 / three complete triaxial MPU-6050 ICs

Jan Clyde T. Talosig

Sheet: /

File: SHM_Node_R2.kicad_sch

Title: SHM Frequency Acquisition Node

Size: A3	Date: 2026-10-25	**Rev: R2 prototype**
KiCad E.D.A. 10.0.6		Id: 1/1