

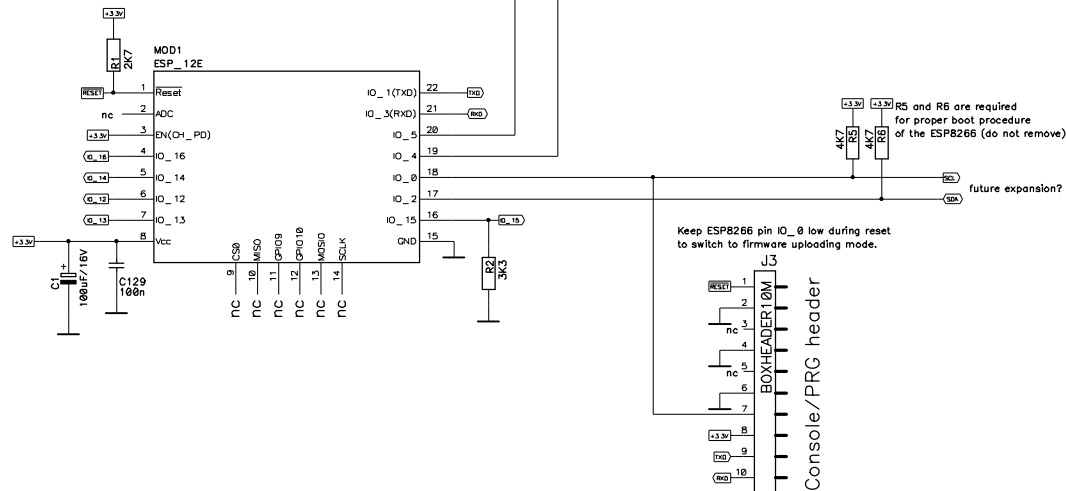
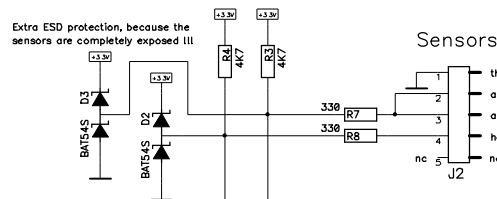
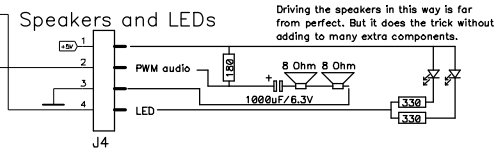


The value of D1 isn't important, as long as it can handle more current then the power supply can deliver.

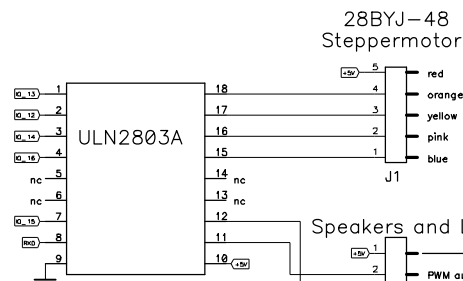

Keep ESP8266 pin IO_0 low during reset to switch to firmware uploading mode.



IO_3=I2S0_DATA (also RXD)
IO_2=I2S0_WS (must be high on powerup/reset)
IO_15=I2S0_BCK (must be low on reset/power-on)

Title Linear clock		
Size A2	Number	Rev 1
Date 2018	Drawn by J.Derogee	
Filename	Sheet	of