


A. One decision state in its ASE scene


35° vertical-FOV perspective; logged history, target OBB, and thinned candidates

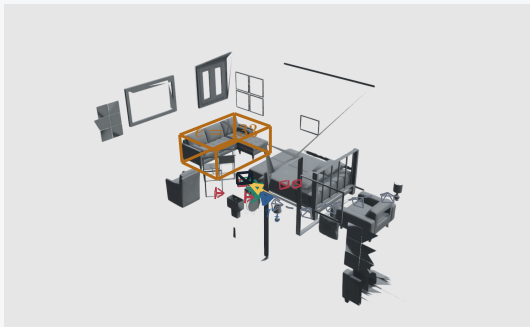

Dashed grey: logged history · green: valid examples · dashed red: clearance-rule rejections · black/gold: selected shell 47.

B. Full finite action set in bird's-eye view

orthographic 7.8 m-wide BEV; all centres retain shell identity and validity

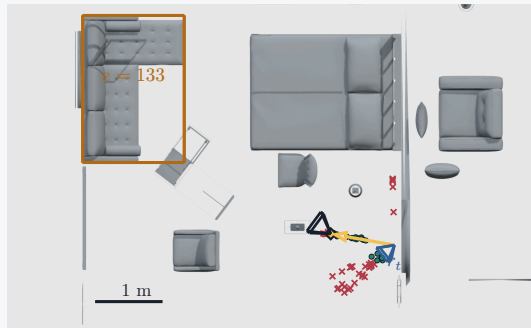

● 25 valid × 35 clearance-invalid ◆ shell 47 selected

Scene 81286, sample ASE_81286_Atek_000035, rollout row 73, step row 121 24 forward-local + 24 target-bearing

1. 12 lateral-bypass candidates. Dense mesh layers are

z-buffered raster; OBBs, paths, centres, and wire frusta remain vector geometry.