

# Exposé on Master's Thesis

Name: Jan Nalivaika  
 Matr. Nr.: 03694590  
 EMail: ga53pir@tum.de  
 Supervisor: Prof. Dr.-Ing. Michael F. Zäh  
 Institute: Institute for Machine Tools and Industrial Management  
 Title: Methodical Approach for Analyzing Process Parameters and Optimizing Boundary Conditions in Mutli-Axis Robot Programs  
 Date: October 23, 2023

---

## 1 Introduction and Motivation

In the age of "Industrie 4.0", advanced technologies like digital twins, have greatly transformed industrial manufacturing [61]. A considerable amount of data can be gathered from various processes, like milling or 3D printing. By analyzing this data, it is possible to find new and optimized methods for efficient manufacturing [24]. By doing so, a significant amount of resources, like time and money, can be saved while at the same time increasing the quality of the produced product [7, 60].

Computer-Aided Manufacturing (CAM) has been introduced as a crucial tool to improve productivity and accuracy in creating customized products [22]. CAM systems automate and optimize tasks such as machining, welding, and assembly [40]. One of the key strengths of CAM lies in its precision and consistency, ensuring that intricate components are produced with minimal error. Furthermore, CAM systems contribute to increased efficiency by minimizing material waste and reducing production time [21]. These capabilities play a significant role in achieving a carbon-neutral production process [56]. One of the most important areas of CAM is the calculation of the tool path in computer numerical control (CNC) machines as well as the movement and behavior of multi-axis industrial robots [50].

Manufacturing machines are the backbone of modern industrial processes [6]. These machines encompass a wide range of equipment, from CNC machining centers to 3D printers and automated assembly lines. Their primary ability lies in precision and efficiency. CNC machines, for instance, can repeatedly produce intricate parts with high accuracy, reducing human error and ensuring consistency [36].

Industrial robots are a dominant part in the area of manufacturing as they can perform multi-axis movements that are needed to fulfill the customers wishes for individualized products [58]. They are cheaper to acquire compared to CNC milling machines but have their own set of disadvantages [32]. One advantage is the wide adaptability. They allow for quick reconfiguration to produce different components or products, promoting flexibility in manufacturing [9]. Further, advancements in robotics and

artificial intelligence (AI) have broadened their capabilities, enabling tasks that were once deemed too complex or hazardous for humans [25].

Achieving efficiency and sustainability in the current fast-changing environment requires a thorough analysis of the interdependent relationships between the manufactured part, process parameters, and boundary conditions that govern multi-axis robot programs [50]. As the companies that work with industrial robots can place a strong emphasis on energy reduction, cost savings, or precision, optimizing these parameters is essential. CAM enables the simulation of the planned process, thus adapting any boundary conditions to fit the selected goals [39, 46]. This thesis is focused on a methodical approach for analyzing process parameters and optimizing boundary conditions in multi-axis robot programs [50].

## **2 State of Science and Technology**

The following chapter gives a brief introduction to the topics of manufacturing methods and CAM, as well as a first look into the available optimization methods for various process parameters.

### **2.1 Manufacturing Methods**

Manufacturing methods encompass a variety of techniques utilized to manufacture functional components and products. Two noteworthy approaches are subtractive and additive manufacturing [33]. Subtractive manufacturing, closely related to traditional machining, requires the removal of material from a solid workpiece to attain the desired shape [65]. This process typically employs cutting tools like drills and mills.

Additive manufacturing, or 3D printing, uses digital designs to build objects in layers. This technique provides remarkable design flexibility, minimizes material waste, and enables the creation of intricate geometries [16]. Subtractive and additive manufacturing methods have unique advantages and applications that make them indispensable in modern industrial processes. They play a significant role in the advancement of advanced manufacturing technologies [5, 63].

#### **2.1.1 Subtractive Manufacturing**

Milling is a sophisticated machining process that plays a central role in modern industrial production. It relies on the precision and automation of CNC technology to machine intricate shapes and components with precise accuracy [34]. A CNC milling machine, guided by computer programs, manipulates cutting tools to shape workpieces according to design specifications with tight tolerances. This technology facilitates the creation of high-precision parts and prototypes [4]. The integration of CNC technology and milling processes has pushed the era of manufacturing towards higher efficiency and the ability to realize increasingly complex and innovative designs [64].

### 2.1.2 Additive Manufacturing

Additive Manufacturing (AM), often referred to as 3D printing, stands in contrast to subtractive manufacturing processes like CNC milling. Instead of removing material to create a part, additive manufacturing builds objects layer by layer, adding material precisely where needed. This approach has opened up new possibilities in terms of design freedom, customization, and efficiency [54].

The Layer-by-Layer approach in AM encompasses various technologies like Fused Deposition Modeling (FDM), Stereolithography (SLA), and Selective Laser Sintering (SLS). This layering enables the creation of complex geometries that would be extremely challenging or impossible to produce using traditional methods [1]. A second advantage of AM is its compatibility with a wide range of materials, from plastics and metals to ceramics and even bio-materials [10]. This versatility allows for the production of components with diverse properties, including strength, flexibility, and heat resistance. One of the most significant advantages of AM is the freedom it offers in design. Traditional manufacturing methods often involve design constraints due to the limitations of tools and processes. With AM, designers have more creative liberty, which can lead to innovative and lightweight structures, improved functionality, and optimized performance [53]. Despite its many benefits, AM also presents challenges such as post-processing requirements (e.g., smoothing or heat treatment for some materials), limited material options for certain applications, and production speed for large or complex parts [16].

AM has found applications across numerous industries, including aerospace, healthcare, automotive, and consumer goods. As AM technologies advance, they have the potential to transform supply chains, enable distributed manufacturing, and redefine the approach of the creation of products and components [27].

### 2.1.3 Computer-Aided Manufacturing

CAM is used to automatically generate tool paths for CNC machines [18, 22]. The CAM software considers the models of the raw and finished part as well as the constraints of the machine, the tools, and the manufacturing technology. Together with user-configurable parameters, tool paths for 3-axis, 5-axis, and robot-based machine tools are generated [48]. The growing demand for flexibility in machine tools, such as the use of multiple manufacturing technologies in one machine or automated loading and unloading, has led to many machine tools being equipped with additional mechanical axes [42, 44]. Examples include robots mounted on linear axes and rotary-tilt tables. The tool paths created in CAM programs are usually defined by five degrees of freedom. The first three are the translational axes X, Y, and Z. The tilting and inclining of the tool are defined by the A- and B-axes. Occasionally, an additional rotation of the tool (C-axis) around the Z-axis (e.g., for dragging a swivel knife) is defined [66]. Machines with more degrees of freedom than those limited by the tool-path often need user-defined constraints [50]. These constraints are necessary to fully specify the movements of the machine axes. An example is the alignment of a part using the rotary-tilt table so that the Z-axis of the tool always points in the direction of gravity. This is helpful in processes like fused deposition modeling (FDM) and wire arc additive manufacturing (WAAM). It is common practice to set the user-defined constraints based on experience. A preliminary literature review indicates that the configuration of these degrees of freedom has an impact on the energy demand and stability of the process [15, 29, 51, 52].

#### 2.1.4 CNC Machining

CNC machines is essential in modern machining and has revolutionized manufacturing. At its core, CNC uses computers to control machining tools and equipment, resulting in increased precision, efficiency, and repeatability in manufacturing processes, especially milling. CNC machining relies on precise instructions programmed into a computer [3]. These instructions, frequently developed utilizing Computer-Aided Design (CAD) software, delineates the necessary movement, tool alteration, and parameter adjustment for the machining procedure [38]. This automation level guarantees precise and consistent results, eliminating human error and enabling the production of complex and highly detailed parts.

G-code [17] is a set of commands and coordinates that provide direction to the CNC machine. It specifies tool-paths, tool changes, and spindle speeds, among other parameters, and is generated by CAM software from 3D CAD models, taking into account tool-paths, speeds, feeds, and other parameters [14]. The CNC controller interprets the G-code instructions and translates them into precise movements and tool actions. It serves as a mediator between the computer program and the physical machining equipment [2]. CNC technology is highly versatile, encompassing not only milling but also a range of machining processes such as waterjet cutting or electrical discharge machining. Its uses span various industries, including aerospace, automotive manufacturing, medical device fabrication, and custom prototyping.

## 2.2 Industrial Robots

Industrial robots are crucial to modern manufacturing and automation, transforming production methods and repetitive task performance across diverse industries. Since their inception in the mid-20th century, these machines have undergone significant advancements, evolving into highly adaptive and sophisticated devices that promote productivity, accuracy, and safety within manufacturing processes [35]. At their core, industrial robots are programmable machines designed to execute tasks with a high degree of accuracy and efficiency. They can carry out repetitive actions consistently, which enhances productivity and reduces the risk of human error [59].

One key aspect in industrial robotics is the continuous path mode, which enables robots to smoothly and continuously follow a path that deviates from the set way points [13]. This feature is especially interesting in areas where the path of a tool is rapidly changing its direction and would require significant moments and forces to reach all set way points during a continuous motion. This feature is helpful for improvement fluidity of the movement as well as energy reduction. In applications such as welding or painting, significant velocity changes result in parts that are manufactured not to the desired specification [8].

The robots performance relies on sophisticated control algorithms and feedback systems that allow them to adapt to dynamic conditions, adjust movements in real-time, and maintain a consistently high level of accuracy [45]. This improves both the quality of the final product and the safety of the manufacturing process, as robots can navigate complex paths without risking collisions or accidents [11]. As technology continues to advance, industrial robots will play an even more prominent role in shaping the future of manufacturing and automation [20].

### 2.3 Process Parameters in WAAM

Wire Arc Additive Manufacturing (WAAM) is an additive manufacturing process that uses an industrial robot combined with a welding machine to deposit metal material layer by layer to build up a three-dimensional object [55]. Process parameters in WAAM are critical for achieving the desired quality and properties in the final product [19].

In simple terms, the amount of electrical current and voltage supplied to the welding arc affects the heat input and melting rate. Adjusting the welding current can control the size and penetration depth of the weld bead [62]. In a more detailed view, Cold Metal Transfer (CMT) technology, has a substantial number of parameters that can be tuned to achieve a desired result [57].

The rate at which the filler wire is fed into the weld pool influences the deposition rate and the size of the weld bead. Proper wire feed is essential for maintaining a uniform weld. Optimizing these process parameters is essential for achieving the desired mechanical properties, surface finish, and dimensional accuracy in WAAM-produced parts. Fine-tuning these parameters may require experimentation and monitoring to ensure consistent and high-quality results [47].

In the context of WAAM with industrial robots, various robot-specific parameters and considerations play a crucial role in the overall process. The type and model of the industrial robot being used can impact the range of motion, payload capacity, and precision. The robot's kinematic configuration, such as whether it's a Cartesian, articulated, or other type, affects its ability to reach different areas of the workpiece. Controlling the robot's speed and acceleration during deposition and tool-path execution is essential for maintaining precision [30].

Especially in situations with more degrees of freedom than required, as described in chapter 2.1.3, setting the right process parameters can significantly influence the process. Table 1 gives an overview of the parameters that can be influenced by setting different boundary conditions.

Singularity avoidance [31]	Joint accelerations [23]
Joint jerks [23]	Extension
Energy use [51]	Direction changes [26]
Transfer time [29]	Precision [52]
Maximum load capacity [12]	Stiffness [15]

**Table 1:** Areas of influence of boundary conditions and process parameters

These robot-specific parameters and considerations are essential for achieving the desired precision, quality, and efficiency in WAAM processes. Integrating the robot effectively into the manufacturing system and optimizing its parameters are key factors for efficient and precise production.

## 2.4 Comparison of Available Process Optimization Methods

As mentioned in chapter 2.1.3, one of the most simple approaches is to define the configuration of the robot manually. These settings are mostly based on experience and intuition and are not quantified numerically. Additionally, multiple iterations can be necessary to find the right settings [50].

Processes like spot welding can be regarded as a travelling salesman problem. As of now, no CAM software is currently able to optimally solve this problem and optimize for a fast cycle time [50]. To solve this problem, a genetic algorithm is proposed in [37].

One of the more analyzed areas is the reduction of energy use [28, 43]. When the number of actuators (degrees of freedom) exceeds the available degrees of freedom in the motion of the end-effector, the end-effector path does not fully determine the trajectories of all individual degrees of freedom. This redundancy can be leveraged to optimize performance, such as in reducing maneuvering time. Control theory is employed to determine the ideal allocation of motion across the actuators while considering physical constraints for a given path of the end-effector. The simulation results demonstrate a substantial decrease in energy consumption [28].

Another approach discusses parallel mechanisms. They have advantages such as fast motion and the ability to carry heavier payloads compared to serial mechanisms. One method to overcome singularity configurations is to use redundantly actuated parallel mechanisms (RAPMs), which have more actuators than the kinematic degrees of freedom. This feature can be used for applications like active stiffness enhancement, backlash elimination, and motion generation. It is investigated how RAPMs can increase energy efficiency by distributing actuating torques optimally. Comparing the energy consumption of a RAPM and a non-redundantly actuated mechanism for the same pathway, it is shown that a RAPM can consume less energy with proper torque distribution [41].

A different study aims to minimize energy consumption during pick-and-place operations by optimizing motion planning. The research uses a PID controller for optimal parameters and fine-tunes them using metaheuristic algorithms like Genetic Algorithms and Particle Swarm Optimization. The results show that the combination of these approaches improves compatibility in terms of execution time and energy efficiency. Experiments conducted on a dual-arm robot validate the feasibility of the algorithms. Combining robot configuration with metaheuristic approaches leads to energy and time savings compared to using PID controllers alone for motion planning [49].

### 3 Objective of the Thesis

The definition of the redundant constraints, mentioned in chapter 2.1.3, does not affect the relative tool path as generated by the CAM software. As such, a methodical approach to optimize these constraints, without altering the toolpath, in terms of efficiency, speed, and energy demand of the machine is required. Currently, no literature provides a comprehensive analysis or methodology regarding this global optimization problem. This work aims to attain a methodical approach that analyzes a set of constraints and evaluates the influence of those constraints on a set of defined process variables. It will focus on a 6-axis robot with a rotary-tilt table, whereby the results should also be transferable to other machines. Furthermore, the experiments and validations will be limited to the manufacturing processes of WAAM and milling.

First, the influence of the constraints on relevant process variables (energy demand, joint turnover, speed and acceleration peaks, total joint movements) in a manufacturing process such as WAAM will be assessed. Subsequently, a process evaluation will be elaborated in the CAM software, by means of which the process quality can be determined. Depending on the respective process variables, approximation methods or machine learning methods will be investigated for the process evaluation. The process quality as a one-dimensional variable will be determined by weighting the process variables. Subsequently, a method for the optimization of the constraints will be elaborated. This task corresponds to an optimization problem in which the process quality will be maximized by selecting suitable constraints.


### 4 Work Plan and necessary Resources

The research project started on the 02.10.2023 and ends on the 29.03.2024. The developed method is to be validated on an industrial robot provided by Siemens. For that, the required software (Siemens NX) and hardware is necessary. Access and training for the equipment are provided by the industry supervisor Marius Breuer. Additionally, weekly meetings are scheduled with the university supervisor Ludwig Siebert. In the weekly meetings, a short update regarding the progress of the passed week and next weeks' outlook presented.

For a better structure of the thesis, a set of predefined points is agreed upon:

1. Literature research
2. Familiarization with WAAM and milling machines
3. Familiarization with CAM-software
4. Selection of suitable process parameters
5. Development of the proposed method in a suitable programming language
6. Verification and validation of the developed method
7. Documentation of the work

Figure 1 gives a visual overview of a proposed time structure. The expected start and end of the work packages (WP) as well as their sub points are shown in a Gantt chart. To avoid running into time issues in the last weeks of the writing process, the self-defined deadlines are set four weeks prior to the actual deadline of the thesis. A possible publication of the developed method can be worked on in the last three weeks.

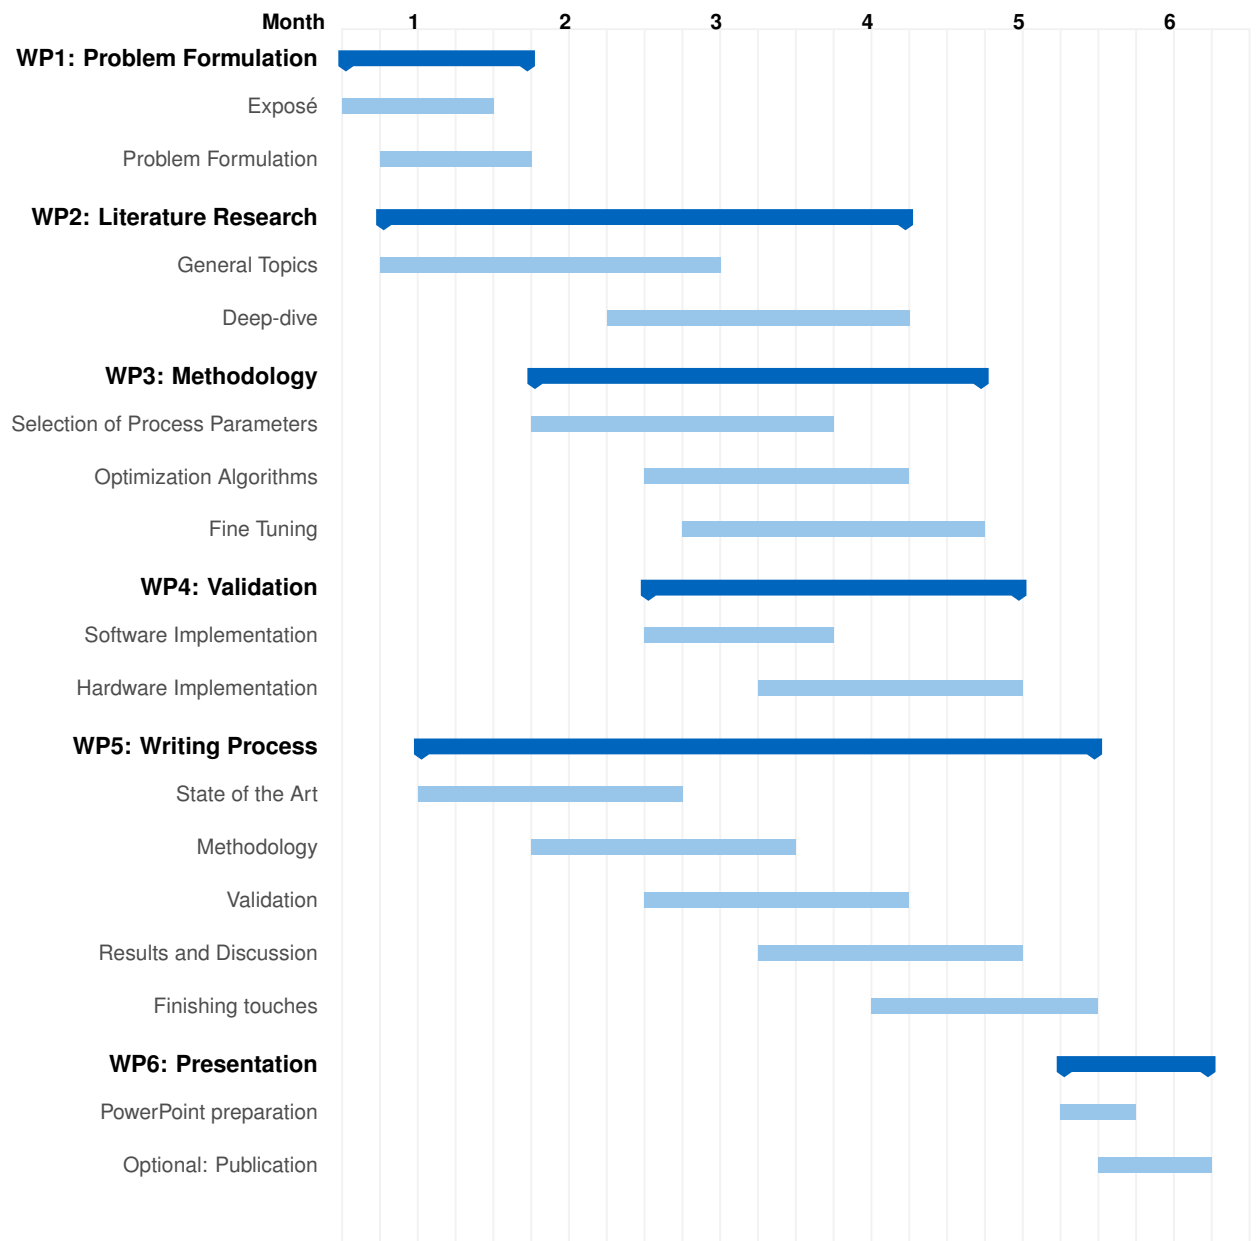

**Figure 1:** Time schedule.



## 5 Literature

- [1] Abdulhameed, O., Al-Ahmari, A., Ameen, W., and Mian, S. H. "Additive manufacturing: Challenges, trends, and applications". In: *Advances in Mechanical Engineering* 11.2 (2019). DOI: [10.1177/1687814018822880](https://doi.org/10.1177/1687814018822880).
- [2] Adam, A., Sam, T.-H., Latif, K., Yusof, Y., Khan, Z., Ali Memon, D., Saif, Y., Hatem, N., Iliyas Ahmed, M., and Abdul Kadir, A. Z. "Review on Advanced CNC Controller for Manufacturing in Industry 4.0". In: *Enabling Industry 4.0 through Advances in Manufacturing and Materials*. Springer, Singapore, 2022, pp. 261–269. DOI: [10.1007/978-981-19-2890-1\\_26](https://doi.org/10.1007/978-981-19-2890-1_26). URL: [https://link.springer.com/chapter/10.1007/978-981-19-2890-1\\_26](https://link.springer.com/chapter/10.1007/978-981-19-2890-1_26).
- [3] Altintas, Y. and Ber, A. A. "Manufacturing Automation: Metal Cutting Mechanics, Machine Tool Vibrations, and CNC Design". In: *Applied Mechanics Reviews* 54.5 (2001), B84–B84. ISSN: 0003-6900. DOI: [10.1115/1.1399383](https://doi.org/10.1115/1.1399383).
- [4] Amanullah, A., Murshiduzzaman, Saleh, T., and Khan, R. "Design and Development of a Hybrid Machine Combining Rapid Prototyping and CNC Milling Operation". In: *1877-7058* 184 (2017), pp. 163–170. ISSN: 1877-7058. DOI: [10.1016/j.proeng.2017.04.081](https://doi.org/10.1016/j.proeng.2017.04.081).
- [5] Bandyopadhyay, A. *Additive Manufacturing, Second Edition*. 2nd ed. Milton: Taylor & Francis Group, 2020. ISBN: 9780429881022.
- [6] Bi, Z. and Wang, X. *Computer aided design and manufacturing*. 1st edition. Wiley-ASME press series. Hoboken, New Jersey and West Sussex, England: Wiley and ASME Press, 2020. ISBN: 9781119534211.
- [7] Bibby, L. and Dehe, B. "Defining and assessing industry 4.0 maturity levels – case of the defence sector". In: *Production Planning & Control* 29.12 (2018), pp. 1030–1043. DOI: [10.1080/09537287.2018.1503355](https://doi.org/10.1080/09537287.2018.1503355).
- [8] Bigliardi, M., Bilancia, P., Raffaelli, R., Peruzzini, M., Berselli, G., and Pellicciari, M. "Path Approximation Strategies for Robot Manufacturing: A Preliminary Experimental Evaluation". In: *Advances on Mechanics, Design Engineering and Manufacturing IV*. Ed. by Gerbino, S., Lanzotti, A., Martorelli, M., Mirálses Buil, R., Rizzi, C., and Roucoules, L. Lecture Notes in Mechanical Engineering. Cham: Springer International Publishing and Imprint: Springer, 2023, pp. 380–389. ISBN: 978-3-031-15927-5. DOI: [10.1007/978-3-031-15928-2\\_33](https://doi.org/10.1007/978-3-031-15928-2_33).
- [9] Billard, A. and Kragic, D. "Trends and challenges in robot manipulation". In: *Science* 364.6446 (2019). DOI: [10.1126/science.aat8414](https://doi.org/10.1126/science.aat8414).
- [10] Bose, S., Ke, D., Sahasrabudhe, H., and Bandyopadhyay, A. "Additive manufacturing of bio-materials". In: *Progress in materials science* 93 (2018), pp. 45–111. ISSN: 0079-6425. DOI: [10.1016/j.pmatsci.2017.08.003](https://doi.org/10.1016/j.pmatsci.2017.08.003).
- [11] Bosscher, P. and Hedman, D. "Real-time collision avoidance algorithm for robotic manipulators". In: *Industrial Robot: An International Journal* 38.2 (2011), pp. 186–197. DOI: [10.1108/01439911111106390](https://doi.org/10.1108/01439911111106390). URL: <https://www.emerald.com/insight/content/doi/10.1108/01439911111106390/full/pdf>.

- [12] Breaz, R. E., Bologa, O., and Racz, S. G. "Selecting industrial robots for milling applications using AHP". In: *1877-0509* 122 (2017), pp. 346–353. ISSN: 1877-0509. DOI: [10.1016/j.procs.2017.11.379](https://doi.org/10.1016/j.procs.2017.11.379). URL: <https://www.sciencedirect.com/science/article/pii/S1877050917326224>.
- [13] Chen, S.-y., Zhang, T., and Zou, Y.-b. "Fuzzy-Sliding Mode Force Control Research on Robotic Machining". In: *Journal of Robotics* 2017 (2017), pp. 1–8. ISSN: 1687-9600. DOI: [10.1155/2017/8128479](https://doi.org/10.1155/2017/8128479).
- [14] *CNC KNOWLEDGE: Last access: 12.10.2023*. 2023. URL: <https://www.cncknowledge.in/2020/05/haas-cnc-g-code-list-for-lathe-milling.html>.
- [15] Cvitanic, T., Nguyen, V., and Melkote, S. N. "Pose optimization in robotic machining using static and dynamic stiffness models". In: *Robotics and Computer-Integrated Manufacturing* 66 (2020), p. 101992. ISSN: 0736-5845. DOI: [10.1016/j.rcim.2020.101992](https://doi.org/10.1016/j.rcim.2020.101992). URL: <https://www.sciencedirect.com/science/article/pii/S0736584520302039>.
- [16] Dilberoglu, U. M., Gharehpapagh, B., Yaman, U., and Dolen, M. "The Role of Additive Manufacturing in the Era of Industry 4.0". In: *Procedia Manufacturing* 11 (2017), pp. 545–554. ISSN: 2351-9789. DOI: [10.1016/j.promfg.2017.07.148](https://doi.org/10.1016/j.promfg.2017.07.148). URL: <https://www.sciencedirect.com/science/article/pii/S2351978917303529>.
- [17] "DIN 66025-1:1983-01, Programmaufbau für numerisch gesteuerte Arbeitsmaschinen; Allgemeines". In: (1983). DOI: [10.31030/1300778](https://doi.org/10.31030/1300778).
- [18] Ding, S. and Jiang, R. "Tool path generation for 4-axis contour EDM rough machining". In: *International Journal of Machine Tools and Manufacture* 44.14 (2004), pp. 1493–1502. ISSN: 0890-6955. DOI: [10.1016/j.ijmachtools.2004.05.010](https://doi.org/10.1016/j.ijmachtools.2004.05.010). URL: <https://www.sciencedirect.com/science/article/pii/S0890695504001269>.
- [19] Dinovitzer, M., Chen, X., Laliberte, J., Huang, X., and Frei, H. "Effect of wire and arc additive manufacturing (WAAM) process parameters on bead geometry and microstructure". In: *Additive Manufacturing* 26 (2019), pp. 138–146. ISSN: 2214-8604. DOI: [10.1016/j.addma.2018.12.013](https://doi.org/10.1016/j.addma.2018.12.013). URL: <https://www.sciencedirect.com/science/article/pii/S2214860418306286>.
- [20] Domae, Y. "Recent Trends in the Research of Industrial Robots and Future Outlook". In: *Journal of Robotics and Mechatronics* 31.1 (2019), pp. 57–62. ISSN: 1883-8049. DOI: [10.20965/jrm.2019.p0057](https://doi.org/10.20965/jrm.2019.p0057). URL: [https://www.jstage.jst.go.jp/article/jrobomech/31/1/31\\_57/\\_article/-char/ja/](https://www.jstage.jst.go.jp/article/jrobomech/31/1/31_57/_article/-char/ja/).
- [21] Dubovska, R., Jambor, J., and Majerik, J. "Implementation of CAD/CAM System CATIA V5 in Simulation of CNC Machining Process". In: *1877-7058* 69 (2014), pp. 638–645. ISSN: 1877-7058. DOI: [10.1016/j.proeng.2014.03.037](https://doi.org/10.1016/j.proeng.2014.03.037). URL: <https://www.sciencedirect.com/science/article/pii/S1877705814002835>.
- [22] Feldhausen, T., Heinrich, L., Saleeby, K., Burl, A., Post, B., MacDonald, E., Saldana, C., and Love, L. "Review of Computer-Aided Manufacturing (CAM) strategies for hybrid directed energy deposition". In: *Additive Manufacturing* 56 (2022), p. 102900. ISSN: 2214-8604. DOI: [10.1016/j.addma.2022.102900](https://doi.org/10.1016/j.addma.2022.102900).

- [23] Gasparetto, A. and Zanotto, V. "Optimal trajectory planning for industrial robots". In: *Advances in Engineering Software* 41.4 (2010), pp. 548–556. ISSN: 0965-9978. DOI: [10.1016/j.advengsoft.2009.11.001](https://doi.org/10.1016/j.advengsoft.2009.11.001). URL: <https://www.sciencedirect.com/science/article/pii/S0965997809002464>.
- [24] Ghobakhloo, M. "Industry 4.0, digitization, and opportunities for sustainability". In: *Journal of Cleaner Production* 252 (2020), p. 119869. ISSN: 0959-6526. DOI: [10.1016/j.jclepro.2019.119869](https://doi.org/10.1016/j.jclepro.2019.119869). URL: <https://www.sciencedirect.com/science/article/pii/S0959652619347390>.
- [25] Goel, R. and Gupta, P. "Robotics and Industry 4.0". In: *A Roadmap to Industry 4.0: Smart Production, Sharp Business and Sustainable Development*. Springer, Cham, 2020, pp. 157–169. DOI: [10.1007/978-3-030-14544-6\\_textunderscore}9](https://doi.org/10.1007/978-3-030-14544-6_textunderscore}9). URL: [https://link.springer.com/chapter/10.1007/978-3-030-14544-6\\_9](https://link.springer.com/chapter/10.1007/978-3-030-14544-6_9).
- [26] Halbauer, M., Lehmann, C., Stadter, J. P., Berger, U., and Leali, F. "Milling strategies optimized for industrial robots to machine hard materials". In: *2013 IEEE 18th Conference on Emerging Technologies & Factory Automation (ETFA)*. IEEE, 2013. DOI: [10.1109/etfa.2013.6648124](https://doi.org/10.1109/etfa.2013.6648124).
- [27] Haleem, A. and Javaid, M. "Additive Manufacturing Applications in Industry 4.0: A Review". In: *Journal of Industrial Integration and Management* 04.04 (2019), p. 1930001. ISSN: 2424-8622. DOI: [10.1142/S2424862219300011](https://doi.org/10.1142/S2424862219300011).
- [28] Halevi, Y., Carpanzano, E., Montalbano, G., and Koren, Y. "Minimum energy control of redundant actuation machine tools". In: *CIRP Annals* 60.1 (2011), pp. 433–436. ISSN: 00078506. DOI: [10.1016/j.cirp.2011.03.032](https://doi.org/10.1016/j.cirp.2011.03.032).
- [29] Hirzinger, G., Bals, J., Otter, M., and Stelter, J. *The DLR-KUKA Success Story*. Vol. 12. 2005. DOI: [10.1109/MRA.2005.1511865](https://doi.org/10.1109/MRA.2005.1511865).
- [30] Hsiao, J.-C., Shivam, K., Lu, I.-F., and Kam, T.-Y. "Positioning Accuracy Improvement of Industrial Robots Considering Configuration and Payload Effects Via a Hybrid Calibration Approach". In: *IEEE Access* 8 (2020), pp. 228992–229005. ISSN: 2169-3536. DOI: [10.1109/access.2020.3045598](https://doi.org/10.1109/access.2020.3045598).
- [31] Huo, L. and Baron, L. "The joint-limits and singularity avoidance in robotic welding". In: *Industrial Robot: An International Journal* 35.5 (2008). DOI: [10.1108/01439910810893626](https://doi.org/10.1108/01439910810893626). URL: <https://www.emerald.com/insight/content/doi/10.1108/01439910810893626/full/pdf>.
- [32] Iglesias, I., Sebastián, M. A., and Ares, J. E. "Overview of the State of Robotic Machining: Current Situation and Future Potential". In: *1877-7058* 132 (2015), pp. 911–917. ISSN: 1877-7058. DOI: [10.1016/j.proeng.2015.12.577](https://doi.org/10.1016/j.proeng.2015.12.577). URL: <https://www.sciencedirect.com/science/article/pii/S1877705815044896>.
- [33] Iqbal, A., Zhao, G., Suhaimi, H., He, N., Hussain, G., and Zhao, W. "Readiness of subtractive and additive manufacturing and their sustainable amalgamation from the perspective of Industry 4.0: a comprehensive review". In: *The International Journal of Advanced Manufacturing Technology* 111.9-10 (2020), pp. 2475–2498. ISSN: 1433-3015. DOI: [10.1007/s00170-020-06287-6](https://doi.org/10.1007/s00170-020-06287-6). URL: <https://link.springer.com/article/10.1007/s00170-020-06287-6>.

- [34] Jayawardane, H., Davies, I. J., Gamage, J. R., John, M., and Biswas, W. K. "Sustainability perspectives – a review of additive and subtractive manufacturing". In: *Sustainable Manufacturing and Service Economics* 2 (2023), p. 100015. ISSN: 2667-3444. DOI: [10.1016/j.smse.2023.100015](https://doi.org/10.1016/j.smse.2023.100015).
- [35] Ji, W. and Wang, L. "Industrial robotic machining: a review". In: *The International Journal of Advanced Manufacturing Technology* 103.1-4 (2019), pp. 1239–1255. ISSN: 1433-3015. DOI: [10.1007/s00170-019-03403-z](https://doi.org/10.1007/s00170-019-03403-z). URL: <https://link.springer.com/article/10.1007/s00170-019-03403-z>.
- [36] Jia, Z.-y., Ma, J.-w., Song, D.-n., Wang, F.-j., and Liu, W. "A review of contouring-error reduction method in multi-axis CNC machining". In: *International Journal of Machine Tools and Manufacture* 125 (2018), pp. 34–54. ISSN: 0890-6955. DOI: [10.1016/j.ijmachtools.2017.10.008](https://doi.org/10.1016/j.ijmachtools.2017.10.008).
- [37] Kim, K.-Y., Kim, D.-W., and Nnaji, B. O. "Robot arc welding task sequencing using genetic algorithms". In: *IIE Transactions* 34.10 (2002), pp. 865–880. ISSN: 1573-9724. DOI: [10.1023/A:1015732825817](https://doi.org/10.1023/A:1015732825817). URL: <https://link.springer.com/article/10.1023/a:1015732825817>.
- [38] Klancnik, S., Brezocnik, M., and Balic, J. "Intelligent CAD/CAM System for Programming of CNC Machine Tools". In: *International Journal of Simulation Modelling* 15.1 (2016), pp. 109–120. ISSN: 1726-4529. DOI: [10.2507/ijsimm15\(1\)9.330](https://doi.org/10.2507/ijsimm15(1)9.330).
- [39] Kyratsis, P., Kakoulis, K., and Markopoulos, A. P. "Advances in CAD/CAM/CAE Technologies". In: *Machines* 8.1 (2020), p. 13. ISSN: 2075-1702. DOI: [10.3390/machines8010013](https://doi.org/10.3390/machines8010013). URL: <https://www.mdpi.com/2075-1702/8/1/13/html>.
- [40] Lalit Narayan, K., Mallikarjuna Rao, K., and Sarcar, M. M. M. *Computer aided design and manufacturing*. Second printing. Delhi: PHI Learning Private Limited, 2013. ISBN: 9788120333420.
- [41] Lee, G., Park, S., Lee, D., Park, F. C., Jeong, J. I., and Kim, J. "Minimizing Energy Consumption of Parallel Mechanisms via Redundant Actuation". In: *IEEE/ASME Transactions on Mechatronics* 20.6 (2015), pp. 2805–2812. ISSN: 1083-4435. DOI: [10.1109/TMECH.2015.2401606](https://doi.org/10.1109/TMECH.2015.2401606).
- [42] Lee, J.-D., Tsai-Lin, C.-W., Lee, Y.-C., Liu, M.-C., and Chen, L.-Y. "Fully automatic CNC machining production system". In: *MATEC Web of Conferences* 108 (2017), p. 04002. ISSN: 2261-236X. DOI: [10.1051/matecconf/201710804002](https://doi.org/10.1051/matecconf/201710804002).
- [43] Li, C., Tang, Y., Cui, L., and Li, P. "A quantitative approach to analyze carbon emissions of CNC-based machining systems". In: *Journal of Intelligent Manufacturing* 26.5 (2015), pp. 911–922. ISSN: 0956-5515. DOI: [10.1007/s10845-013-0812-4](https://doi.org/10.1007/s10845-013-0812-4).
- [44] Li, Y., Lee, C.-H., and Gao, J. "From computer-aided to intelligent machining: Recent advances in computer numerical control machining research". In: *Proceedings of the Institution of Mechanical Engineers, Part B: Journal of Engineering Manufacture* 229.7 (2015), pp. 1087–1103. ISSN: 0954-4054. DOI: [10.1177/0954405414560622](https://doi.org/10.1177/0954405414560622).
- [45] Lin, Y., Zhao, H., and Ding, H. "Real-time path correction of industrial robots in machining of large-scale components based on model and data hybrid drive". In: *Robotics and Computer-Integrated Manufacturing* 79 (2023), p. 102447. ISSN: 0736-5845. DOI: [10.1016/j.rcim.2022.102447](https://doi.org/10.1016/j.rcim.2022.102447). URL: <https://www.sciencedirect.com/science/article/pii/S0736584522001302>.

- [46] Maiti, C. K. *Introducing technology computer-aided design (TCAD): Fundamentals, simulations and applications*. Temasek Boulevard, Singapore: Pan Stanford Publishing, 2017. ISBN: 9789814745529.
- [47] Müller, J., Grabowski, M., Müller, C., Hensel, J., Unglaub, J., Thiele, K., Kloft, H., and Dilger, K. "Design and Parameter Identification of Wire and Arc Additively Manufactured (WAAM) Steel Bars for Use in Construction". In: *Metals* 9.7 (2019), p. 725. ISSN: 2075-4701. DOI: [10.3390/met9070725](https://doi.org/10.3390/met9070725). URL: <https://www.mdpi.com/2075-4701/9/7/725>.
- [48] Nee, A. Y. C. *Handbook of Manufacturing Engineering and Technology*. 1st ed. 2015. London: Springer London and Imprint: Springer, 2015. ISBN: 978-1-4471-4669-8. DOI: [10.1007/978-1-4471-4670-4](https://doi.org/10.1007/978-1-4471-4670-4).
- [49] Nonoyama, K., Liu, Z., Fujiwara, T., Alam, M. M., and Nishi, T. "Energy-Efficient Robot Configuration and Motion Planning Using Genetic Algorithm and Particle Swarm Optimization". In: *Energies* 15.6 (2022), p. 2074. ISSN: 1996-1073. DOI: [10.3390/en15062074](https://doi.org/10.3390/en15062074).
- [50] Pan, Z., Polden, J., Larkin, N., van Duin, S., and Norrish, J. "Recent progress on programming methods for industrial robots". In: *Robotics and Computer-Integrated Manufacturing* 28.2 (2012), pp. 87–94. ISSN: 0736-5845. DOI: [10.1016/j.rcim.2011.08.004](https://doi.org/10.1016/j.rcim.2011.08.004). URL: <https://www.sciencedirect.com/science/article/pii/S0736584511001001>.
- [51] Paryanto, Brossog, M., Bornschlegl, M., and Franke, J. "Reducing the energy consumption of industrial robots in manufacturing systems". In: *The International Journal of Advanced Manufacturing Technology* 78.5-8 (2015), pp. 1315–1328. ISSN: 1433-3015. DOI: [10.1007/s00170-014-6737-z](https://doi.org/10.1007/s00170-014-6737-z). URL: <https://link.springer.com/article/10.1007/s00170-014-6737-z>.
- [52] Pham, A.-D. and Ahn, H.-J. "High Precision Reducers for Industrial Robots Driving 4th Industrial Revolution: State of Arts, Analysis, Design, Performance Evaluation and Perspective". In: *International Journal of Precision Engineering and Manufacturing-Green Technology* 5.4 (2018), pp. 519–533. ISSN: 2198-0810. DOI: [10.1007/s40684-018-0058-x](https://doi.org/10.1007/s40684-018-0058-x). URL: <https://link.springer.com/article/10.1007/s40684-018-0058-x>.
- [53] Plocher, J. and Panesar, A. "Review on design and structural optimisation in additive manufacturing: Towards next-generation lightweight structures". In: *Materials & Design* 183 (2019), p. 108164. ISSN: 02641275. DOI: [10.1016/j.matdes.2019.108164](https://doi.org/10.1016/j.matdes.2019.108164).
- [54] Prakash, K. S., Nancharaih, T., and Rao, V. S. "Additive Manufacturing Techniques in Manufacturing -An Overview". In: *Materials Today: Proceedings* 5.2 (2018), pp. 3873–3882. ISSN: 2214-7853. DOI: [10.1016/j.matpr.2017.11.642](https://doi.org/10.1016/j.matpr.2017.11.642). URL: <https://www.sciencedirect.com/science/article/pii/S2214785317329152>.
- [55] Rodrigues, T. A., Duarte, V., Miranda, R. M., Santos, T. G., and Oliveira, J. P. "Current Status and Perspectives on Wire and Arc Additive Manufacturing (WAAM)". In: *Materials* 12.7 (2019), p. 1121. ISSN: 1996-1944. DOI: [10.3390/ma12071121](https://doi.org/10.3390/ma12071121). URL: <https://www.mdpi.com/1996-1944/12/7/1121>.

- [56] Saxena, P., Stavropoulos, P., Kechagias, J., and Salonitis, K. "Sustainability Assessment for Manufacturing Operations". In: *Energies* 13.11 (2020), p. 2730. ISSN: 1996-1073. DOI: [10.3390/en13112730](https://doi.org/10.3390/en13112730). URL: <https://www.mdpi.com/1996-1073/13/11/2730>.
- [57] Selvi, S., Vishvakshen, A., and Rajasekar, E. "Cold metal transfer (CMT) technology - An overview". In: *2214-9147* 14.1 (2018), pp. 28–44. ISSN: 2214-9147. DOI: [10.1016/j.dt.2017.08.002](https://doi.org/10.1016/j.dt.2017.08.002). URL: <https://www.sciencedirect.com/science/article/pii/S2214914717301022>.
- [58] Sherwani, F., Asad, M. M., and Ibrahim, B. "Collaborative Robots and Industrial Revolution 4.0 (IR 4.0)". In: *2020 International Conference on Emerging Trends in Smart Technologies (ICETST)*. IEEE, 2020. DOI: [10.1109/icetst49965.2020.9080724](https://doi.org/10.1109/icetst49965.2020.9080724).
- [59] Siciliano, B. and Khatib, O. *Springer handbook of robotics: With 1375 figures and 109 tables*. 2nd edition. Berlin and Heidelberg: Springer, 2016. ISBN: 978-3-319-32550-7. DOI: [10.1007/978-3-319-32552-1](https://doi.org/10.1007/978-3-319-32552-1).
- [60] Simonis, K., Gloy, Y.-S., and Gries, T. "INDUSTRIE 4.0 - Automation in weft knitting technology". In: *IOP Conference Series: Materials Science and Engineering* 141.1 (2016), p. 012014. ISSN: 1757-899X. DOI: [10.1088/1757-899X/141/1/012014](https://doi.org/10.1088/1757-899X/141/1/012014). URL: <https://iopscience.iop.org/article/10.1088/1757-899x/141/1/012014/meta>.
- [61] Singh, M., Fuenmayor, E., Hinchy, E., Qiao, Y., Murray, N., and Devine, D. "Digital Twin: Origin to Future". In: *Applied System Innovation* 4.2 (2021), p. 36. ISSN: 2571-5577. DOI: [10.3390/asi4020036](https://doi.org/10.3390/asi4020036). URL: <https://www.mdpi.com/2571-5577/4/2/36>.
- [62] Tomar, B., Shiva, S., and Nath, T. "A review on wire arc additive manufacturing: Processing parameters, defects, quality improvement and recent advances". In: *Materials Today Communications* 31 (2022), p. 103739. ISSN: 2352-4928. DOI: [10.1016/j.mtcomm.2022.103739](https://doi.org/10.1016/j.mtcomm.2022.103739). URL: <https://www.sciencedirect.com/science/article/pii/S2352492822005992>.
- [63] van Le, T., Paris, H., and Mandil, G. "Environmental impact assessment of an innovative strategy based on an additive and subtractive manufacturing combination". In: *Journal of Cleaner Production* 164 (2017), pp. 508–523. ISSN: 0959-6526. DOI: [10.1016/j.jclepro.2017.06.204](https://doi.org/10.1016/j.jclepro.2017.06.204). URL: <https://www.sciencedirect.com/science/article/pii/S0959652617313732>.
- [64] Wang, W., Guo, Q., Yang, Z., Jiang, Y., and Xu, J. "A state-of-the-art review on robotic milling of complex parts with high efficiency and precision". In: *Robotics and Computer-Integrated Manufacturing* 79 (2023), p. 102436. ISSN: 0736-5845. DOI: [10.1016/j.rcim.2022.102436](https://doi.org/10.1016/j.rcim.2022.102436). URL: <https://www.sciencedirect.com/science/article/pii/S073658452200120x>.
- [65] Watson, J. K. and Taminger, K. M. B. "A decision-support model for selecting additive manufacturing versus subtractive manufacturing based on energy consumption". In: *Journal of Cleaner Production* 176 (2015), pp. 1316–1322. ISSN: 0959-6526. DOI: [10.1016/j.jclepro.2015.12.009](https://doi.org/10.1016/j.jclepro.2015.12.009). URL: <https://www.sciencedirect.com/science/article/pii/S0959652615018247>.
- [66] Zhu, S., Ding, G., Qin, S., Lei, J., Zhuang, L., and Yan, K. "Integrated geometric error modeling, identification and compensation of CNC machine tools". In: *International Journal of Machine Tools and Manufacture* 52.1 (2012), pp. 24–29. ISSN: 0890-6955. DOI: [10.1016/j.ijmachtools.2011.08.011](https://doi.org/10.1016/j.ijmachtools.2011.08.011). URL: <https://www.sciencedirect.com/science/article/pii/S0890695511001490>.




## 6 Structure of the Thesis

The following structure is serving as a rough guide for the proposed research question.

1. Introduction
  - (a) Motivation
  - (b) Problem Formulation
  - (c) Aim
2. State of Research and Development
  - (a) Manufacturing Technologies
    - i. Computer-Aided Manufacturing
    - ii. Subtractive Manufacturing
    - iii. Additive Manufacturing
      - A. Generic 3D-Printing
      - B. Wire Arc Additive Manufacturing
    - iv. Industrial Robots
      - A. Basic Structure
      - B. Advantages and Disadvantages
      - C. Continuous Path Mode
  - (b) Path Planning
  - (c) Machine Learning
  - (d) Optimization Algorithms
  - (e) Comparison of the State of the Art
3. Methodology
  - (a) Selection of Process Parameters
  - (b) Optimization of Boundary Conditions
4. Implementation and Validation
  - (a) Implementation
  - (b) Testing and Validation
  - (c) Analysis and Discussion of the results
    - i. Analysis
    - ii. Discussion
5. Conclusion
  - (a) Summary
  - (b) Outlook

**Review**

*Content presentation created by:*

_____, _____	Garching, 06.11.23	_____, _____
<i>Place, date</i>	<i>Place, date</i>	<i>Place, date</i>
_____ Student	 _____ First examiner, Supervising scientific staff at the chair	_____ Second examiner, Center of Key Competencies