

DUT-STOOL 2.0: more solid fit on central beam


Following an idea, I created a DUT STOOL v2.0, where both in the top as at the end of the sleeve of the stool a THIGHT fit is possible. Thusfar the fit is done with a M4 screw, but that damages the central beam.

The inner diameter is after printing a very tight fit, its length increased.

At the top end I applied a taper over 15mm reducing the diameter by $\sim 0.1\text{mm}$

At the bottom end 2 M4 bolt and nut to tighten also the bottom end.

The result is a very solid mounting on the central beam of the Stool, tapping on it shows one solidness, as if it is one whole with the central beam.

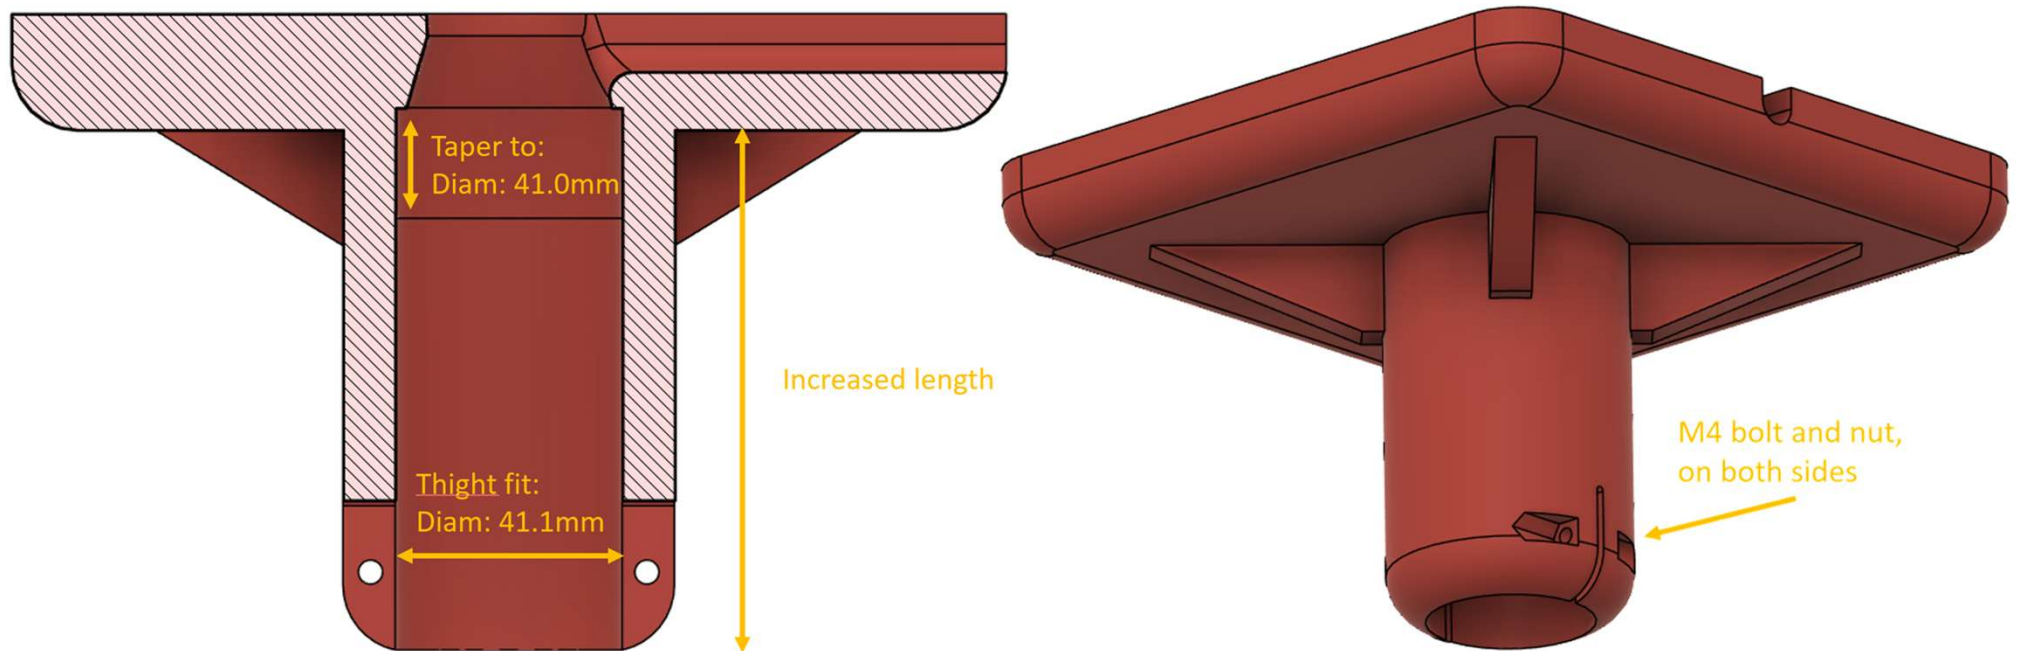

DUT-STOOL 2.0: more solid fit on central beam

Crucial: Normally I remove quite quickly after printing is finished. This time I did not, I left it overnight on the printplate. Not a good idea as the shrinkage that occurs, and the stress releasing is then influenced by the plate, resulting in a not so flat top of stool, and a small mis-alignment of the sleeve that fits over the central beam.

So I printed again and removed it directly after printing. And left it on its side overnight on a table to cool and to even the stress.

The result an almost perfectly flat top, only the edges of the hole and the open conduit in the top for the cabling needed a little bit of sanding. Mounting alignment is spot-on. And the corners there is a slight droop, less than 0.1mm. Will have gaffer tape on the corners anyhow to get some friction when mounting a DUT.

