
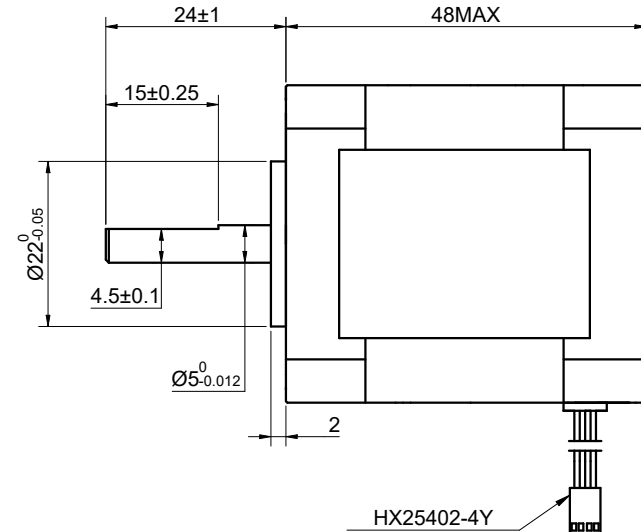


CUSTOMER'S MODEL: NO MODEL
END COVER COLOR: BLACK

REV.	REVISION RECORD	BY	DATE
0	ORIGIN	MYX	8.1.2025

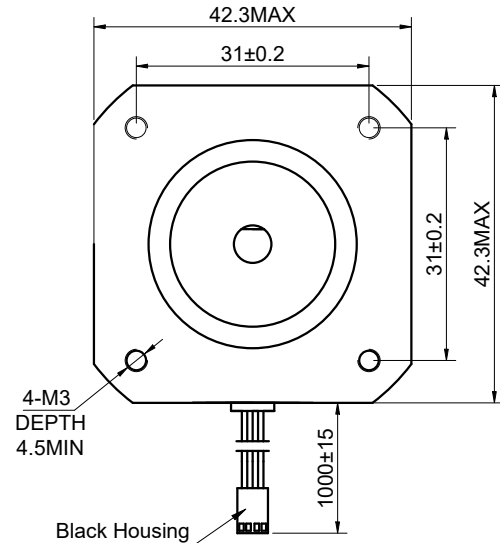

CONNECTION	UNIPOLAR
AMPS/PHASE	2.00
RESISTANCE/PHASE(Ohms)@25°C	1.60±10%
INDUCTANCE/PHASE(mH)@1KHz	3.00±20%
HOLDING TORQUE(Nm)[lb-in]	0.59[5.22]
STEP ANGLE(°)	1.80
STEP ACCURACY(NON-ACCUM)	±5.00%
ROTOR INERTIA(g-cm²)	82.00
WEIGHT(Kg)[lb]	--
AMBIENT TEMPERATURE	-10°C~50°C[14°F~122°F]
INSULATION CLASS	B 130°C[266°F]
TEMPERATURE RISE	MAX.80°C

COMMENT:LENGTH 20mm: 21N MAX
1.TMBF 6000h OR MORE @ 24V/300RPM
2.INSULATION RESISTANCE
(NORMAL TEMPERATURE AND
HUMIDITY): 100 Mohm
3.DIELECTRIC STRENGTH 500VAC FOR
1MIN.(BETWEEN THE MOTOR COILS
AND THE MOTOR CASE)



MOTOR CONNECTION			
PIN NO	BIPOLAR	LEADS	WINDING
1	A+	BLK	
2	A -	GRN	
3	B+	RED	
4	B -	BLU	

FULL STEP 2 PHASE-Ex.,WHEN FACING MOUNTING END (X)							DIMENSIONS ARE IN MILLIMETERS.	
STEP	A+	B+	A-	B-	O(0)		DECIMALS	ANGLES
1	-	-			+		X ±0.5	±2°
2		-	-		+		X.X ±0.25	
3			-	-	+		X.XX ±0.13	
4	-			-	+			

STEPPERONLINE®									
STEPPER MOTOR									
17HS19-2004S1									
REV.	0	SCALE	1:1	DWG NO.	A0842				

SIGNATURE		DATE
DRN	MYX	8.1.2025
APVD	ZPJ	8.1.2025

THIS DOCUMENT SHALL NOT BE REPRODUCED
NOR SHALL THE INFORMATION CONTAINED
HEREIN BE USED BY OR DISCLOSED TO
OTHERS UNLESS EXPRESSLY AUTHORIZED IN
BY WRITING STEPPERONLINE.