




INDUSTRYLUX


034 mit Schirm Alu 120°



LIGHT DISTRIBUTION CURVE

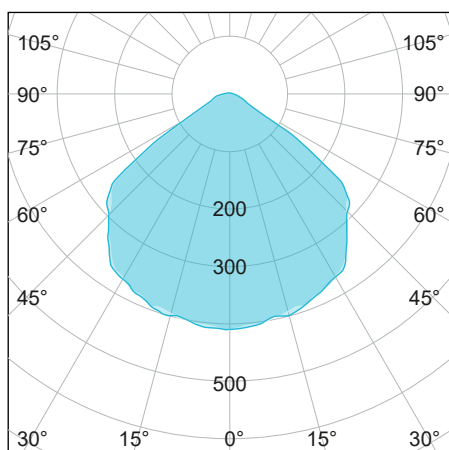

TECHNICAL DRAWING



LIGHT INFORMATION

beam angle	120°
color temperature	5.000 K
color tolerance	< 5 SDCM
color rendering index	< 80

PERFORMANCE

luminous efficiency	143 lm/W
system performance	30 W
luminous flux	4.300 lm
dimnable	No

PROPERTIES

through-wiring	No
connection	Cable: 3 x 1,0 mm², 1,5 m
module per circuit breaker B10A	2
module per circuit breaker B16A	3
module per circuit breaker C10A	3
module per circuit breaker C16A	6
switching cycles	> 500.000
voltage range AC	100 – 240 V AC, 50/60 Hz

RESILIENCE

protection class	I
impact resistance	IK10
protection type	IP65
lifespan	> 50.000 h [L80, B10]
UV resistant	Limited
operating temperature	–30 to +50 °C
foodready	No

MATERIAL

cover Transparent cover

ORDER OVERVIEW

IndustryLUX 034 with
aluminium reflector 120°

product code	431050400093 + 430200001200
--------------	--------------------------------

EAN code	4260374011118
----------	---------------

warranty	5 years
----------	---------

ACCESSORIES

120° aluminium reflector für IndustryLUX series 034-205

cover	transparent cover
-------	-------------------

material (cover)	PC
------------------	----

material (housing)	Aluminium
--------------------	-----------

housing color	Grey
---------------	------

SCOPE OF DELIVERY

no accessory included

DIMENSION

L x W x H / Ø (H2)	Ø 190 (220) x 265 mm
--------------------	----------------------

weight	4,2 kg
--------	--------