




Rettungszeichen SIGMA

L 49DMS009 für Zentral-/Gruppenbatterie



TECHNICAL DRAWING

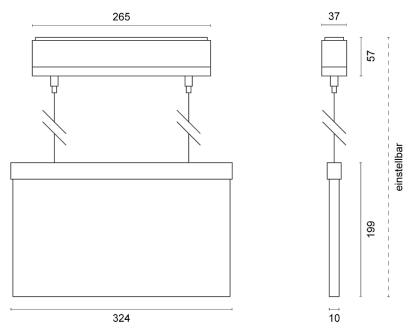

LIGHT INFORMATION

PROPERTIES

through-wiring	No
connection	Terminal: 2-pole max. 2,5 mm ²
module per circuit breaker B10A	—
module per circuit breaker B16A	—
module per circuit breaker C10A	—
module per circuit breaker C16A	—
switching cycles	> 500.000
voltage range AC	230 V AC, 50/60 Hz
voltage range DC	176 – 275 V DC

ORDER OVERVIEW

Escape sign luminaire SIGMA-L 49DMS009 for central battery	
product code	SL49DMS009
EAN code	4260374015451
warranty	5 years

ACCESSORIES

No accessories available

PERFORMANCE

luminous efficiency	117 lm/W
system performance	6 VA
luminous flux	.350 lm
dimnable	No

RESILIENCE

protection class	II
impact resistance	IK04
protection type	IP40
lifespan	> 50.000 h [L80, B10]
UV resistant	No
operating temperature	–10 to +40 °C

MATERIAL

cover	Transparent cover
material (cover)	PC
material (housing)	PC
housing color	White

SCOPE OF DELIVERY

includes mounting material and 3-pcs. pictogramset
--

DIMENSION

L x W x H / Ø (H2)	324 x 199 x 37 (10) mm
weight	1,2 kg