



# PanelLUX SQUARE



## LIGHT DISTRIBUTION CURVE

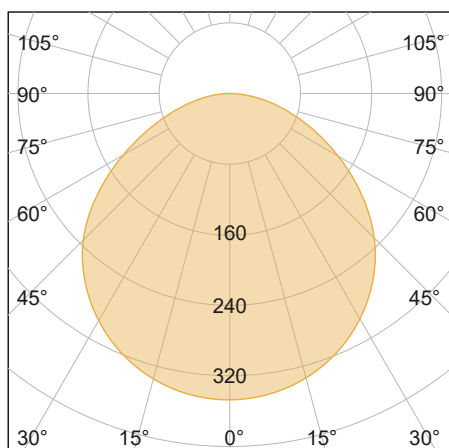

## TECHNICAL DRAWING



## LIGHT INFORMATION

beam angle	80°
color temperature	4.000 K
color tolerance	< 5 SDCM
color rendering index	> 80

## PROPERTIES

through-wiring	According to power supply
connection	According to power supply
module per circuit breaker B10A	52
module per circuit breaker B16A	83
module per circuit breaker C10A	52
module per circuit breaker C16A	83
switching cycles	> 500.000
voltage range AC	Je nach VSG

## ORDER OVERVIEW

PanelLUX SQUARE   4.000 K	
product code	626240340021
EAN code	4260374019237
warranty	4 years

## ACCESSORIES

Cord suspension for PanelLUX SQUARE/LONG
Flush mounting frame for PanelLUX SQUARE

## PERFORMANCE

luminous efficiency	124 lm/W
system performance	34 W
luminous flux	4.200 lm
dimnable	According to power supply

## RESILIENCE

protection class	III
impact resistance	IK07
protection type	IP20
lifespan	> 50.000 h [L80, B10]
UV resistant	Limited
operating temperature	-25 to +45 °C
foodready	No

## MATERIAL

cover	Prismatic cover
material (cover)	PC
material (housing)	Aluminium
housing color	White

## SCOPE OF DELIVERY

several power supply options available (not included)

## DIMENSION

L x W x H / Ø (H2)	620 x 620 x 10 (46) mm
weight	2,7 kg