




# IndustryLUX FLAT NEO


156 | 60 x 60°



## LIGHT DISTRIBUTION CURVE

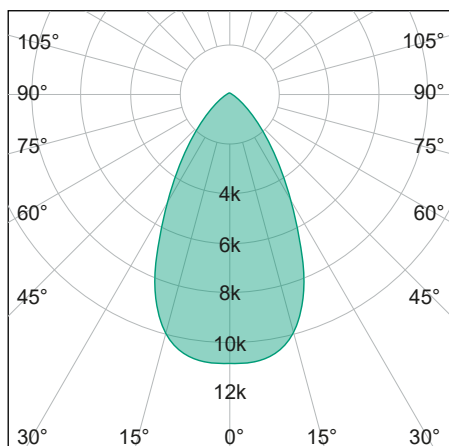

## TECHNICAL DRAWING

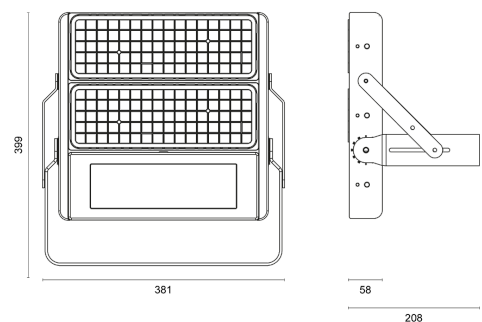

## LIGHT INFORMATION

|                       |          |
|-----------------------|----------|
| beam angle            | 60 x 60° |
| color temperature     | 5.000 K  |
| color tolerance       | < 5 SDCM |
| color rendering index | < 80     |

## PROPERTIES

|                                 |                                       |
|---------------------------------|---------------------------------------|
| through-wiring                  | No                                    |
| connection                      | Plug: 3-pole max. 2,5 mm <sup>2</sup> |
| module per circuit breaker B10A | 2                                     |
| module per circuit breaker B16A | 4                                     |
| module per circuit breaker C10A | 4                                     |
| module per circuit breaker C16A | 7                                     |
| switching cycles                | > 500.000                             |
| voltage range AC                | 100 – 240 V AC, 50/60 Hz              |

## ORDER OVERVIEW

|                                     |               |
|-------------------------------------|---------------|
| IndustryLUX FLAT NEO 156   60 x 60° |               |
| product code                        | 445015600030  |
| EAN code                            | 4260374015161 |
| warranty                            | 5 years       |

## ACCESSORIES

|                          |
|--------------------------|
| No accessories available |
|--------------------------|

## PERFORMANCE

|                     |           |
|---------------------|-----------|
| luminous efficiency | 142 lm/W  |
| system performance  | 156 W     |
| luminous flux       | 22.100 lm |
| dimnable            | No        |

## RESILIENCE

|                       |                       |
|-----------------------|-----------------------|
| protection class      | I                     |
| impact resistance     | IK10                  |
| protection type       | IP65                  |
| lifespan              | > 50.000 h [L80, B10] |
| UV resistant          | Limited               |
| operating temperature | –40 to +50 °C         |
| foodready             | No                    |

## MATERIAL

|                    |                   |
|--------------------|-------------------|
| cover              | Transparent cover |
| material (cover)   | PC                |
| material (housing) | Aluminium         |
| housing color      | Black             |

## SCOPE OF DELIVERY

|                         |
|-------------------------|
| includes connector plug |
|-------------------------|

## DIMENSION

|                    |                               |
|--------------------|-------------------------------|
| L x W x H / Ø (H2) | 381 x 328 (399) x 58 (208) mm |
| weight             | 7,0 kg                        |