IndustryLUX
FLAT NEO
78 | 50 x 140° | 4.000K

IP 65 · IK 10

LIGHT DISTRIBUTION CURVE
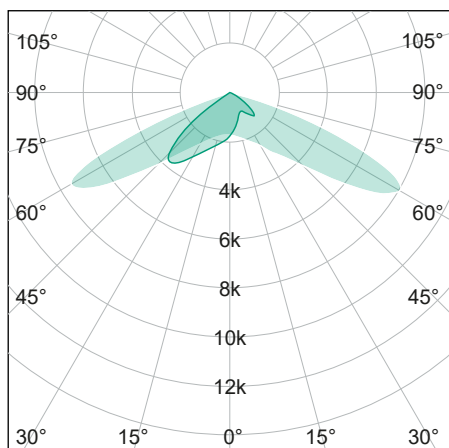
TECHNICAL DRAWING

289 | 381 | 58 | 208
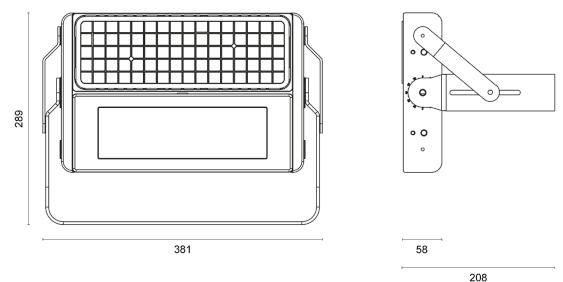
LIGHT INFORMATION

beam angle	50 x 140°
color temperature	4.000 K
color tolerance	< 5 SDCM
color rendering index	< 80

PROPERTIES

through-wiring	No
connection	Plug: 3-pole max. 2,5 mm²
module per circuit breaker B10A	3
module per circuit breaker B16A	5
module per circuit breaker C10A	5
module per circuit breaker C16A	9
switching cycles	> 500.000
voltage range AC	100 – 240 V AC, 50/60 Hz

ORDER OVERVIEW

IndustryLUX FLAT NEO 78 | 50 x 140° | 4.000K	
product code	444007510111
EAN code	4260374018193
warranty	5 years

ACCESSORIES

No accessories available

PERFORMANCE

luminous efficiency	142 lm/W
system performance	78 W
luminous flux	11.100 lm
dimmable	No

RESILIENCE

protection class	I
impact resistance	IK10
protection type	IP65
lifespan	> 50.000 h [L80, B10]
UV resistent	Limited
operating temperature	–40 to +50 °C
foodready	No

MATERIAL

cover	Transparent cover
material (cover)	PC
material (housing)	Aluminium
housing color	Black

SCOPE OF DELIVERY

includes connector plug

DIMENSION

L x W x H / Ø (H2)	381 x 218 (289) x 58 (208) mm
weight	5,1 kg