




# INDUSTRYLUX


375



## LIGHT DISTRIBUTION CURVE

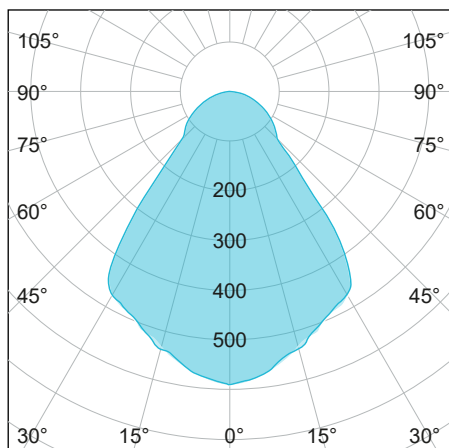

## TECHNICAL DRAWING



## LIGHT INFORMATION

beam angle	120°
color temperature	5.000 K
color tolerance	< 5 SDCM
color rendering index	< 80

## PROPERTIES

through-wiring	No
connection	Cable: 3 x 1,0 mm², 1,5 m
module per circuit breaker B10A	1
module per circuit breaker B16A	2
module per circuit breaker C10A	3
module per circuit breaker C16A	4
switching cycles	> 500.000
voltage range AC	100 – 240 V AC, 50/60 Hz

## ORDER OVERVIEW

IndustryLUX 375	
product code	431050650033
EAN code	4260374011255
warranty	5 years

## ACCESSORIES

120° aluminium reflector für IndustryLUX series 274-375
80° plastic refractor für IndustryLUX series 274-375
80° aluminium reflector für IndustryLUX series 274-375
100° aluminium reflector für IndustryLUX series 274-375

## PERFORMANCE

luminous efficiency	145 lm/W
system performance	300 W
luminous flux	44.800 lm
dimmable	No

## RESILIENCE

protection class	I
impact resistance	IK06
protection type	IP65
lifespan	> 50.000 h [L80, B10]
UV resistant	Yes
operating temperature	–30 to +50 °C
foodready	No

## MATERIAL

cover	Transparent cover
material (cover)	Glass
material (housing)	Aluminium
housing color	Grey

## SCOPE OF DELIVERY

no accessory included
-----------------------

## DIMENSION

L x W x H / Ø (H2)	Ø 348 (330) x 537 mm
weight	16,4 kg