




7PROOF


1400 PMMA | 5.000 K



LIGHT DISTRIBUTION CURVE

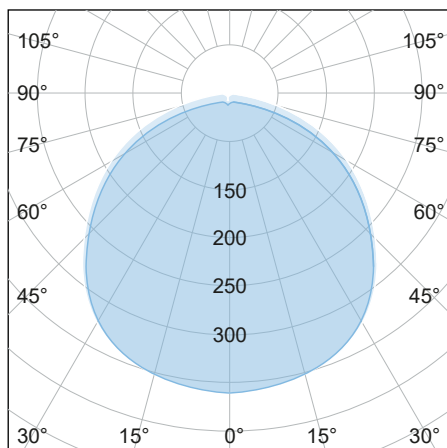

TECHNICAL DRAWING



LIGHT INFORMATION

beam angle	130°
color temperature	5.000 K
color tolerance	< 5 SDCM
color rendering index	> 83

PROPERTIES

through-wiring	No
connection	Cable: 2 x 0,75 mm², 2,0 m
module per circuit breaker B10A	49
module per circuit breaker B16A	79
module per circuit breaker C10A	49
module per circuit breaker C16A	79
switching cycles	> 500.000
voltage range AC	220 – 240 V AC, 50/60 Hz

ORDER OVERVIEW

7PROOF 1400 PMMA 5.000 K	
product code	821450400038
EAN code	4260374014478
warranty	5 years

ACCESSORIES

Stainless steel mounting clip (set of 2)
--

PERFORMANCE

luminous efficiency	150 lm/W
system performance	40 W
luminous flux	6.000 lm
dimmable	No

RESILIENCE

protection class	II
impact resistance	IK08
protection type	IP69
lifespan	> 50.000 h [L80, B10]
UV resistant	Yes
operating temperature	–25 to +50 °C
foodready	Yes

MATERIAL

cover	diffuse cover
material (cover)	PMMA
material (housing)	PMMA
housing color	White

SCOPE OF DELIVERY

includes 2x mounting clip; DALI on request
--

DIMENSION

L x W x H / Ø (H2)	1.400 x Ø 48 (63) mm
weight	0,8 kg