




# INDUSTRYLUX HT


220 mit Schirm Alu 80°



LIGHT DISTRIBUTION CURVE

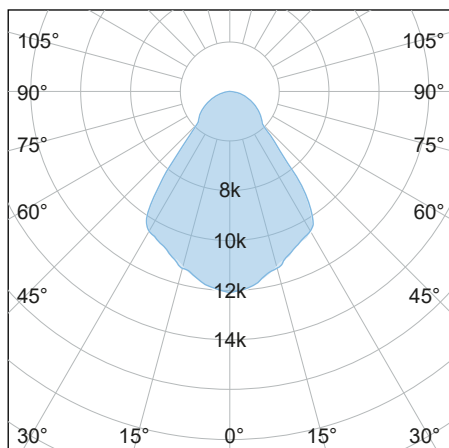

TECHNICAL DRAWING



## LIGHT INFORMATION

beam angle	120°
color temperature	5.000 K
color tolerance	< 5 SDCM
color rendering index	< 80

## PROPERTIES

through-wiring	No
connection	Cable, 3 x 1,0 mm², 1,5 m
module per circuit breaker B10A	4
module per circuit breaker B16A	7
module per circuit breaker C10A	7
module per circuit breaker C16A	12
switching cycles	> 500.000
voltage range AC	220 – 240 V AC, 50/60 Hz

## ORDER OVERVIEW

IndustryLUX HT 220 with aluminium reflector 80°	
product code	435070220052 + 430200008000
EAN code	4260374015826
warranty	5 years

## ACCESSORIES

80° aluminium reflector für IndustryLUX series 034-205
--

## PERFORMANCE

luminous efficiency	143 lm/W
system performance	220 W
luminous flux	31.000 lm
dimmable	No

## RESILIENCE

protection class	I
impact resistance	IK06
protection type	IP65
lifespan	> 80.000 h [L80, B10]
UV resistant	Yes
operating temperature	–30 to +70 °C
foodready	No

## MATERIAL

cover	Transparent cover
material (cover)	Glass
material (housing)	Aluminium
housing color	Grey

## SCOPE OF DELIVERY

no accessory included
-----------------------

## DIMENSION

L x W x H / Ø (H2)	Ø 348 (330) x 537 mm
weight	16,4 kg