





# DeLUX SPLASH 1200



## LIGHT DISTRIBUTION CURVE

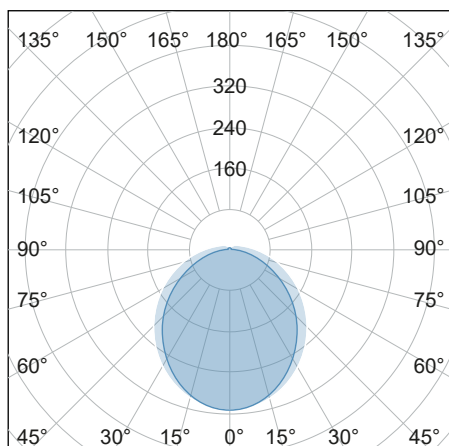

## TECHNICAL DRAWING



## LIGHT INFORMATION

beam angle	120°
color temperature	4.000 K
color tolerance	< 5 SDCM
color rendering index	> 80

## PROPERTIES

through-wiring	3 x 1,5 mm <sup>2</sup>
connection	Terminal: 3-pole max. 2,5 mm <sup>2</sup>
module per circuit breaker B10A	69
module per circuit breaker B16A	110
module per circuit breaker C10A	69
module per circuit breaker C16A	110
switching cycles	> 200.000
voltage range AC	220 – 240 V AC, 50/60 Hz
voltage range DC	176-280 V DC

## ORDER OVERVIEW

DeLUX SPLASH 1200	
product code	151240400131
EAN code	4260374016977
warranty	3 years

## ACCESSORIES

Cord suspension 2m
--------------------

## PERFORMANCE

luminous efficiency	140 lm/W
system performance	30 W
luminous flux	4.200 lm
dimmmable	No

## RESILIENCE

protection class	II
impact resistance	IK08
protection type	IP65
lifespan	> 50.000 h [L70, B10]
UV resistant	No
operating temperature	–20 to +45 °C
foodready	Yes

## MATERIAL

cover	diffuse cover
material (cover)	PC
material (housing)	PC
housing color	White

## SCOPE OF DELIVERY

includes 2x mounting clip
---------------------------

## DIMENSION

L x W x H / Ø (H2)	1.252 x 63 x 75 (80) mm
weight	1,1 kg