





# InteriorLUX NEA 2.0



## LIGHT DISTRIBUTION CURVE

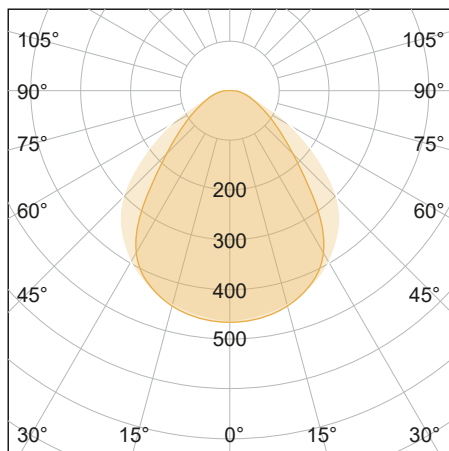

## TECHNICAL DRAWING

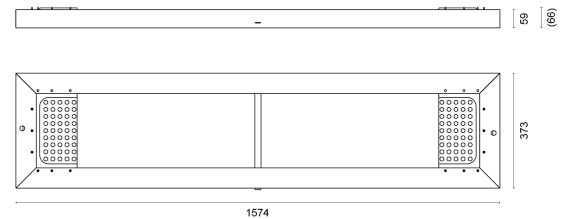

## LIGHT INFORMATION

beam angle	90°
color temperature	3.000   4.000   6.000 K
color tolerance	< 3 SDCM
color rendering index	> 80

## PROPERTIES

through-wiring	Yes
connection	Terminal: 5-pole max. 2,5 mm <sup>2</sup>
module per circuit breaker B10A	18
module per circuit breaker B16A	29
module per circuit breaker C10A	30
module per circuit breaker C16A	48
switching cycles	> 500.000

## PERFORMANCE

luminous efficiency	125 lm/W
system performance	48 W
luminous flux	6.000 lm
dimnable	DALI / Dip switch(48W 41W 37W 32W)

## RESILIENCE

protection class	II
impact resistance	IK03
protection type	IP40
lifespan	> 50.000 h [L80, B10]
UV resistant	Limited
operating temperature	-20 to +45 °C
foodready	No

voltage range AC	220 – 240 V AC, 50/60Hz
------------------	-------------------------

## ORDER OVERVIEW

InteriorLUX NEA 2.0

product code 161595400162

EAN code 4260374019220

warranty 5 years

## ACCESSORIES

No accessories available

## MATERIAL

cover Prismatic cover

material (cover) PS

material (housing) Aluminium

housing color White

## SCOPE OF DELIVERY

includes mounting material

## DIMENSION

L x W x H / Ø (H2) 1574 x 374 x 47 (59) mm

weight 8,2 kg