




# IndustryLUX TUBOLA


1500 GREEN



## LIGHT DISTRIBUTION CURVE

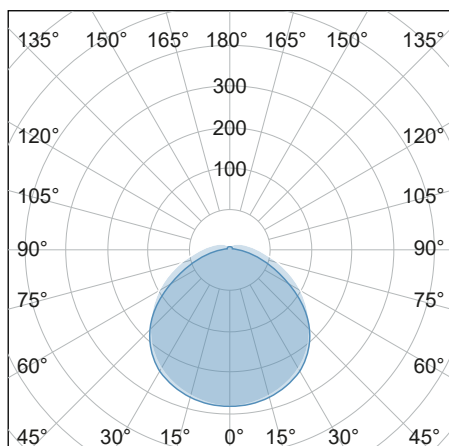

## TECHNICAL DRAWING



## LIGHT INFORMATION

beam angle	130°
color temperature	Grün
color tolerance	< 5 SDCM

## PROPERTIES

through-wiring	3 x 1,5 mm²
connection	Terminal: 3-pole max. 2,5 mm²
switching cycles	> 500.000
voltage range AC	220 – 240 V AC, 50/60 Hz
voltage range DC	176 - 276 V DC

## ORDER OVERVIEW

IndustryLUX TUBOLA 1500 GREEN	
product code	811516320018
EAN code	4260374013662
warranty	5 years

## ACCESSORIES

Mounting plate for 2-3 luminaires
Cord suspension 2m
Stainless steel mounting clip (set of 2)
Cable gland for pressure equalization

## PERFORMANCE

luminous efficiency	82 lm/W
system performance	30 W
luminous flux	2.450 lm
dimmmable	No

## RESILIENCE

protection class	II
impact resistance	IK08
protection type	IP65
lifespan	> 50.000 h [L80, B10]
UV resistant	Limited
operating temperature	–25 to +50 °C
foodready	Yes

## MATERIAL

cover	diffuse cover
material (cover)	PC
material (housing)	PC
housing color	White

## SCOPE OF DELIVERY

includes 2x mounting clip and cable gland M20
---

## DIMENSION

L x W x H / Ø (H2)	1.500 x Ø 48 (80) mm
weight	1,0 kg