



# OfficeLUX SOLEE



## LIGHT DISTRIBUTION CURVE

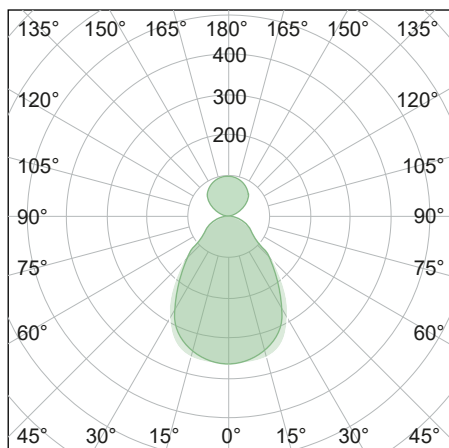

## TECHNICAL DRAWING

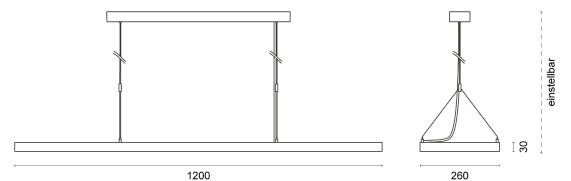

## LIGHT INFORMATION

beam angle	110° ↑ 90° ↓
color temperature	4.000 K
color tolerance	< 3 SDCM
color rendering index	> 80

## PROPERTIES

through-wiring	5 x 0,75 mm <sup>2</sup>
connection	Terminal: 5-pole max. 2,5 mm <sup>2</sup>
module per circuit breaker B10A	34
module per circuit breaker B16A	54
module per circuit breaker C10A	34
module per circuit breaker C16A	54
switching cycles	> 500.000
voltage range AC	200 – 240 V AC, 50/60Hz

## ORDER OVERVIEW

OfficeLUX SOLEE	
product code	120340580087
EAN code	4260374015031
warranty	5 years

## ACCESSORIES

No accessories available
--------------------------

## PERFORMANCE

luminous efficiency	81 lm/W
system performance	58 W
luminous flux	700 lm ↑ 4.000 lm ↓
dimnable	Dip switch   DALI

## RESILIENCE

protection class	I
impact resistance	IK04
protection type	IP20
lifespan	> 50.000 h [L80, B10]
UV resistant	No
operating temperature	–20 to +45 °C
foodready	No

## MATERIAL

cover	Prismatic cover
material (cover)	PC
material (housing)	Aluminium
housing color	Silver

## SCOPE OF DELIVERY

includes cord suspension and mounting material
--

## DIMENSION

L x W x H / Ø (H2)	1.200 x 260 x 30 (64) mm
weight	5,7 kg