




RoadLUX PRO


49 | 60 x 150°



LIGHT DISTRIBUTION CURVE

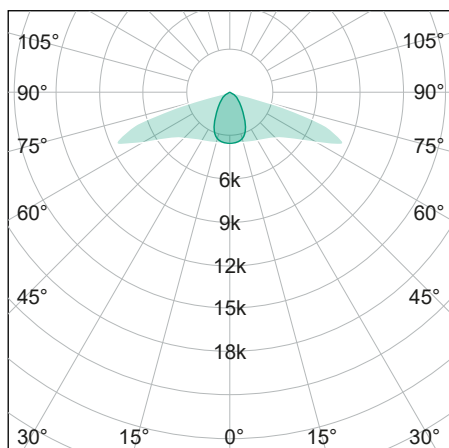

TECHNICAL DRAWING



LIGHT INFORMATION

| | |
|-----------------------|-----------|
| beam angle | 60 x 150° |
| color temperature | 4.000 K |
| color tolerance | < 5 SDCM |
| color rendering index | > 70 |

PROPERTIES

| | |
|---------------------------------|---|
| through-wiring | No |
| connection | Terminal: 3-pole max. 2,5 mm ² |
| module per circuit breaker B10A | 40 |
| module per circuit breaker B16A | 64 |
| module per circuit breaker C10A | 40 |
| module per circuit breaker C16A | 64 |
| switching cycles | > 500.000 |
| voltage range AC | 200 – 240 V AC, 50/60 Hz |

ORDER OVERVIEW

| | |
|----------------------------|---------------|
| RoadLUX PRO 49 60 x 150° | |
| product code | 496040490118 |
| EAN code | 4260374016595 |
| warranty | 5 years |

ACCESSORIES

| |
|---|
| Adapter 76mm for RoadLUX PRO |
| Adapter 34mm for RoadLUX PRO |
| Wall bracket for RoadLUX PRO |
| Corner bracket for RoadLUX PRO |
| Double post-top bracket for RoadLUX PRO |

PERFORMANCE

| | |
|---------------------|----------|
| luminous efficiency | 130 lm/W |
| system performance | 49 W |
| luminous flux | 6.350 lm |
| dimnable | No |

RESILIENCE

| | |
|-----------------------|-----------------------|
| protection class | I |
| impact resistance | IK08 |
| protection type | IP66 |
| lifespan | > 50.000 h [L80, B10] |
| UV resistant | Yes |
| operating temperature | –30 to +50 °C |
| foodready | No |

MATERIAL

| | |
|--------------------|-------------------|
| cover | Transparent cover |
| material (cover) | Glass |
| material (housing) | Aluminium |
| housing color | Grey |

SCOPE OF DELIVERY

| |
|------------------------------------|
| reducing adaptor for 42 mm; screws |
|------------------------------------|

DIMENSION

| | |
|--------------------|--------------------------------|
| L x W x H / Ø (H2) | 533 (679) x 283 x 117 (160) mm |
| weight | 5,9 kg |