




# IndustryLUX HEMERA 2.0


160



## LIGHT DISTRIBUTION CURVE

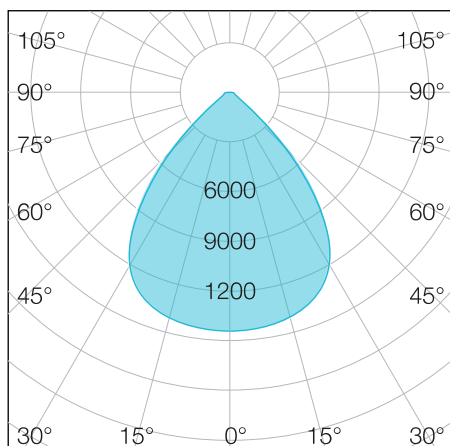

## TECHNICAL DRAWING



## LIGHT INFORMATION

beam angle	80°
color temperature	4.000   5.000   6.500 K
color tolerance	< 5 SDCM
color rendering index	> 83

## PROPERTIES

through-wiring	No
connection	Cable: 5 x 1,0 mm², 1,5 m
module per circuit breaker B10A	4
module per circuit breaker B16A	7
module per circuit breaker C10A	8
module per circuit breaker C16A	13
switching cycles	> 500.000
voltage range AC	100 – 240 V AC, 50/60 Hz

## ORDER OVERVIEW

IndustryLUX HEMERA 2.0 160	
product code	439980150073
EAN code	4260374018834
warranty	5 years

## ACCESSORIES

No accessories available
--------------------------

## PERFORMANCE

system performance	157 W
luminous flux	22.500 lm
dimmable	DALI 2

## RESILIENCE

protection class	I
impact resistance	IK08
protection type	IP65
lifespan	> 50.000 h [L80, B10]
UV resistant	Limited
operating temperature	–30 to +50 °C
foodready	No

## MATERIAL

cover	Transparent cover
material (cover)	PC
material (housing)	Aluminium
housing color	Grey

## SCOPE OF DELIVERY

no accessory included
-----------------------

## DIMENSION

L x W x H / Ø (H2)	Ø 400 x 88 (165) mm
weight	5,3 kg