




# INDUSTRYLUX


375 mit Schirm Alu 120°



## LIGHT DISTRIBUTION CURVE

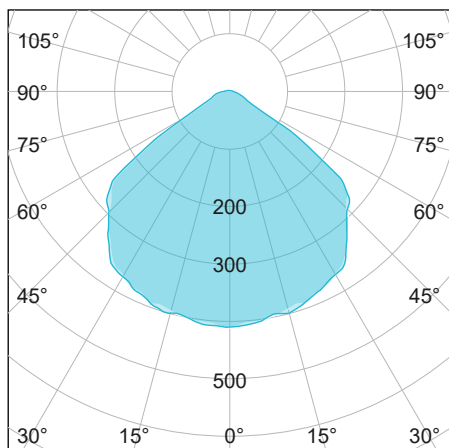

## TECHNICAL DRAWING



## LIGHT INFORMATION

|                       |          |
|-----------------------|----------|
| beam angle            | 120°     |
| color temperature     | 5.000 K  |
| color tolerance       | < 5 SDCM |
| color rendering index | < 80     |

## PROPERTIES

|                                 |                           |
|---------------------------------|---------------------------|
| through-wiring                  | No                        |
| connection                      | Cable: 3 x 1,0 mm², 1,5 m |
| module per circuit breaker B10A | 1                         |
| module per circuit breaker B16A | 2                         |
| module per circuit breaker C10A | 3                         |
| module per circuit breaker C16A | 4                         |
| switching cycles                | > 500.000                 |
| voltage range AC                | 100 – 240 V AC, 50/60 Hz  |

## ORDER OVERVIEW

|   |                             |
|---|-----------------------------|
| IndustryLUX 375 with aluminium reflector 120° |                             |
| product code                                  | 431050400033 + 430200001201 |
| EAN code                                      | 4260374011255               |
| warranty                                      | 5 years                     |

## ACCESSORIES

|   |
|---|
| 120° aluminium reflector für IndustryLUX series 274-375 |
|---|

## PERFORMANCE

|                     |           |
|---------------------|-----------|
| luminous efficiency | 145 lm/W  |
| system performance  | 300 W     |
| luminous flux       | 44.800 lm |
| dimmable            | No        |

## RESILIENCE

|                       |                       |
|-----------------------|-----------------------|
| protection class      | I                     |
| impact resistance     | IK06                  |
| protection type       | IP65                  |
| lifespan              | > 50.000 h [L80, B10] |
| UV resistant          | Yes                   |
| operating temperature | –30 to +50 °C         |
| foodready             | No                    |

## MATERIAL

|                    |                   |
|--------------------|-------------------|
| cover              | Transparent cover |
| material (cover)   | Glass             |
| material (housing) | Aluminium         |
| housing color      | Grey              |

## SCOPE OF DELIVERY

|                       |
|-----------------------|
| no accessory included |
|-----------------------|

## DIMENSION

|                    |                      |
|--------------------|----------------------|
| L x W x H / Ø (H2) | Ø 348 (330) x 537 mm |
| weight             | 16,4 kg              |