




IndustryLUX FARO X3


HTS 1500-140 DALI | 5.000 K



LIGHT DISTRIBUTION CURVE

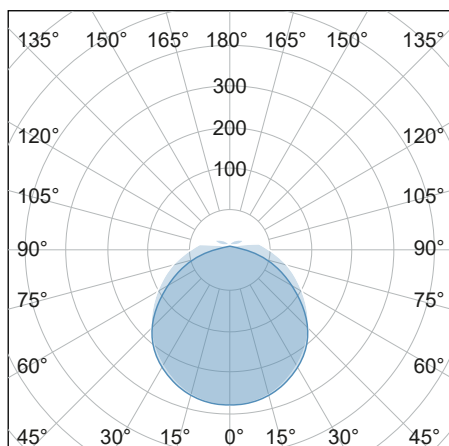

TECHNICAL DRAWING



LIGHT INFORMATION

| | |
|-----------------------|----------|
| beam angle | 140° |
| color temperature | 5.000 K |
| color tolerance | < 5 SDCM |
| color rendering index | > 83 |

PROPERTIES

| | |
|---------------------------------|-------------------------------|
| through-wiring | 5 x 1,5 mm² |
| connection | Terminal: 5-pole max. 1,5 mm² |
| module per circuit breaker B10A | 32 |
| module per circuit breaker B16A | 51 |
| module per circuit breaker C10A | 32 |
| module per circuit breaker C16A | 51 |
| switching cycles | > 500.000 |
| voltage range AC | 220 – 240 V AC, 50/60 Hz |

ORDER OVERVIEW

| | |
|--|---------------|
| IndustryLUX FARO X3 HTS 1500-140 DALI 5.000 K | |
| product code | 111550650068 |
| EAN code | 4260374015758 |
| warranty | 5 years |

ACCESSORIES

| |
|-----------------------------------|
| Mounting plate for 2-3 luminaires |
| Cord suspension 2m |
| Top-Entry-Cap |

PERFORMANCE

| | |
|---------------------|----------|
| luminous efficiency | 131 lm/W |
| system performance | 65 W |
| luminous flux | 8.500 lm |
| dimmmable | DALI |

RESILIENCE

| | |
|-----------------------|-----------------------|
| protection class | II |
| impact resistance | IK08 |
| protection type | IP65 |
| lifespan | > 50.000 h [L80, B10] |
| UV resistant | Limited |
| operating temperature | –30 to +60 °C |
| foodready | Yes |

MATERIAL

| | |
|--------------------|---------------|
| cover | diffuse cover |
| material (cover) | PC |
| material (housing) | PC |
| housing color | White |

SCOPE OF DELIVERY

| |
|---|
| includes 2x mounting clip and cable gland M20 |
|---|

DIMENSION

| | |
|--------------------|--------------------------|
| L x W x H / Ø (H2) | 1.500 x 104 x 57 (77) mm |
| weight | 2,5 kg |