





NoviLUX PRO 200



LIGHT DISTRIBUTION CURVE

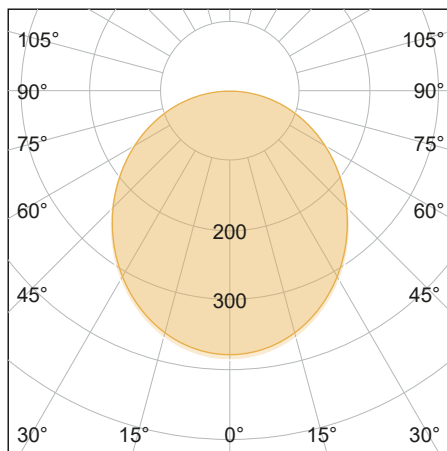

TECHNICAL DRAWING



LIGHT INFORMATION

beam angle	110°
color temperature	4.000 K
color tolerance	< 5 SDCM
color rendering index	> 80

PERFORMANCE

luminous efficiency	133 lm/W
system performance	24 W
luminous flux	3.200 lm
dimnable	No

PROPERTIES

through-wiring	No
connection	Terminal: 3-pole max. 2,5 mm ²
module per circuit breaker B10A	104
module per circuit breaker B16A	166
module per circuit breaker C10A	104
module per circuit breaker C16A	166
switching cycles	> 500.000

RESILIENCE

protection class	II
impact resistance	IK08
protection type	IP44
lifespan	> 50.000 h [L80, B10]
UV resistant	Limited
operating temperature	-25 to +50 °C
foodready	Yes

MATERIAL

voltage range AC	220 – 240 V AC, 50/60 Hz
------------------	--------------------------

ORDER OVERVIEW

NoviLUX PRO 200

product code	502040250024
--------------	--------------

EAN code	4260374014638
----------	---------------

warranty	3 years
----------	---------

ACCESSORIES

No accessories available

cover	diffuse cover
-------	---------------

material (cover)	PC
------------------	----

material (housing)	PC
--------------------	----

housing color	White
---------------	-------

SCOPE OF DELIVERY

includes mounting material

DIMENSION

L x W x H / Ø (H2)	Ø 220 (200) x 46 mm
--------------------	---------------------

weight	0,5 kg
--------	--------