




# IndustryLUX FLAT 2.0


250 | 85 x 135° | 4.000K



## LIGHT DISTRIBUTION CURVE

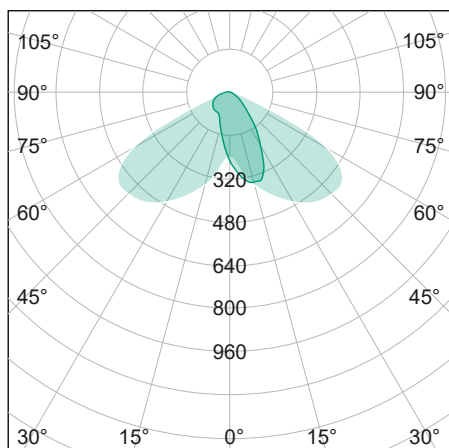

## TECHNICAL DRAWING

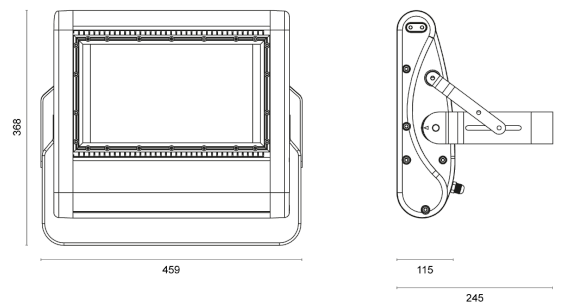

## LIGHT INFORMATION

|                       |           |
|-----------------------|-----------|
| beam angle            | 85 x 135° |
| color temperature     | 4.000 K   |
| color tolerance       | < 5 SDCM  |
| color rendering index | > 80      |

## PROPERTIES

|                                 |                           |
|---------------------------------|---------------------------|
| through-wiring                  | No                        |
| connection                      | Cable: 3 x 1,0 mm², 2,0 m |
| module per circuit breaker B10A | 2                         |
| module per circuit breaker B16A | 4                         |
| module per circuit breaker C10A | 4                         |
| module per circuit breaker C16A | 6                         |
| switching cycles                | > 500.000                 |
| voltage range AC                | 100 – 240 V AC, 50/60 Hz  |
| voltage range DC                | 176 – 250 V DC            |

## ORDER OVERVIEW

|  |               |
|--|---------------|
| IndustryLUX FLAT 2.0 250   85 x 135°<br>  4.000K |               |
| product code                                     | 442285250145  |
| EAN code   | 4260374018582 |
| warranty   | 5 years       |

## ACCESSORIES

|                          |
|--------------------------|
| No accessories available |
|--------------------------|

## PERFORMANCE

|                     |           |
|---------------------|-----------|
| luminous efficiency | 141 lm/W  |
| system performance  | 245 W     |
| luminous flux       | 34.450 lm |
| dimnable            | No        |

## RESILIENCE

|                       |                       |
|-----------------------|-----------------------|
| protection class      | I                     |
| impact resistance     | IK08                  |
| protection type       | IP65                  |
| lifespan              | > 60.000 h [L80, B10] |
| UV resistant          | Yes                   |
| operating temperature | –40 to +50 °C         |
| foodready             | No                    |

## MATERIAL

|                    |                   |
|--------------------|-------------------|
| cover              | Transparent cover |
| material (cover)   | Glass             |
| material (housing) | Aluminium         |
| housing color      | Black             |

## SCOPE OF DELIVERY

|                       |
|-----------------------|
| no accessory included |
|-----------------------|

## DIMENSION

|                    |                                |
|--------------------|--------------------------------|
| L x W x H / Ø (H2) | 460 x 325 (370) x 115 (245) mm |
| weight             | 8,9 kg                         |