





# PanelLUX LONG



## LIGHT DISTRIBUTION CURVE

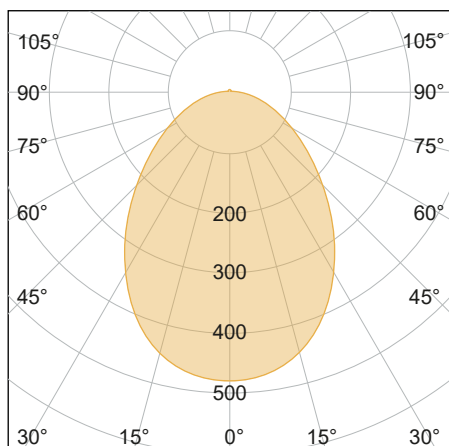

## TECHNICAL DRAWING

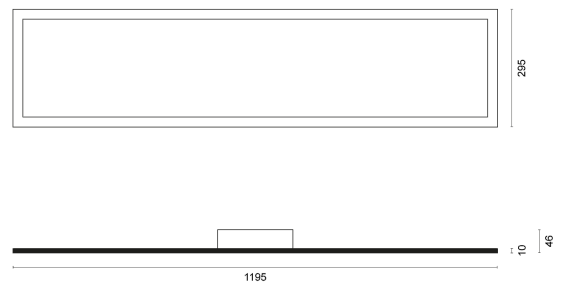

## LIGHT INFORMATION

beam angle	100°
color temperature	4.000 K
color tolerance	< 5 SDCM
color rendering index	> 80

## PROPERTIES

through-wiring	According to power supply
connection	According to power supply
module per circuit breaker B10A	52
module per circuit breaker B16A	83
module per circuit breaker C10A	52
module per circuit breaker C16A	83
switching cycles	> 500.000
voltage range AC	Je nach VSG

## ORDER OVERVIEW

PanelLUX LONG	
product code	626240380012
EAN code	4260374014690
warranty	4 years

## ACCESSORIES

Power supply for PanelLUX LONG (PLX-38S)
Power supply for PanelLUX LONG (PLX-38S-DA)
Cord suspension for PanelLUX SQUARE/LONG

## PERFORMANCE

luminous efficiency	103 lm/W
system performance	38 W
luminous flux	3.900 lm
dimnable	According to power supply

## RESILIENCE

protection class	III
impact resistance	IK07
protection type	IP20
lifespan	> 50.000 h [L80, B10]
UV resistant	Yes
operating temperature	-25 to +45 °C
foodready	No

## MATERIAL

cover	Prismatic cover
material (cover)	PMMA
material (housing)	Aluminium
housing color	White

## SCOPE OF DELIVERY

several power supply options available (not included)
---

## DIMENSION

L x W x H / Ø (H2)	1.200 x 300 x 10 (46) mm
weight	3,0 kg