


FloodLUX COMPACT


10



LIGHT DISTRIBUTION CURVE

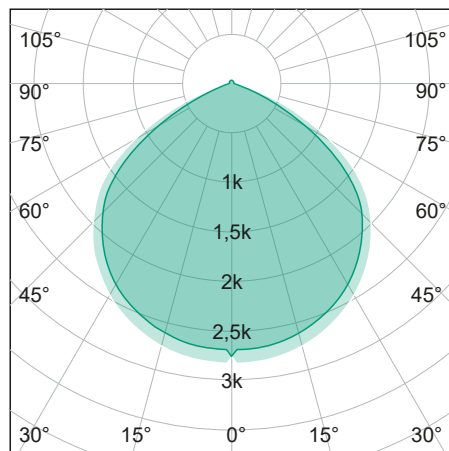

TECHNICAL DRAWING

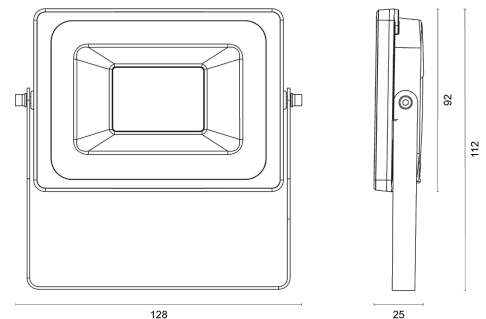

LIGHT INFORMATION

beam angle	120°
color temperature	5.000 K
color tolerance	< 5 SDCM
color rendering index	> 70

PERFORMANCE

luminous efficiency	90 lm/W
system performance	10 W
luminous flux	.900 lm
dimnable	No

PROPERTIES

through-wiring	No
connection	Cable: 3 x 1,0 mm ² , 0,5 m
module per circuit breaker B10A	100
module per circuit breaker B16A	160
module per circuit breaker C10A	166
module per circuit breaker C16A	266
switching cycles	> 200.000

RESILIENCE

protection class	I
impact resistance	IK05
protection type	IP65
lifespan	> 40.000 h [L70, B10]
UV resistant	Yes
operating temperature	-20 to +45 °C
foodready	No

MATERIAL

voltage range AC	220 – 240 V AC, 50/60 Hz
------------------	--------------------------

ORDER OVERVIEW

FloodLUX COMPACT 10

product code	455012010002
--------------	--------------

EAN code	4260374012702
----------	---------------

warranty	2 years
----------	---------

ACCESSORIES

No accessories available

cover	Transparent cover
-------	-------------------

material (cover)	Glass
------------------	-------

material (housing)	Aluminium
--------------------	-----------

housing color	Black
---------------	-------

SCOPE OF DELIVERY

no accessory included

DIMENSION

L x W x H / Ø (H2)	128 x 92 (112) x 25 (88) mm
--------------------	-----------------------------

weight	0,3 kg
--------	--------