


PanelLUX SLIM


UGR | 4.000 K



LIGHT DISTRIBUTION CURVE

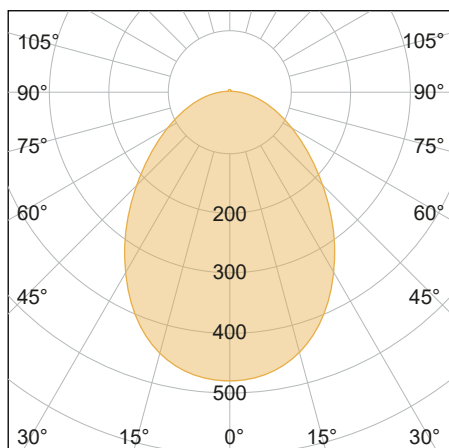

TECHNICAL DRAWING

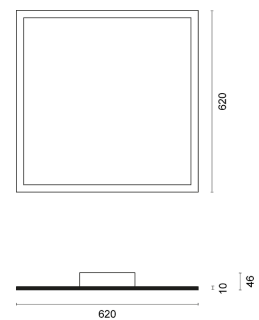

LIGHT INFORMATION

beam angle	100°
color temperature	4.000 K
color tolerance	< 5 SDCM
color rendering index	> 80

PROPERTIES

through-wiring	According to power supply
connection	According to power supply
module per circuit breaker B10A	52
module per circuit breaker B16A	83
module per circuit breaker C10A	52
module per circuit breaker C16A	83
switching cycles	> 500.000
voltage range AC	Je nach VSG

ORDER OVERVIEW

PanelLUX SLIM UGR 4.000 K	
product code	626240380011
EAN code	4260374014683
warranty	4 years

ACCESSORIES

Power supply for PanelLUX LONG (PLX-38S)
Power supply for PanelLUX LONG (PLX-38S-DA)
Power supply for PanelLUX SLIM/SLIM LONG
Cord suspension for PanelLUX SQUARE/LONG
Surface mounting frame for PanelLUX SLIM
Flush mounting frame for PanelLUX SQUARE

PERFORMANCE

luminous efficiency	103 lm/W
system performance	38 W
luminous flux	3.900 lm
dimnable	According to power supply

RESILIENCE

protection class	III
impact resistance	IK04
protection type	IP20
lifespan	> 50.000 h [L80, B10]
UV resistant	Yes
operating temperature	-25 to +45 °C
foodready	No

MATERIAL

cover	Prismatic cover
material (cover)	PMMA
material (housing)	Aluminium
housing color	White

SCOPE OF DELIVERY

several power supply options available (not included)

DIMENSION

L x W x H / Ø (H2)	620 x 620 x 10 (46) mm
weight	3,0 kg