




# ClickLUX EASY


4000K



## LIGHT DISTRIBUTION CURVE

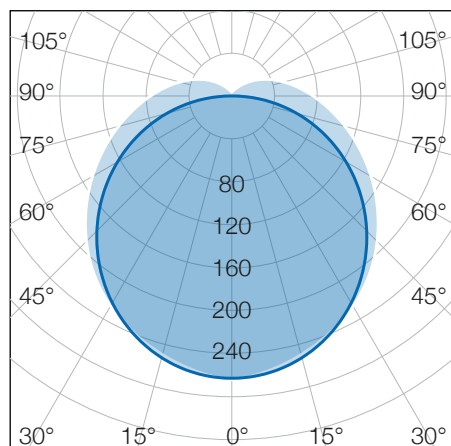

## TECHNICAL DRAWING



## LIGHT INFORMATION

beam angle	130°
color temperature	4.000 K
color tolerance	< 4 SDCM
color rendering index	> 80

## PROPERTIES

through-wiring	3 x 1,5 mm <sup>2</sup>
connection	Plug: 3-pole max. 2,5 mm <sup>2</sup>
module per circuit breaker B10A	7
module per circuit breaker B16A	12
module per circuit breaker C10A	12
module per circuit breaker C16A	20
switching cycles	> 500.000
voltage range AC	220 – 240 V AC, 50/60 Hz

## ORDER OVERVIEW

ClickLUX EASY 5000K	
product code	711540600168
EAN code	4260374017622
warranty	3 years

## ACCESSORIES

ClickLUX EASY blank module	
ClickLUX EASY Connector-Set	
ClickLUX EASY mounting clip for ceiling	

## PERFORMANCE

luminous efficiency	148 lm/W
system performance	58 W
luminous flux	8.600 lm
dimnable	Dip switch (100/50%)

## RESILIENCE

protection class	I
impact resistance	IK06
protection type	IP40
lifespan	> 50.000 h [L80, B10]
UV resistant	No
operating temperature	–20 to +50 °C
foodready	Yes

## MATERIAL

cover	diffuse cover
material (cover)	PC
material (housing)	Aluminium
housing color	Grey

## SCOPE OF DELIVERY

includes 2x chain suspensions
-------------------------------

## DIMENSION

L x W x H / Ø (H2)	1.500 x 45 x 63 (101) mm
weight	1,4 kg