


NoviLUX PRO


70



LIGHT DISTRIBUTION CURVE

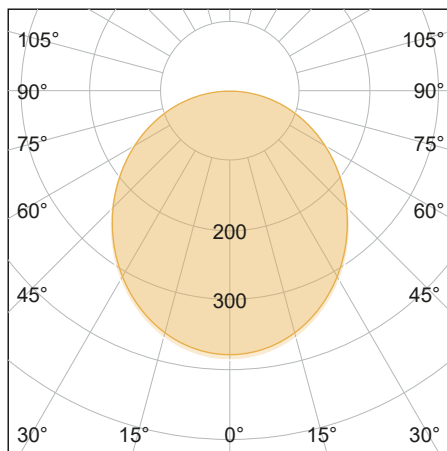

TECHNICAL DRAWING



LIGHT INFORMATION

beam angle	110°
color temperature	4.000 K
color tolerance	< 5 SDCM
color rendering index	> 80

PERFORMANCE

luminous efficiency	80 lm/W
system performance	8 W
luminous flux	.640 lm
dimmmable	No

PROPERTIES

through-wiring	No
connection	Cable: 2 x 0,75 mm², 0,2 m
module per circuit breaker B10A	49
module per circuit breaker B16A	79
module per circuit breaker C10A	82
module per circuit breaker C16A	132
switching cycles	> 500.000

RESILIENCE

protection class	II
impact resistance	IK08
protection type	IP20
lifespan	> 50.000 h [L80, B10]
UV resistant	Limited
operating temperature	–25 to +50 °C
foodready	No

MATERIAL

voltage range AC	220 – 240 V AC, 50/60 Hz
------------------	--------------------------

ORDER OVERVIEW

NoviLUX PRO 70

product code	500940070012
--------------	--------------

EAN code	4260374013860
----------	---------------

warranty	3 years
----------	---------

ACCESSORIES

No accessories available

cover	diffuse cover
-------	---------------

material (cover)	PC
------------------	----

material (housing)	PC
--------------------	----

housing color	White
---------------	-------

SCOPE OF DELIVERY

includes mounting material

DIMENSION

L x W x H / Ø (H2)	Ø 100 (70) x 40 mm
--------------------	--------------------

weight	0,2 kg
--------	--------