




# IndustryLUX FLAT NEO


234 | 30 x 100° | 4.000K



## LIGHT DISTRIBUTION CURVE

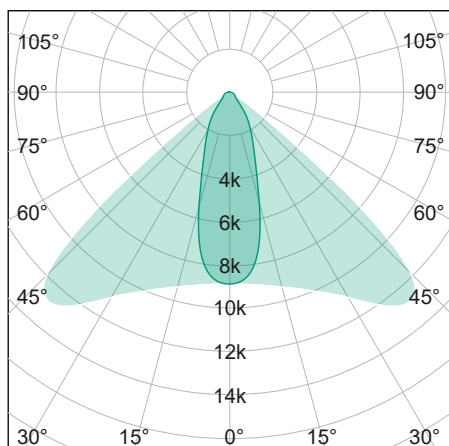

## TECHNICAL DRAWING

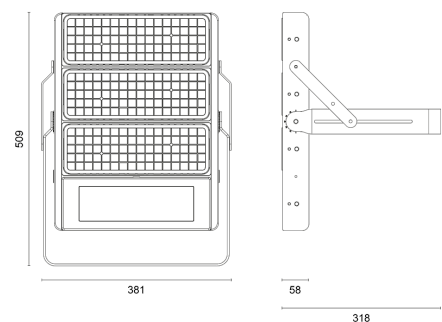

## LIGHT INFORMATION

beam angle	30 x 100°
color temperature	4.000 K
color tolerance	< 5 SDCM
color rendering index	< 80

## PROPERTIES

through-wiring	No
connection	Plug: 3-pole max. 2,5 mm <sup>2</sup>
module per circuit breaker B10A	1
module per circuit breaker B16A	3
module per circuit breaker C10A	2
module per circuit breaker C16A	4
switching cycles	> 500.000
voltage range AC	100 – 240 V AC, 50/60 Hz

## ORDER OVERVIEW

IndustryLUX FLAT NEO 234   30 x 100°   4.000K	
product code	444023310117
EAN code	4260374018261
warranty	5 years

## ACCESSORIES

No accessories available
--------------------------

## PERFORMANCE

luminous efficiency	142 lm/W
system performance	234 W
luminous flux	33.300 lm
dimmmable	No

## RESILIENCE

protection class	I
impact resistance	IK10
protection type	IP65
lifespan	> 50.000 h [L80, B10]
UV resistant	Limited
operating temperature	–40 to +50 °C
foodready	No

## MATERIAL

cover	Transparent cover
material (cover)	PC
material (housing)	Aluminium
housing color	Black

## SCOPE OF DELIVERY

includes connector plug
-------------------------

## DIMENSION

L x W x H / Ø (H2)	381 x 438 (509) x 58 (318) mm
weight	9,1 kg