




INDUSTRYLUX


274 mit Schirm Alu 80°



LIGHT DISTRIBUTION CURVE

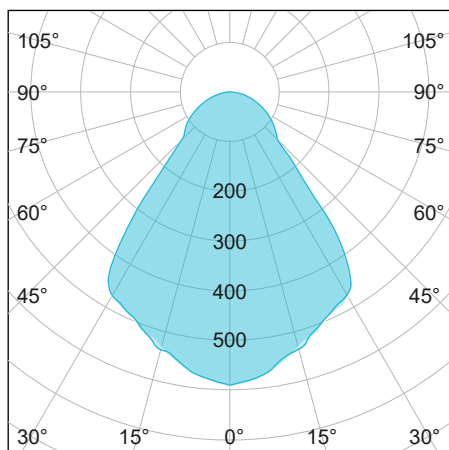

TECHNICAL DRAWING



LIGHT INFORMATION

beam angle	120°
color temperature	5.000 K
color tolerance	< 5 SDCM
color rendering index	< 80

PERFORMANCE

luminous efficiency	147 lm/W
system performance	200 W
luminous flux	27.000 lm
dimmable	No

PROPERTIES

through-wiring	No
connection	Cable: 3 x 1,0 mm², 1,5 m
module per circuit breaker B10A	1
module per circuit breaker B16A	2
module per circuit breaker C10A	3
module per circuit breaker C16A	4
switching cycles	> 500.000
voltage range AC	100 – 240 V AC, 50/60 Hz

RESILIENCE

protection class	I
impact resistance	IK06
protection type	IP65
lifespan	> 50.000 h [L80, B10]
UV resistant	Yes
operating temperature	–30 to +50 °C
foodready	No

MATERIAL

cover

Transparent cover

ORDER OVERVIEW

IndustryLUX 274 with
aluminium reflector 80°

product code	431050400022 + 430200008001
--------------	--------------------------------

EAN code	4260374011217
----------	---------------

warranty	5 years
----------	---------

ACCESSORIES

80° aluminium reflector für IndustryLUX series 274-375
--

cover	transparent cover
-------	-------------------

material (cover)	Glass
------------------	-------

material (housing)	Aluminium
--------------------	-----------

housing color	Grey
---------------	------

SCOPE OF DELIVERY

no accessory included

DIMENSION

L x W x H / Ø (H2)	Ø 300 (315) x 485 mm
--------------------	----------------------

weight	9,9 kg
--------	--------