





OfficeLUX ORB 450



LIGHT DISTRIBUTION CURVE

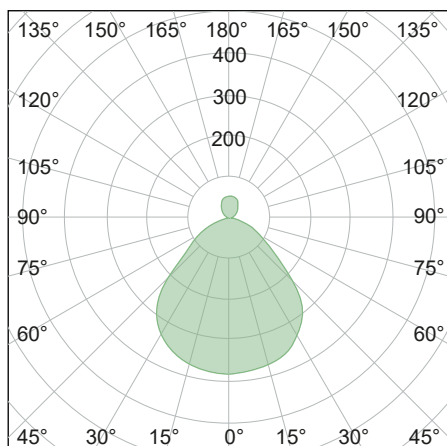

TECHNICAL DRAWING



LIGHT INFORMATION

beam angle	110° ↑ 90° ↓
color temperature	4.000 K
color tolerance	< 3 SDCM
color rendering index	> 80

PROPERTIES

through-wiring	5 x 0,75 mm ²
connection	Terminal: 5-pole max. 2,5 mm ²
module per circuit breaker B10A	29
module per circuit breaker B16A	46
module per circuit breaker C10A	48
module per circuit breaker C16A	78
switching cycles	> 500.000
voltage range AC	200 – 240 V AC, 50/60Hz

ORDER OVERVIEW

OfficeLUX ORB 450	
product code	124540030109
EAN code	4260374015680
warranty	5 years

ACCESSORIES

No accessories available

PERFORMANCE

luminous efficiency	117 lm/W
system performance	29 W
luminous flux	1.000 lm ↑ 2.400 lm ↓
dimmmable	DALI

RESILIENCE

protection class	I
impact resistance	IK04
protection type	IP20
lifespan	> 50.000 h [L80, B10]
UV resistant	No
operating temperature	–20 to +45 °C
foodready	No

MATERIAL

cover	Prismatic cover
material (cover)	PC
material (housing)	Aluminium
housing color	Silvergrey

SCOPE OF DELIVERY

includes mounting material

DIMENSION

L x W x H / Ø (H2)	Ø 450 x 45 (82) mm
weight	3,7 kg